




09/12/00

jc915 U.S. PTO

9/14/00

GeoQuest, a division of
Schlumberger Technology Corporation
Intellectual Property Law Dept
5599 San Felipe, Suite 1700
Houston, Texas 77056-2722
713-513-2515
713-513-2050 (fax)



jc820 U.S. PTO
09/659951

09/12/00

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

Docket No: **94.0034**
Total Pages: 134 pages of spec and
24 sheets of formal drawing

Re: Application of: Omer M. Gurpinar et al
For: "INTEGRATED RESERVOIR OPTIMIZATION"
Full Names of Inventor(s): Omer M. Gurpinar, David J. Rossi, Vidya B. Verma, and Philip W. Pantella

XXX 37 CFR 1.53(b) UTILITY PATENT APPLICATION TRANSMITTAL, or

____ 37 CFR 1.53(b) CONTINUING APPLICATION OF PRIOR APPLICATION NO. ____/____

- ☐ Continuation
☐ Divisional
☐ Continuation-in-part (CIP)

In accordance with 37 CFR 153(b) enclosed are:

- 1 ☒ Fee Transmittal Form - see page 2 of this transmittal form
- 2 ☒ Patent Application Total No. Pages: **134**
- 3a ☐ Informal Drawings Total No. Pages:
- 3b ☒ Formal Drawings Total No. Pages: **24**
- 4 ☒ Oath or Declaration Total No. Pages: **3 or each oath - Four oaths/declarations are included**
- 4a ☒ Newly Executed (Original or Copy) - each of the four oaths is an Original
- 4b ☐ Copy from Prior Application (37 CFR 1.63(d)) for Continuation/Divisional noted above
- 4c ☐ Deletion of Inventors (Signed Statement Deleting Inventors Named in Prior Application 37 CFR 1.63(d)(2) and 1.33(b))
- 5 ☐ Incorporation by Reference (Usable if 4b is checked) Entire Disclosure of Prior Application, from which a copy of the oath or declaration is supplied, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein
- 6 ☐ Amend the specification by inserting before the first line the sentence:
This is a ☐ continuation ☐ continuation-in-part ☐ division of
application serial no. _____ filed _____
- 7 ☐ The prior application is assigned to:

Accompanying Application Parts

- 8 ☒ Assignment Papers (Cover Sheet & document(s)) - **Four (4) Assignments are enclosed**
- 9 ☐ 37 CFR 3.73(b) Statement
☐ Power of Attorney
- 10 ☐ Information Disclosure Statement (IDS)PTO-1449
☐ Copies of Citations
- 11 ☐ Preliminary Amendment
- 12 ☒ Return Receipt Postcard (MPEP 503)
- 13 ☐ English Translation Document
- 14 ☐ Certified Copy of Priority Document (if Foreign Priority is Claimed)
- 15 ☒ Other: Certificate of Mailing by Express Mail

16. The full names of all of the inventors are as follows:

Omer M. Gurpinar
David J. Rossi

Vidya B. Verma
Philip W. Pantella

CLAIMS AS FILED				
(1) FOR	(2) NUMBERS FILED	(3) NUMBER EXTRA	(4) RATE	(5) TOTAL
BASIC FEE				\$690
TOTAL CLAIMS	42 -20=	22	x\$18	\$396.00
INDEPENDENT CLAIMS	9 -3=	6	x\$78	\$468.00
ADDITIONAL FEE FOR FILING ONE OR MORE MULTIPLE DEPENDENT CLAIMS \$260				00
TOTAL FILING FEE				\$1,554.00
RECORDING FEE <input checked="" type="checkbox"/> SEE ATTACHED PTO 1595 <input type="checkbox"/> ASSIGNMENT TO BE SUBMITTED LATER				
TOTAL AMOUNT				\$1,554.00


Please charge Deposit Account No. **07-1078** for the above written TOTAL AMOUNT and any additional fees or credit any over-payment to Deposit Account No. **07-1078**.

Please send all correspondence to the following Correspondence Address:

John H. Bouchard
GeoQuest, a division of Schlumberger Technology Corp.
5599 San Felipe, Suite 1700
Houston, Texas 77056-2722.

In the event you want to contact the attorney of record for this application, please call the undersigned, John H. Bouchard, at **713-513-2515**.

Respectfully Submitted,

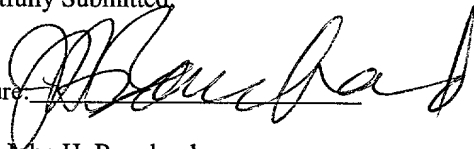Signature: 

Name: John H. Bouchard

Reg. No. 29,286


Date: September 12, 2000

"EXPRESS MAIL" Mailing Label

Number: **EK330556254US**

Date of Deposit: **September 12, 2000**

I hereby certify that this paper or fee is being deposited with the United States Postal Services
"Express Mail Post Office to Addressee" Service under 37 CFR 1.10 on the date indicated above
and is addressed to the Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

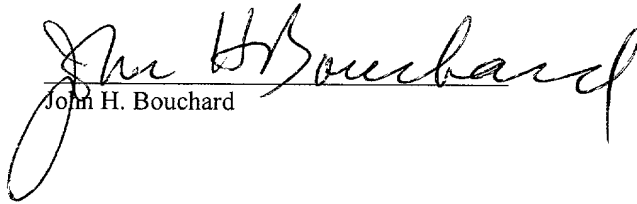
John H. Bouchard

002160" T365960

5

INTEGRATED RESERVOIR OPTIMIZATION

10

CROSS REFERENCE TO RELATED APPLICATIONS

15

This is a Utility Application of prior pending Provisional Application serial number 60/183,836 filed 02/22/2000 entitled "Method for monitoring and controlling drainage of a petroleum reservoir".

BACKGROUND OF THE INVENTION

20

The invention relates to a method known as "Integrated Reservoir Optimization" (IRO) which includes a method for monitoring and controlling the extraction of fluid and gas deposits from subsurface geological formations. This includes a method for monitoring the status of fluid and gas deposits in subsurface geological formations and controlling the location and use of physical resources and extraction rates to maximize the extraction of such deposits from the subsurface geological formations.

25

30

During the production life cycle of oil and gas extracted from reservoir fields in geological formations, certain stages are followed which include exploration, appraisal, reservoir development, production decline, and abandonment of the reservoir. Important decisions must be made at each of these stages in order to properly allocate resources and to assure that the reservoir meets its production potential. In the early stages of the production life cycle, one begins with almost

complete ignorance about the distribution of internal properties within the reservoir. As development continues, diverse types of reservoir data are collected, such as seismic, well logs, and production data. That reservoir data are combined to construct an evolving understanding of the distribution of reservoir properties in an earth formation. Therefore, the understanding of that reservoir data is key to making proper reservoir management decisions.

Various prior art approaches that the oil and gas industry has taken to reservoir management have been reported in numerous books and technical journal articles, such as are listed in the References section toward the end of this specification. For example, in the reservoir management method taught in the Satter and Thakur book cited in the References section below, short and long-term goals for managing a gas or oil reservoir are first identified. A plurality of data, which is subsequently collected about the reservoir, are then used to develop a reservoir management plan, also called a development plan. The development plan is then implemented by drilling wells, setting production and injection rates for the reservoir, and performing workover operations. As oil and/or gas is extracted from the reservoir, new data are obtained and the goals and development plans for managing the reservoir are periodically re-evaluated to maximize production of gas and/or oil from the reservoir. As the reservoir is depleted, the goals and development plans are changed, and eventually the reservoir is abandoned.

Some U.S. patents teach and claim various steps in the processes of locating and developing reservoirs, such as, but not limited to, collection of reservoir data, such as seismic, well logs and production data, locating sites for wells, controlling the rate of extraction from wells, and maximizing the rate of production from individual wells and the reservoir as a whole. Some of these patents are described in the following paragraphs.

U.S. Patent 5,992,519 to Ramakrishnan et al teaches a method and hardware for monitoring and controlling a plurality of production oil wells to satisfy

predetermined, updatable production criteria. An oil reservoir model is used in conjunction with a reservoir simulation tool in order to determine a production strategy by which oil is controllably produced from the reservoir using flow valves. Information gleaned as a result of adjustments to the flow valves is used to update the reservoir model. Oil wells are drilled based on a fixed production strategy and the fluid flow rates from the wells, as adjusted, are based on a variable production strategy.

U.S. Patent 5,706,896 to Tubel et al teaches a system for controlling and/or monitoring a plurality of production wells from a remote location. The control system is composed of multiple downhole electronically controlled electromechanical devices and multiple computer based surface systems operated from multiple locations. The system provides the ability to predict the future flow profile of multiple wells and to monitor and control the fluid or gas flow from either the formation into the wellbore, or from the wellbore to the surface. The control system is also capable of receiving and transmitting data from multiple remote locations such as inside the borehole, to or from other platforms, or from a location away from any well site.

U.S. Patent 5,732,776 to Tubel et al teaches another similar system for controlling and/or monitoring a plurality of production wells from a remote location. The multi-zone and/or multi-well control system is composed of multiple downhole electronically controlled electromechanical devices and multiple computer based surface systems operated from multiple locations. This system has the ability to predict the future flow profile of multiple wells and to monitor and control the fluid or gas flow from either the formation into the wellbore, or from the wellbore to the surface. This control system is also capable of receiving and transmitting data from multiple remote locations such as inside the borehole, to or from other platforms, or from a location away from any well site.

U.S. Patent 5,975,204 to Tubel et al teaches and claims a downhole production well control system for automatically controlling downhole tools in response to sensed selected downhole parameters without an initial control signal from the surface or from some other external source.

5

U.S. Pat. No. 4,757,314 to Aubin et al describes an apparatus for controlling and monitoring a well head submerged in water. This system includes a plurality of sensors, a plurality of electromechanical valves and an electronic control system which communicates with the sensors and valves. The electronic control system is positioned in a water tight enclosure and the water tight enclosure is submerged underwater. The electronics located in the submerged enclosure control and operate the electromechanical valves based on input from the sensors. In particular, the electronics in the enclosure uses the decision making abilities of the microprocessor to monitor the cable integrity from the surface to the well head to automatically open or close the valves should a break in the line occur.

15

U.S. Pat. No. 4,633,954 to Dixon et al teaches a fully programmable microprocessor controller which monitors downhole parameters such as pressure and flow and controls the operation of gas injection to the well, outflow of fluids from the well or shutting in of the well to maximize output of the well. This particular system includes battery powered solid state circuitry comprising a keyboard, a programmable memory, a microprocessor, control circuitry and a liquid crystal display.

20

U.S. Pat. No. 5,132,904 to Lamp teaches a system similar to the '954 patent wherein the controller includes serial and parallel communication ports through which all communications to and from the controller pass. Hand held devices or portable computers capable of serial communication may access the controller. A telephone modem or telemetry link to a central host computer may also be used to permit several controllers to be accessed remotely.

30

U.S. Patent 4,969,130 to Wason et al teaches a system for monitoring the fluid contents of a petroleum reservoir, wherein a reservoir model is employed to predict the fluid flow in the reservoir, includes a check on the reservoir model by comparison of synthetic seismograms with the observed seismic data. If the synthetic output predicted by the model agrees with the observed seismic data, then it is assumed that the reservoir is being properly modeled. If not then the reservoir model, in particular its reservoir description, is updated until it predicts the observed seismic response. The seismic survey may be periodically repeated during the productive life of the reservoir and the technique used to update the reservoir model so as to ensure that the revised reservoir description predicts the observed changes in the seismic data and hence reflects the current status of fluid saturations.

U.S. Patent 5,586,082 to Anderson et al teaches a method for identifying subsurface fluid migration and drainage pathways in and among oil and gas reservoirs using 3-D and 4-D seismic imaging. This method uses both single seismic surveys (3-D) and multiple seismic surveys separated in time (4-D) of a region of interest to determine large scale migration pathways within sedimentary basins, and fine scale drainage structure and oil-water-gas regions within individual petroleum producing reservoirs.

U.S. Patent 5,798,982 to He et al teaches a method for the mapping and quantification of available hydrocarbons within a reservoir and is useful for hydrocarbon prospecting and reservoir management.

While these patents individually teach various aspects associated with locating reservoirs, locating sites for wells, controlling the rate of extraction from wells, and attempting to maximize the rate of production from individual wells and a reservoir as a whole, none of the above cited prior art or any other patents or literature suggests or teaches integrating all these many functions into a more

comprehensive method for maximizing the production of gas and/or oil from the entire reservoir.

Thus, there is a need for a new and more comprehensive method for managing an oil and/or gas reservoir for the purpose of maximizing the production of gas and/or oil from a reservoir.

In addition, in the prior art, a development plan would be produced for a first reservoir field, an operator would make a decision from a number of alternatives available to him in relation to the first reservoir field, and then the operator would implement a particular process in the first reservoir field. At this point, the operator would focus his attention to a second reservoir field or a second property while allowing the first reservoir field or first property to be operated by a field staff and a maintenance staff. The first reservoir field would not receive any particular attention for several years when things started to go wrong in that first reservoir field. The operator would then re-focus his attention to the first reservoir field and ask how the resultant activity or results obtained from the first reservoir field or property differed from the operator's original expectations with regard to that first reservoir field. In addition, the operator would initiate a study to find out what happened with regard to the first reservoir field. This process seemed to be a "hit and miss" type of interest reflecting only a sporadic interest in the first reservoir field property.

Accordingly, in the above referenced quest to obtain a new and more comprehensive method for managing an oil and/or gas reservoir, there is a further need to provide a more organized, efficient, and automated process for automatically updating on a periodic basis the original development plan for the first reservoir field property when the resultant activity or results obtained from the first property are initially received. As a result, a new development plan can be produced for the first property and the new development plan can be

implemented in connection with that first property following the generation of the results or resultant activity from the first property.

SUMMARY OF THE INVENTION

5

Accordingly, it is a primary object of the present invention to disclose a novel and more comprehensive method for managing a fluid or gas reservoir.

10 In accordance with the above primary object of the present invention, a more comprehensive method for managing a fluid or gas reservoir is disclosed. The novel method of the present invention for managing a fluid or gas reservoir will maximize the production of oil or gas from the reservoir by bringing together all available data in order to perform a function which will hereinafter be termed 'Integrated Reservoir Optimization' or 'IRO' (a trademark of Schlumberger).

15 The 'Integrated Reservoir Optimization (IRO)' method of the present invention for managing a fluid and/or gas reservoir comprises a process involving a continuous ongoing effort to maximize the value of a reservoir property. This objective, of maximizing the value of the property, is accomplished by developing an initial development plan, partly implementing the initial development plan,

20 examining a set of results obtained from the implementing step, and confirming that the set of results do in fact agree with an initial set of projections. If the results do agree with the initial set of projections, the next step includes proceeding with the implementation of the initial development plan. As the initial development plan is implemented, a day-to-day monitoring and surveillance step

25 is implemented in order to keep track of and monitor events which occur at the property. As part of the implementation of the initial development plan, a detailed data gathering and data acquisition program is implemented in order to generate a new set of data for the purpose of gaining as much information as possible with regard to a response of the reservoir property to whatever actions

30 that have been taken by operators on the property. A feedback loop is installed whereby the new set of data (which has been gathered during the above

referenced data gathering step) is accessible to the parties who originally designed the initial development plan for the purpose of: (1) merging the new set of data into previous interpretations, (2) doing any reinterpretations which are necessary, and then (3) modifying the initial development plan in an “ongoing and iterative process” to produce another development plan. Thus, the “ongoing and iterative process” includes the steps of: (1) developing an initial development plan, (2) implementing the initial development plan, (3) refining by performing data gathering and data acquisition in order to acquire new data in response to the implementing step, (4) re-developing a new development plan based on the newly acquired data obtained during the refining step, (5) re-implementing the new development plan, (6) re-refining by performing additional data gathering and data acquisition in order to acquire further new data in response to the re-implementing step, etc. Therefore, the initial development plan is not discarded; rather, improvements are made to the initial development plan since the initial development plan is changed and modified in response to the newly acquired data. For example, the initial development plan may be changed or modified based on how the wells are completed, or how many wells are drilled, or where the wells are positioned, etc. However, in accordance with one feature of the present invention, ‘different types of data’ are obtained in response to measurements taken on a reservoir during the lifetime of the reservoir. These ‘different types of data’ range from a ‘first type of data’ which are obtained from occasional time-lapse measurements that are taken on an ‘infrequent’ basis to a ‘second type of data’ which are obtained from continuous measurements that are taken on a ‘frequent’ basis by permanently installed systems. In the prior art, the performance of reservoirs were monitored solely on an ‘infrequent’ basis and the results were used to change the reservoir development plan at certain time intervals. In contrast, in accordance with the teaching of the present invention, the performance of reservoirs is monitored and data is acquired based on measurements taken both on a ‘frequent’ basis (for wells and facilities) and on a less frequent or ‘infrequent’ basis (for repeat logging and macroscopic reservoir measurements). In addition, these ‘different types of data’ also range in spatial

development plan' in response to the two above referenced measurements taken on a frequent and an infrequent basis, a more precise determination of 'two parameters' is obtained: (1) the location of underground deposits of hydrocarbon, and (2) the pressure distribution within the subsurface geological formations.

5 When these 'two parameters' are optimized, the following 'further parameters' are also optimized: the number of wells, well completions, well interference, and production plans. When these 'further parameters' are optimized, the production of oil and/or gas from an oil or gas reservoir is maximized.

10 Accordingly, it is a further object of the present invention to disclose a method of managing a fluid (such as oil) and/or gas reservoir which assimilates diverse data having different acquisition time scales and spatial scales of coverage for iteratively producing a reservoir development plan which is used for optimizing an overall performance of said reservoir, including the steps of: (a) generating an initial
15 reservoir characterization, (b) from the initial reservoir characterization, generating an initial reservoir development plan, (c) when the reservoir development plan is generated, incrementally advancing and generating a capital spending program, (d) when the capital spending program is generated, monitoring a performance of the reservoir by acquiring high rate monitor data from a first set of data measurements
20 taken in the reservoir, (e) further monitoring the performance of the reservoir by acquiring low rate monitor data from a second set of data measurements taken in the reservoir, (f) assimilating together said high rate monitor data and said low rate monitor data, (g) from said high rate monitor data and said low rate monitor data, determining when it is necessary to update said initial reservoir development plan to
25 produce a newly updated reservoir development plan, (h) when necessary, updating the initial reservoir development plan to produce the newly updated reservoir development plan, and (i) when the newly updated reservoir development plan is produced, repeating steps (c) through (h), said reservoir being nearly depleted when the newly updated reservoir development plan is not produced during step (h).

30

It is a further object of the present invention to disclose a method of managing a fluid and/or gas reservoir, where the step (d) which monitors the performance of the reservoir by acquiring high rate monitor data further includes the steps of (d1) acquiring and accumulating and quality checking the high rate monitor data, (d2) using said high rate monitor data to evaluate a single well or a region of several wells and returning to step (c), and (d3) using said high rate monitor data to evaluate a global field or reservoir, returning to step (e) when the reservoir development plan should be updated or when new low rate reservoir monitor data should be acquired, and returning to step (c) when the reservoir development plan should not be updated or when new low rate reservoir monitor data should not be acquired.

It is a further object of the present invention to disclose a method of managing a fluid and/or gas reservoir, where the step (e) which monitors the performance of the reservoir by acquiring low rate monitor data includes the steps of: (e1) determining when new low rate reservoir monitor data should be acquired via new measurements by performing a sensitivity analysis survey predesign study to determine if the new measurements are expected to introduce new information, (e2) acquiring the new low rate reservoir monitor data when it is determined that the new low rate reservoir monitor data should be acquired and the new measurements will introduce new information, (e3) updating a reservoir model when new low rate reservoir monitor data should not be acquired via new measurements, and (e4) updating a production forecast and an economic analysis when the reservoir model is updated or when the low rate reservoir monitor data is acquired during step (e2).

It is a further object of the present invention to disclose a method of managing a fluid and/or gas reservoir, where the generating step (a) for generating an initial reservoir characterization includes performing a preliminary engineering step in parallel with a geological modeling step in order to reconcile the geoscience interpretations made using static data during the geological modeling step with the

engineering interpretations made using dynamic or performance related data during the preliminary engineering step.

It is a further object of the present invention to disclose a method of managing a fluid and/or gas reservoir, where the generating step (a) for generating an initial reservoir characterization further includes: (a1) determining for a particular reservoir field a set of development and depletion strategies, (a2) determining a set of integrated study objectives, (a3) performing data acquisition, quality control, and analysis, (a4) performing preliminary engineering, and (a5) performing geological modeling in parallel with the preliminary engineering.

It is a further object of the present invention to disclose a method of managing a fluid and/or gas reservoir, where the generating step (b) for generating an initial reservoir development plan from the initial reservoir characterization includes (b1) performing either a numerical model studies step or an analytical model studies step, (b2) generating a production and reserves forecast in response to the numerical model studies or the analytical model studies, (b3) generating facilities requirements from the production and reserves forecast, (b4) considering environmental issues in response to the development and depletion strategies determined during step (a1), (b5) performing an economics and risk analysis study while taking into account the environmental considerations, the production and reserves forecast, and the facilities requirements, and (b6) producing an optimized development plan in response to and in view of the economics and risk analysis.

It is a further object of the present invention to disclose a method of managing a fluid and/or gas reservoir, where the performing step (a3) for performing data acquisition, quality control, and analysis includes (a3.1) gathering together a first set of data relating to a particular reservoir field under study in a study plan and then gathering a set of supplemental data from alternative sources to supplement said first set of data if said first set of data is not sufficient to produce a database of data which includes a plurality of data, (a3.2) verifying that the plurality of data in

the database are consistent with each other thereby producing a verified database having a plurality of data, and (a3.3) verifying said study plan to verify that said plurality of data in the verified database is sufficient as to amount or quality or quantity, and, if said plurality of data is not sufficient, adjusting a scope of said study plan.

It is a further object of the present invention to disclose a method of managing a fluid and/or gas reservoir, where the performing step (a4) for performing preliminary engineering includes: (a4.1) knowing a 'set of fluid properties' in a reservoir fluid properties model, comparing reservoir pressures in a set of reservoir pressure survey data when the 'set of fluid properties' is known, and adjusting the reservoir pressures to a common datum thereby producing a corrected 'reservoir pressure history' which reflects the history of the reservoir pressure corrected to a common datum, (a4.2) generating a corrected well 'production and injection history' in response to the set of fluid properties and a reported field production, (a4.3) conducting production and pressure test interpretations adapted for conducting a well test of one or more wells, measuring a plurality of pressure and rate versus time test data from the one or more wells, and interpreting the test data when the set of fluid properties is known, (a4.4) determining a set of well drilling and completion histories which examines where a set of wells are drilled and how the wells are drilled and completed, (a4.5) determining a set of production enhancement opportunities in response to the well test of step (a4.3) and the drilling and completion histories of step (a4.4) to identify what immediate opportunities exist to stimulate a well or install a pump that will result in higher production rates, (a4.6) performing material balance volume and aquifer interpretations for estimating and determining, after extraction and injection of fluids into a formation, what were the original volumes of the fluids in place in the formation, (a4.7) determining an incremental rate and recovery potential for estimating incremental oil rates and potential oil recoveries associated with the production enhancement opportunities, (a4.8) determining completion workover and infill guidelines adapted for monitoring the impact of a completion workover or infill workplan, generating

additional production data, determining if the production enhancement opportunities are correct, and redesigning the completion workover of the completion workover and infill guidelines in response thereto, (a4.9) determining, in a relative permeability and capillary pressure saturation model, the flow characteristics of oil and gas and water when all exist simultaneously in a reservoir, (a4.10) investigating, in a single well or reservoir 'sector model', specific reservoir mechanisms and the impact the mechanisms have on a full field model design, (a4.11) using, in connection with reservoir mechanism sensitivity, alternative grid descriptions with one of the 'sector models' and determining which 'particular alternative grid description' better represents a mechanism which exists in the reservoir field, and (a4.12) with respect to a reservoir model design criteria, determining what must be done to properly design a reservoir model and producing a set of 'reservoir model design criteria' in response to the 'reservoir fluid properties' and the 'production injection history' and the 'reservoir pressure history' and the 'particular alternative grid description'.

It is a further object of the present invention to disclose a method for performing preliminary engineering having limitations which are similar to one or more of the limitations set forth in the above paragraph.

It is a further object of the present invention to disclose a method of managing a fluid and/or gas reservoir, where the performing step (a5) for performing geological modeling includes: (a5.1) determining a preliminary petrophysical model representing a method for converting well logs into a calculated reservoir property profile at each well location, (a5.2) determining a final petrophysical model from the preliminary petrophysical model and said preliminary engineering, said final petrophysical model representing information relating to a set of more detailed reservoir properties within said structural framework, (a5.3) determining a regional geologic model representing a regional geology in an earth formation associated with a particular reservoir field and applying a framework of sedimentology and stratigraphy to said formation during a sedimentologic and stratigraphic analyses,

095951.09200
(a5.4) in response to the sedimentologic and stratigraphic analyses, performing detailed stratigraphic correlations between wells and establishing continuity of geologic horizons across the reservoir field, (a5.5) performing a geomechanical analysis which in association with a set of geomechanical properties of the reservoir enables the conversion of time measured data from seismic into depth measurements and provides an indication of reservoir stresses which can be computed from the geomechanical properties, (a5.6) defining a structural framework of the reservoir in response to the geomechanical analysis and the detailed stratigraphic correlations, the structural framework of the reservoir describing an overall shape of the reservoir, (a5.7) defining a set of well and interval property summaries in response to said final petrophysical model and a seismic attribute analysis, the well and interval property summaries providing seismic information enabling one to relate a seismic response to a set of measured properties from well logs, (a5.8) defining a reservoir structure and property model in response to the well and interval property summaries and the seismic attribute analysis and the structural framework, (a5.9) performing reservoir volume calculations which provide an estimate of fluids in place in the reservoir in response to the reservoir structure and property model, (a5.10) comparing, in a volumes consistent decision, the reservoir volume calculations with a material balance from preliminary engineering, and, if the comparing step reveals the volumes are consistent, a geoscience interpretation of that which is underground agrees with an interpretation of the reservoir from a performance standpoint, and, if the comparing step reveals the volumes are not consistent, either adjusting said geoscience interpretation or identifying unresolved uncertainties.

25

It is a further object of the present invention to disclose a method for performing geological modeling having limitations which are similar to one or more of the limitations set forth in the above paragraph.

30

It is a further object of the present invention to disclose a method of managing a fluid and/or gas reservoir, where the performing step (b1) for performing numerical

model studies includes: (b1.1) defining a property distribution in a 3D structure and property model, (b1.2) defining a grid system in a 3D simulator grid system, (b1.3) defining a fluid property and saturation model, (b1.3) defining preliminary estimates of the extent or size of an aquifer in an initial reservoir conditions and

5 aquifer model, (b1.4) combining the property distribution and the grid system and the fluid property and saturation model and the preliminary estimates of the extent or size of the aquifer in a 3D reservoir simulator for defining a rock model in the reservoir simulator and superimposing a saturation distribution in the rock model and creating an initial reservoir model in the reservoir simulator, (b1.5) performing

10 a volumes consistent check to determine whether there is consistency in initial volumes and whether the grid system that is superimposed on the rock model is a reliable representation of a property description developed during the geological modeling step (a5), (b1.6) when there is consistency in the initial volumes, generating a corrected volume model, (b1.7) when there is not consistency, since

15 the grid system fails to reproduce the property description, adjusting, in a model property adjustments step, the grid system until the grid system is a reliable representation of the property description, (b1.9) defining historical production and injection rate constraints, (b1.10) combining the corrected volume model with the historical production and injection rate constraints for running, in a model response

20 to historic rate constraints step, the model through a historic period, obtaining a set of model responses, and comparing the model responses to actual measured performance, (b1.11) comparing, in a model reproduces history step, the model performance to the historical data to determine if the model performance reproduces the historical data, (b1.12) if the model performance did not reproduce the historical

25 data, making adjustments, in a model property adjustments step, to the model properties, (b1.13) storing and identifying the adjustments to the model properties as uncertainties in sensitivity and risk analysis, (b1.14) if the model performance did reproduce the historical data after having performed the making adjustments step and since a history calibrated model is created, generating a first output signal

30 for use by a production and reserves forecast, said first output signal including the history calibrated model and the uncertainties.

It is a further object of the present invention to disclose a method for performing numerical model studies having limitations which are similar to one or more of the limitations set forth in the above paragraph.

5

It is a further object of the present invention to disclose a method of managing a fluid and/or gas reservoir, where the performing step (b1) for performing analytical model studies includes: (b1.1) providing input data to the analytical model study, said input data including analogous reservoir performance, well drilling and completion histories, historic well performance trends, reservoir property and structure maps, and material balance volumes and aquifer model, (b1.2) from plots of production trends in the historic well performance trends, establishing a set of decline characteristics or a set of productivity characteristics of the reservoir field thereby generating well production decline characteristics which forecasts future performance trends from existing wells, (b1.3) from the historic well performance trends, mapping, in map displays of well performance indicators, several performance indicators such as the total volumes of fluids at different well sites in order to examine which areas of a reservoir field are better or worse than average or better or worse than their companions wells at the different well sites, (b1.4) comparing, in a conformance decision, the map of the performance indicators at the different well sites indicative of production quality from the map displays of well performance indicators with a geologic interpretation set forth in the reservoir property and structure maps and determining if any disagreement exists between said map and said geologic interpretation, (b1.5) if the disagreement does not exist and there is no total conformance, identifying any potential infill well opportunities reflecting any opportunities to drill any infill wells, (b1.6) if the disagreement does exist and there is total conformance, determining, in a volumetric and material balance fluids in place estimates step, how the well performance trends balance out with estimates of fluids in place and pressure support from material balance calculations, (b1.7) in response to the well production decline characteristics generating during the establishing step (b1.2), identifying workover and artificial

10

15

20

25

30

production and reserves forecast in response to the numerical model studies or the analytical model studies includes: (b2.1) in response to a plurality of constraints and to the first output signal from the numerical model studies step which includes the history calibrated model, running a model in a simulator (the simulator production and reserves forecast) and generating a production forecast representing the way a reservoir responds to a development plan, said development plan defining a mechanism representing a process that is active in the reservoir field, (b2.2) determining whether an implementation plan of the mechanism or whether the constraints can be changed or optimized, (b2.3) if the implementation plan or the constraints can be changed or optimized, changing the implementation plan of the mechanism or the constraints, re-running the model in the simulator, and generating another production forecast, (b2.4) if the implementation plan or the constraints cannot be changed or optimized, determining if the mechanism representing the process that is active in the reservoir field can be changed, (b2.5) if the mechanism can be changed which represents a new development plan or new mechanism, revising an implementation plan of the new mechanism to create a new implementation plan and re-running the model in the simulator thereby generating still another production forecast, (b2.6) if the new implementation plan or the constraints cannot be changed or optimized and if the new mechanism cannot be changed, determine if there is any need for parametric sensitivity runs, (b2.7) if there is a need for parametric sensitivity runs, identify a set of uncertainties, alter a reservoir description in the history calibrated model, and repeat steps (b2.1) to (b2.5), (b2.8) if there is no need for any parametric sensitivity runs, generating a third output signal which includes reservoir fluids production rates and pressures and total fluids injection rates and pressures for the facilities requirements step (b3) and a reservoir development plan for the economics and risk analysis step (b5), the facilities requirements step (b3) responding to that third output signal; (b2.9) in response to the plurality of constraints and the second output signal from the analytical model studies step which includes the current well forecasts of production and reserves, the enhanced well production forecasts, and the infill forecasts of production and reserves, performing, in the analytical production and

reserves forecast, analytical modeling and, responsive thereto, generating an analytical forecast for a particular mechanism and a particular set of development constraints, and (b2.10) repeating steps (b2.2) through b(2.8) until there is no need for any parametric sensitivity runs and generating a fourth output signal which
5 includes reservoir fluids production rates and pressures and total fluids injection rates and pressures for the facilities requirements step (b3) and a reservoir development plan for the economics and risk analysis step (b5), the facilities requirements step (b3) responding to that fourth output signal.

10 It is a further object of the present invention to disclose a method for generating a production and reserves forecast having limitations which are similar to one or more of the limitations set forth in the above paragraph.

It is a further object of the present invention to disclose a method of managing a
15 fluid and/or gas reservoir, where the generating step (b3) for generating facilities requirements from the production and reserves forecast includes: (b3.1) in response to that portion of the third and the fourth output signals from the production and reserves forecasts step (b2) which includes the reservoir fluids production rates and pressures, estimating a first set of facilities that are required for the reservoir fluids
20 production rates and pressures, (b3.2) determining if one or more first set of changes are required to said first set of facilities, (b3.3) if the one or more first set of changes to the first set of facilities is required, making said first set of changes to said first set of facilities, said one or more first set of changes having associated therewith a capital cost and possible incremental operating cost adapted for use by
25 the economics and risk analysis step (b5), (b3.4) in response to that portion of the third and the fourth output signals from the production and reserves forecasts step (b2) which includes the total fluids injection rates and pressures, estimating a second set of facilities that are required for the total fluids injection rates and pressures, (b3.5) determining if one or more second set of changes are required to
30 said second set of facilities, (b3.6) if the one or more second set of changes to the second set of facilities is required, making said second set of changes to said second

set of facilities, said one or more second set of changes having associated therewith a capital cost and possible incremental operating cost adapted for use by the economics and risk analysis step (b5).

- 5 It is a further object of the present invention to disclose a method for generating facilities requirements having limitations which are similar to one or more of the limitations set forth in the above paragraph.

10 It is a further object of the present invention to disclose a method of managing a fluid and/or gas reservoir, where the considering step (b4) for considering environmental issues includes: (b4.1) considering special emergency response plans and provisions, (b4.2) considering pre-construction environmental impact study requirements, (b4.3) considering interrupted or restricted access to wells and facilities, and (b4.4) considering government or regulatory approval and audit
15 provisions.

It is a further object of the present invention to disclose a method of managing a fluid and/or gas reservoir, where the performing step (b5) for performing an economics and risk analysis study includes: (b5.1) in response to the reservoir
20 development plan generated from the production and reserves forecast step (b2), evaluating a set of economics which is associated with said reservoir development plan by generating, responsive to the reservoir development plan, a reservoir production schedule and a reservoir injection schedule and a facility and well schedule, (b5.2) in response to the facilities requirements step (b3) which includes
25 processing and drilling workover plans, generating a capital cost model and an operating cost model associated therewith, (b5.3) in response to the environmental considerations step (b4), generating special project costs, (b5.4) providing, in a plan economic profile, an economic profile and a cash flow summary for the reservoir development plan in response to the reservoir production schedule, the reservoir
30 injection schedule, the facility and well schedule, the capital cost model, the operating cost model, and the special project costs, (b5.5) determining, in a

development and operating risk decision, whether there are significant development and operating risks associated with the reservoir development plan in response to a set of reservoir risk factors, (b5.6) if there are significant development and operating risks associated with the reservoir development plan, making adjustments to a set of production forecast schedules and returning to step (b5.4) which provides the plan economic profile and the cash flow summary for the reservoir development plan that produces an estimate of risk associated costs, (b5.7) if there are no significant development and operating risks associated with the reservoir development plan, determining if there is a reservoir performance risk relating to a character and a nature of the reservoir that has not been established from history matching and geologic studies, (b5.8) if there is a reservoir performance risk, making adjustments to a set of production forecast schedules and returning to step (b5.4), (b5.9) if there is no reservoir performance risk, determining if there is an environmental risk, (b5.10) if there is an environmental risk, making adjustments to a set of production forecast schedules and returning to step (b5.4), (b5.11) if there is no environmental risk, determining if there are any alternative development plans which should be evaluated from an economic standpoint, (b5.12) if there are one or more alternative development plans which should be evaluated from an economic standpoint, repeating steps (b5.1) through (b5.11) for each of the one or more alternative development plans and, responsive thereto, generating one or more corresponding economic profiles associated, respectively, with the one or more alternative development plans, (b5.13) if there are no more additional alternative development plans which should be evaluated, comparing each of the economic profiles associated with each of the alternative development plans and assessing the risks associated with each of the economic profiles, and (b5.14) selecting a particular development plan from among the one or more alternative development plans evaluated during step (b5.12), the particular development plan selected during the selecting step (b5.14) representing the optimized development plan produced during the producing step (b6).

It is a further object of the present invention to disclose a method for performing an economics and risk analysis study having limitations which are similar to one or more of the limitations set forth in the above paragraph.

5 Further scope of applicability of the present invention will become apparent from the detailed description presented hereinafter. It should be understood, however, that the detailed description and the specific examples, while representing a preferred embodiment of the present invention, are given by way of illustration only, since various changes and modifications within the spirit and scope of the
10 invention will become obvious to one skilled in the art from a reading of the following detailed description.

BRIEF DESCRIPTION OF THE DRAWINGS

15 A full understanding of the present invention will be obtained from the detailed description of the preferred embodiment presented hereinbelow, and the accompanying drawings, which are given by way of illustration only and are not intended to be limitative of the present invention, and wherein:

20 figure 1 illustrates one prior art method for managing a gas or oil reservoir;

figure 2 illustrates a detailed construction of the Developing Plan block 11 of figure 1;

25 figure 3 illustrates an alternate construction of block 24 of the Developing Plan block of figure 2;

figure 4 illustrates a new and novel method, relative to the prior art method of figure 1, for managing a gas or oil reservoir in accordance with the teachings of
30 the present invention;

figure 5 illustrates a detailed construction of the operate/monitor block 44 of figure 4;

figure 6 illustrates a detailed construction of the Reservoir Monitoring Data Assimilation & Updating block 45 of figure 4;

figure 7 includes a top half and a bottom half separated by a “Numerical Forecasting Model” decision triangle, the top half of figure 7 illustrating a detailed construction of the “Initial Reservoir Characterization” block 41 of figure 4, the bottom half of figure 7 illustrating a detailed construction of the “Generate Initial Reservoir Development Plan” block 42 of figure 4;

figure 8 illustrates a detailed construction of the Data Acquisition, QC, and Analysis block of figure 7;

figures 9A and 9B illustrate a detailed construction of the Preliminary Engineering block of figure 7;

figures 10A and 10B illustrate a detailed construction of the Geological Modeling block in figure 7;

figures 11A and 11B illustrate a detailed construction of the Numerical Model Studies block in figure 7;

figures 12A and 12B illustrate a detailed construction of the Analytical Model Studies block in figure 7;

figures 13A and 13B illustrate a detailed construction of the Production and Reserves Forecasts block in figure 7;

figures 14A and 14B illustrate a detailed construction of the Facilities Requirements block in figure 7;

figures 15A and 15B illustrate a detailed construction of the Environmental Considerations block in figure 7; and

figures 16A and 16B illustrates a detailed construction of the Economics and Risk Analysis block in figure 7.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring to figure 1, one prior art method for managing a gas or oil reservoir (as taught in the Satter and Thakur book cited in the References section below) is illustrated. Figure 1 shows a sequence of key steps comprising reservoir management. These steps consist of: setting strategy 10, Developing Plan 11, Implementing 12, Monitoring 13, Evaluating 14, Performance matches plan 16, Revising 15, and Completing 17. Each of these steps or block of figure 1 will be discussed in detail below.

Setting Strategy, block 10

In figure 1, the process begins with the Setting Strategy step in block 10 wherein short-term and long-term strategies or goals for managing the reservoir are set.

This includes reviewing: the key elements of reservoir characteristics as is generally determined from seismic logging information, the total environment of the reservoir, and the available technology for developing the reservoir.

Although one may not have a fixed strategy, one may nevertheless have several alternative strategies in mind, each of which would be designed to achieve a single goal: to produce a particular number of barrels or million cubic feet/day of oil or gas from a particular reservoir. In addition, one may have a particular schedule for achieving the above referenced production rates.

Developing Plan, block 11

In figure 1, in the Developing Plan block 11, the reservoir Development Plan is prepared. This includes integrating diverse data that are available about the reservoir (such as seismic data, well logs, core samples, geological information, production data) and developing a sound technical plan for future reservoir management. In connection with this Developing Plan block 11, one would obtain any information available with regard to a particular resource or reservoir being evaluated, supplementing that information with data available from analogous systems, for the purpose of producing a comprehensive “Development Plan” which represents a plan for developing that particular resource based on the strategy set during the “setting strategy” block 10.

Implementing, block 12

In the Implementing step of block 12, the aforementioned “Development Plan” is implemented. This “implementing step” includes designing and drilling new wells, setting well flow rates, or performing workover operations, such as cement squeeze, acidization, fracturing, gel treatments, and tubular repair that are all known in the art. During the “implementing step”, one would go out into the field and take any actions which are necessary to establish the process facilities, wellbores, transportation facility, that will enable your strategy to be met.

Monitoring, block 13 and Evaluating, block 14

As the Development Plan is being put into place during the Implementing step of block 12, new data are obtained and gathered during the Monitoring step of block 13, and, following the data gathering step, the reservoir Development Plan is continually re-evaluated during the Evaluating step of block 14. Whenever a new wellbore is drilled or whenever something new is added to the reservoir, more

information is obtained regarding the characteristics of the reservoir. The monitoring step, block 13, is very important in the early stages because this is when important capital investment decisions are being made and how efficiently your capital can be used. During the evaluating step, block 14, the data obtained during the monitoring step of block 13 is received and an attempt is made to “tie all the data together”. That is, all the received data is assimilated and “tied together” for the purpose of obtaining a picture of what the reservoir looks like or otherwise determining the characteristics of the reservoir. For example, during the evaluating step of block 14, we ask: “how do we reconcile how our wells are performing with all the other information we have obtained from other sources including seismic, wellbores, completion engineers and productivity testing?”

Performance Matches Plan, decision triangle block 16

In figure 1, if and when the ultimate reservoir performance no longer conforms to the reservoir “Development plan”, or when other conditions change, a decision is made to return, via the Revising step of block 15, to the earlier Developing Plan step of block 11 in order to revise and re-establish a new reservoir “Development plan”. As a result, the “no” output from the “Performance Matches Plan” decision triangle 16 is taken. More particularly, from the Evaluating step of block 14, the original “Development Plan” is examined. According to the original Development Plan, we needed to implement certain activities in order to achieve our strategy of obtaining a first number of barrels per day from a reservoir. However, the reservoir is actually producing a second number of barrels per day from the reservoir, which is not equal to the first number of barrels per day. Having obtained a set of new information about the reservoir, how do we change the original Development Plan in view of that new information? That is, when that new data or information is evaluated, the need for a new development of the reservoir is ascertained which is different than the original development set forth in the original Development Plan. Therefore, the original Development Plan must be revised in order to produce a new Development Plan so that the new

Development Plan can be reconciled with the new data or information. Stated differently, although the reservoir itself never changes, your interpretation of the reservoir changes. When the first three wells are drilled in the reservoir, your understanding of the characteristics of that reservoir (i.e., what the reservoir looks like) is clearly less than it will be later when you drill additional wells and perform a multitude of seismic tests on the reservoir and obtain additional data which characterize the reservoir. Therefore, when additional data, knowledge and understanding is obtained regarding the characteristics of the reservoir, the Development Plan for that reservoir must be revised accordingly.

As a result, in figure 1, the “no” output from the “Performance Matches Plan” decision triangle 16 is taken and the “Revising” step of block 15 is implemented for the purpose of revising the original Development Plan to produce the new Development Plan.

Completing, step 17

Later, if any further new data or information being evaluated during the Evaluating step of block 14 matches the new Development Plan, the “Completing” step of block 17 is reached. That is, during the Completing step of block 17, the reservoir is depleted and, as a result, the reservoir is eventually abandoned. Each of these blocks may comprise a considerable amount of work and activity. Some details of that work and activity are found in the cited ‘Satter’ reference. However, be advised that the “Completing” step of block 17 is not reached until near the end of the life of the reservoir. That is, the loop in figure 1 (consisting of the decision triangle 16, the Revising step 15, and the other steps of the loop including blocks 11, 12, 13, 14, and 16) will be traversed a multiple number of times on a continuous basis throughout the life of the reservoir field before depleting and abandoning the reservoir.

Referring to figure 2, the prior art steps involved in developing the reservoir Development Plan shown in Developing Plan block 11 of figure 1 is illustrated.

In the “Development and Depletion Strategies” block 20 of figure 2, the steps for
5 implementing an overall strategy in developing the reservoir Development Plan
are first determined. The most important facet of a reservoir Development Plan
are the strategies dealing with depletion of a reservoir to maximize oil recovery
by applicable primary, secondary and enhanced oil recovery methods that are well
known in the art. These strategies depend upon the stage in the life of the
10 reservoir. When a reservoir is first discovered, issues such as the number of
wells, well spacing, and recovery methods are the most important issues. Once
the reservoir depletion mechanism is understood, secondary and tertiary recovery
methods need to be investigated and implemented if deemed necessary.
Therefore, the Development and Depletion Strategies of block 20 are linked not
15 only to the size of the reservoir field, but also to where the field is physically
located, the political stability of the region, and any environmental issues
associated with the location of the reservoir field.

In the “Environmental Considerations” block 21 of figure 2, data pertaining to the
20 environment in the area where the reservoir field is located is gathered in order to
determine the steps required to develop the reservoir Development Plan. These
‘environmental considerations’ include: (1) ecological considerations, and (2) any
federal and/or state governmental and regulatory agency rules and regulations
which must be satisfied. For example, if a reservoir requires that water be
25 injected into a well, the environmental consideration of a mountainous region
surrounding the well coupled with tight governmental control over the water
resources around the well would impact the strategies that are available for a
particular reservoir field.

30 In the “Data Acquisition and Analysis” block 22 of figure 2, initial reservoir data
is acquired and analyzed. This initial reservoir data is obtained from the

following sources: seismic data, well logs, core data, geological information about the site of the reservoir, analysis of fluid samples obtained by performing well testing in the reservoir, and other geological or geophysical and other information gathered during exploration in the vicinity of the reservoir. At the early stages of the reservoir, the data collected from the reservoir is supplemented from outside sources. However, as the Development Plan is put into place, you have the opportunity to gather more and more data from new wells or wells coming into production. When the Development Plan coincides with the intended production rates from the wellbores in the reservoir field, the data collected which characterize the reservoir field includes seismic and wellbore interpretations, pressure measurements, and production rate measurement data. At some point, a single asset database must be created which contains and stores all of the data obtained from measurements taken in the reservoir over the lifetime of the reservoir field.

In the “Geological Modeling” block 23 of figure 2, all the above referenced data, which have been obtained during the implementation of the steps of blocks 20, 21 and 22 in figure 2, are integrated and combined in the “Geological Modeling” block 23 in figure 2 in order to create a structural and stratigraphic geological model of the reservoir. The geological model of the reservoir is derived from ‘information’ obtained from core and seismic and log measurements. However, that ‘information’ is extended by applying known concepts such as depositional environment, sequence stratigraphy, tectonism, and diagenesis. The Geological Modeling of block 23 is undertaken in order to describe the characteristics of the reservoir (i.e., to describe or ascertain what the reservoir looks like). For example, a petrophysicist looks at core analysis data and well logs to interpret properties such as porosity and water and oil saturation profiles, geomechanics look at geomechanic forces in the reservoir, geologists look at core samples in the reservoir, etc. The Preliminary Engineering phase (see figure 7) reconciles performance data obtained from the reservoir with the characteristics of the

reservoir interpreted by a petrophysicist. The intent is to produce a coherent model of the reservoir that accomodates all the data sources that are available.

In the “Numerical Model Studies” block 25 in figure 2, the geological model of the reservoir prepared in block 23 is then used in the Numerical Model Studies block 25 in order to prepare a numerical flow model of the reservoir that is used to estimate the distribution of gas and/or oil in the reservoir and its recovery potential. Recall that a petrophysicist and a geologist and a geophysicist each interpret the data and each contribute to a reservoir description that is the basis for the “Numerical Model Studies”. The petrophysicist contributes interpretations of wellbore data. The geologist receives that wellbore data and, with his knowledge of the depositional environment and seismic interpretations, he determines how these properties are distributed throughout a ‘three dimensional reservoir description’. That ‘three dimensional reservoir description’ (which is essentially a description of properties) is then introduced as ‘input data’ into the “Numerical Model Studies” block 25. The Numerical Model Studies of block 25 then, responsive to that description of properties, constructs a numerical flow model consisting of a multitude of grid blocks that represent discrete portions of the reservoir. In effect, a grid system is overlayed over the aforementioned ‘three dimensional reservoir description’ (hereinafter, a “model”). Each of the blocks of the grid system overlayed over the ‘three dimensional reservoir description’ are then assigned a specific set of properties to represent that specific portion of the reservoir. The wellbores, which have been drilled in the reservoir, are then installed into the model. The model is then tested by responding to a set of historical data of the reservoir in a ‘history matching’ test. If the model is responding differently than the observations in the field, one must then adjust, on an iterative basis, the description of that model in order that the model will ultimately reproduce that which has occurred in the reservoir in the past. At this point, we have a ‘history matched reservoir model’. The ‘history matched reservoir model’ is then used as ‘input data’ to the “Production and Reserves Forecasts” block 26 of figure 2.

In the “Facilities Requirements” block 27 in figure 2, the ‘production forecasts and associated capital investment plans’ (i.e., the future production rates information) are needed in the “Facilities Requirements” block 27 to establish requirements for physical plant facilities, such as, but not limited to, downhole and surface flow strings, pumps, separators, treaters, and surface storage that will be needed to produce oil and/or gas from the reservoir. Therefore, from the aforementioned ‘production forecasts and associated capital investment’ information, the volumes which you must be able to handle are known and the

pressure levels are also known. As a result, the facilities which are needed for those particular volumes and pressure levels are also known.

5 In the “Economic Optimization” block 28 in figure 2, the information obtained or derived from the previous blocks is analyzed in order to optimize the future economic return from the reservoir. That is, “Economic Optimization” relates to the process of deciding which of the development strategies best suits your overall corporate strategy for the particular resource or reservoir field. Generally higher recovery efficiency for a given reservoir can be achieved with higher associated
10 production costs for each incremental barrel. Therefore, the process of Economic Optimization involves the following considerations: what a company’s financial resources are, whether this is a core property, whether this is a cash cow to generate cashflow for other properties, what processes meet your minimum rate of return requirements, what is the sensitivity to oil pricing, and, coupled with
15 Economic Optimization is consideration of risk (i.e., what if the true volume of the reservoir is only 75% of what we think is the volume of that reservoir).

20 In the “Optimization Development Plan” block 29 of figure 2, the optimized economic information from block 28 is expressed as a development plan to be used for management review and approval, and then for development of the reservoir. An approved development plan is then implemented by the field or reservoir asset team. That is, having done the aforementioned risk analysis and economic projections for various depletion alternatives, a series of charts are produced for each development case which present additional considerations that
25 must be taken into account. For example, one such additional consideration might be ‘maximizing your net present value by recovering and producing less oil’. Therefore, these additional considerations are overlayed onto the above referenced considerations associated with “Economic Optimization”. At this point, the “Reservoir Development Plan” is complete, and that Development Plan
30 must now be submitted for management approval.

In the "Management Approval" block 30 of figure 2, management carefully reviews and approves the aforementioned "Reservoir Development Plan" constructed in the previous steps and work now begins to withdraw oil or gas from the reservoir. If changes to the reservoir development plan are warranted, the previously described steps in blocks 20 through 28 are repeated to derive a revised optimized Reservoir Development Plan for re-review by management.

In figure 2, although the steps of blocks 25 through 28 are illustrated as being performed sequentially, per the Satter reference, they are often performed in parallel or iteratively. One example of this consists of the group of activities set forth in blocks 25 through 28 which are enclosed by dotted line block 24 in figure 2. The Currie, Bittencourt, Beckner, and Zakirov papers listed in the References Section near the end of this detailed description describe an iterative series of steps to carry out steps 25 through 28.

Referring to figure 3, a different construction of block 24 of figure 2 is illustrated. In figure 3, block 24A represents a construction which is different than the construction of block 24 in figure 2. In figure 2, block 24 illustrates a cascading linear process where one block leads to the next block. However, in figure 3, block 24A illustrates an iterative process. That is, block 24A of figure 3 illustrates a variant prior art method for performing some of the steps in the management of oil or gas reservoirs in a non-sequential manner. The non-sequential steps in block 24A of figure 3 would replace the sequential steps in block 24 of Figure 2.

In figure 3, block 24A, the Geological Model 23 flows into the fluid flow simulator of block 31 which has a series of constraints, block 32, applied thereto. Presumably, the fluid flow simulator 31 has been calibrated or history matched. Therefore, the fluid flow simulator 31, having the constraints 32 as an input, will produce a production forecast, block 34. The production forecast 34 also include: the facilities that have been added, the wells that have been drilled, and associated

capital and operating costs which then flow into the Economic Modeling Package, block 35. From the Economic Modeling Package 35, the results obtained from the Economic Modeling Package 35 are examined, in the Optimization Criterion block 36, to determine how that case performed economically against your
5 criteria for selecting an economic process (which might include present value, rate of return, or a combination of the two, and risk). From the Optimization Criterion block 36, you would propose a method of changing the Development Plan in the Optimization Method block 37. Certain Decision Variables, block 33, must be taken into account. At this point, we reenter the Fluid Flow Simulator 31 again,
10 run a new forecast, and repeat the process. Figure 3 illustrates a better display of the activities occurring between the geologic description of the reservoir and the resultant production of a Development Plan in view of that geologic description.

In figure 3, like block 24 in Figure 2, block 24A has an input which originates
15 from the Geological Modeling block 23, and block 24A provides an output to the Optimized Development Plan block 29. The geological model of the reservoir, which is developed in Geological Modeling block 23, is input to 'Fluid Flow Simulator' block 31, along with two other inputs. An output from the 'Flow Simulator' block 31 represents a calculated flow simulation of the reservoir. One
20 of the other inputs to block 31 is information regarding physical constraints concerning the reservoir originating from 'Constraints' block 32, such as the flow capacity of an existing or a planned surface gathering network. The last input to block 31 is a set of assumptions about how the reservoir would be managed as expressed by a set of decision variables or parameters in the 'Decision Variables'
25 block 33. The 'Decision Variables' of block 33 are development scenarios which include the following: details about a future development drilling program (such as well placement), the total number of wells to be drilled, the drilling sequence, the vertical-versus-horizontal orientations, and the facilities design criteria. The facilities design criteria would include, for example, the size of oil, gas and water
30 gathering and handling facilities. The calculated flow simulation from 'Flow Simulator' block 31 is input to the 'Predicted Production Forecast' block 34

002760" 1566960

which uses it and all the information described in the previous paragraph from blocks 32 and 33 to predict potential or hypothetical well and reservoir production forecasts for each development scenario. The resulting family of production forecasts, which are output from block 34, is evaluated in the 'Economic Modeling Package' block 35. The 'Economic Modeling Package' block 35 evaluates the resulting family of production forecasts by using economic modeling processes to calculate, among other things, net present value and total economically recoverable reserves of the reservoir for each of the development scenarios. The economic modeling information derived at block 35 is input to the 'Optimization Criterion' block 36 where the criteria to be used in optimizing the reservoir development plan are selected. In the 'Optimization Method' block 37, an optimization procedure determines the best reservoir management scenario, the corresponding decision variables, the optimum development plan, and the associated set of facilities requirements. After optimization has been achieved (by however many re-iterations of the processing are necessary within blocks 31 through 37), an optimized reservoir management scenario and other information are output to the 'Optimized Development Plan' block 29, where that optimized information is related to and corresponds to a Development Plan. That Development Plan is submitted to management for management review and approval, and it is then used for all other well known activities in the development of a particular reservoir.

Referring to figure 4, a new and novel method is illustrated for managing a gas or oil reservoir in accordance with the teachings of the present invention. The new and novel method for managing a gas or oil reservoir as shown in figure 4 is an improvement to the prior art method of managing a gas or oil reservoir as shown in figure 1.

In figure 4, turning now to describe the invention, the present invention comprises a novel method, described below with reference to figure 4, for managing a fluid (e.g., oil) or gas reservoir. The novel method manages the fluid and/or gas

reservoir by continuously measuring, collecting, and assimilating different types of data obtained from different types of measurements (hereinafter, 'diverse data') for the ultimate purpose of obtaining an improved understanding of a particular reservoir. During and as a result of the continuous assimilation of the

5 aforementioned 'diverse data', a continuously updated Reservoir Development Plan is produced. The continuously updated Development Plan results in an ongoing optimization of reservoir resources as described below with reference to figures 5 through 16.

10 The aforementioned 'diverse data' comprises data acquired at different rates, the 'diverse data' ranging from 'time-lapse measurements' to 'continuous measurements' which produce data streams that are acquired with permanently installed data acquisition systems known in the art. The 'diverse data' range in spatial coverage from 'local well and surface monitoring data' to 'global

15 reservoir-scale monitoring measurements'. Examples of 'local well and surface monitoring data' include: (1) data produced during re-entry cased-hole logging, and (2) data measured by permanent pressure gauges and formation evaluation sensors placed inside and outside cased wells. These individual local well and surface monitoring data acquisition methods and apparatus are taught in the

20 Baker, Babour, Tubel, Johnson, Bussear and other references cited in the References Section at the end of this detailed description. Examples of the 'global reservoir-scale monitoring measurements' (i.e., the more spatially extensive reservoir monitoring measurements) include: (1) time-lapse or 4D seismic, (2) gravimetry, and (3) deep-reading and cross-well electrical and

25 acoustic reservoir measurements. These individual reservoir monitoring measurement methods and apparatus are taught in the Pedersen, Babour, He and other references cited in the References Section.

The industry is increasingly faced with the challenge of determining how to

30 assimilate the growing amount of incoming streams of 'diverse data' which characterize or represent a reservoir. The assimilation of the 'diverse data' is

003160T55950
065551.091200

necessary in order to: (1) update an estimate of the spatial distribution of the reservoir properties, (2) update the hydrocarbon saturation and pressure distribution in the reservoir, and then (3) modify the corresponding Reservoir Development Plans accordingly, within the constraints resultant from prior development implementation. This is particularly challenging because the plethora of incoming data streams associated with the ‘diverse data’ often comprise a mix of time scales and spatial scales of coverage. The reservoir management methodologies presented in the cited Satter reference and other cited related publications and references are not adequate to assimilate the different arrays of well and reservoir ‘diverse data’.

Figure 4 illustrates a general block diagram of a plurality of method steps in accordance with the present invention for systematically assimilating ‘diverse data’ (i.e., different types of measured data collected from a particular reservoir). The systematic assimilation of the ‘diverse data’ is required for the purpose of: (1) improving our understanding of the particular reservoir, (2) producing a continuously updated Development Plan corresponding to the particular reservoir, and (3) implementing a continuously changing plan within pre-established constraints for optimization of a plurality of resources associated with the particular reservoir in response to the continuously updated Development Plans.

In figure 4, the novel reservoir optimization method shown in figure 4, for assimilating the ‘diverse data’ having different acquisition time scales and spatial scales of coverage, differs from reservoir management practices taught in the prior art in substantial ways. That is, in accordance with one feature of the present invention, the new reservoir optimization method shown in figure 4 includes parallel execution of local (“well-regional evaluation”) and global (“field-reservoir evaluation”) data assimilation, as shown in detail in figure 5.

In figure 1, the 'Developing Plan' block 11 of figure 1 includes the 'Initial Reservoir Characterization' block 41 of figure 4 and the 'Generate Initial Reservoir Development Plan' block 42 of figure 4.

5 In figure 4, the process begins with the 'Initial Reservoir Characterization' block 41 which is operatively connected to the 'Generate Initial Reservoir Development Plan' block 42. In the 'Initial Reservoir Characterization' of block 41, an initial reservoir characterization is performed which results in the production of a reservoir model. The overall function of the 'Initial Reservoir Characterization' block 41 is generally similar to the overall function performed by the 'Data Acquisition and Analysis' block 22 and the 'Geological Modeling' block 23 in figure 2. However, in accordance with another feature of the present invention, the new and novel method by which the 'Initial Reservoir Characterization' block 41 performs the initial reservoir characterization is discussed in detail below with reference to figures 7, 8, 9, and 10 of the drawings.

In the 'Generate an Initial Reservoir Development Plan' of block 42, an initial Reservoir Development Plan is produced using the acquired, collected data. In addition, in block 42, an initial production forecast and an initial economic analysis for the reservoir are created. The overall function of the 'Generate an Initial Reservoir Development Plan' block 42 is generally similar to the overall functions performed by blocks 25 through 28 in figure 2. However, in accordance with another feature of the present invention, the new and novel method by which the 'Generate an Initial Reservoir Development Plan' block 42 produces the initial Reservoir Development Plan using the acquired data and creates the initial production forecast and the initial economic analysis for the reservoir is discussed in detail below with reference to figures 7, 11, 12, 13, 14, 15, and 16 of the drawings.

30 Therefore, in accordance with another feature of the present invention, a detailed construction of the 'Initial Reservoir Characterization' block 41 and a detailed

construction of the 'Generate Initial Reservoir Development Plan' block 42 will be discussed below with reference to figures 7 through 16 of the drawings.

In figure 4, the next step in Figure 4 is the 'Incrementally Advance Capital Program' block 43. This step is generally similar to that performed in the 'Implementing' block 12 in prior art figure 1, and it includes such activities as designing, drilling and completing wells, and implementing surface facilities. In the 'Incrementally Advance Capital Program' block 43, we have already completed the process of reservoir characterization and generating a development plan for the field. However, we still realize that there are some unresolved uncertainties. As a reservoir field gets older and we drill more and more wells, the amount of the uncertainties changes substantially. But, if we are in the early stages of reservoir field development, the Reservoir Development Plan will be strongly influenced by the drilling and production success of the initial few development wells. With a development plan calling for the drilling of 60 wells, for example, an initial budget might call for drilling only 10 of those wells. Therefore, this process calls for incrementally advancing the capital spending according to the development plan, but, at the same time, recognizing that you might need to adjust that development plan.

In figure 4, the next two steps include the 'Operate/Monitor' block 44 and 'Reservoir Monitoring, Data Assimilation & Model Updating' block 45, each of which are expanded in figures 5 and 6, respectively. In figure 4, by advancing the capital program in the 'Incrementally Advance Capital Program' block 43, more data and more information is acquired during the operating and monitoring step in the 'Operate/Monitor' block 44. In addition, the information that results from the reservoir monitoring and data assimilation and model updating step in the 'Reservoir Monitoring, Data Assimilation & Model Updating' block 45 loops back to the input of the 'Incrementally Advance Capital Program' block 43. As a result, any new interpretations that are created may subsequently affect the rate at which you continue to advance your development program. For example, if your

initial development plan calls for drilling 10 wells in the first year in a reservoir field and then drilling an additional 20 more wells in the second year, the results obtained from the drilling of the initial 10 wells might change your initial development plan. For example, instead of drilling the additional 20 more wells in the second year as called for in the initial development plan, you might instead
5 rewrite the development plan to call for the drilling of only 8 of the 20 wells and then, in addition, the running of a 3D seismic program.

In the 'Operate/Monitor' block 44 of figure 4, the day-to-day field operations are
10 managed by a day-to-day operational plan that includes wellbore and surface operations to be conducted, such as well choke settings and intervention and work-over operations. The day-to-day operational plan is derived by transforming the longer-term reservoir development plan into a sequence of day-to-day operations that meet a set of key performance indicators. In addition, in
15 block 44, constant monitoring of reservoir performance is necessary using high rate monitor data from the 'High Rate Monitor Data' block 62 to determine if the reservoir performance is conforming to the Reservoir Development Plan.

In the 'Reservoir Monitoring, Data Assimilation & Model Updating' block 45,
20 different reservoir performance is measured using low rate monitor data from the 'Low Rate Monitor Data' block 68. The high rate monitor data and low rate monitor data are both assimilated and used to determine if the reservoir model should be updated. If it is decided that the reservoir model needs updating, the reservoir model is subsequently updated accordingly.

25

In figure 4, with reference to blocks 43, 44, and 45, two things should be noted about the novel methodologies described above with reference to blocks 43, 44 and 45. First, data collected at very different sampling rates are handled differently. Acquired data obtained at a rapid sampling rate (i.e., the high rate
30 monitor data 62), such as that from wellbore and surface permanent pressure gauges, temperature sensors, and flow-rate devices, are handled differently than

acquired data obtained at lower sampling rates (i.e., the low rate reservoir monitor data 68), such as time-lapse seismic. Second, data acquired with very different degrees of spatial coverage are handled differently. That is, acquired data that are related to the wellbore and surface hydrocarbon delivery system (e.g., pressure and production data) are handled differently from acquired data that are related to the reservoir drainage process (e.g. time-lapse seismic, gravimetry, deep probing reservoir electrical data).

The steps of the method performed by blocks 43, 44 and 45 are a novel expansion upon the steps performed at the 'Implementing' block 12, Monitoring block 13 and Evaluating block 14 in figure 1 in accordance with the teaching of the present invention.

In the prior art, the performance of reservoirs is monitored but the acquired data is assimilated into the model description and development plans on an infrequent basis to change a long-term reservoir development plan. From the long-term development plan, changes in equipment and pumping rates are only made on a monthly, quarterly, semi-annual, or even longer basis. In contrast, in accordance with the teaching of the present invention, the performance of reservoirs is monitored not only on an infrequent basis to yield low rate monitor data (block 68 in figure 4), but also on a frequent basis to yield high rate monitor data (block 62 of figure 4).

In figure 6, there exists both a Reservoir Development Plan and a day-to-day Operational Plan. Both the low rate reservoir monitor data and the high rate reservoir monitor data are used to continually update the Reservoir Development Plan in the 'Update Production Forecasts and Economic Analysis' block 66 of figure 6 and the 'Update Reservoir Development Plan' block 67 of figure 6, and from that updated Reservoir Development Plan, the day-to-day Operational Plan is also continually updated. The result is a more comprehensive method for better maximizing the production of gas and/or oil from a reservoir. Exemplary sources

of high rate monitor data, block 62, and low rate monitor data, block 68, are detailed above.

Referring to figures 5 and 6, referring initially to figure 5, the method steps performed in the 'Operate/Monitor' block 44 of figure 4 are discussed below with reference to figure 5. In addition, in figure 6, the method steps performed in the 'Reservoir Monitoring, Data Assimilation and Model Updating' block 45 of figure 4 are discussed below with reference to figure 6.

In figure 5, a more detailed expansion of the method steps represented in the 'Operate/Monitor' block 44 of figure 4 is illustrated. There are four main method steps comprising the Operate/Monitor block 44 as shown in figure 5. These steps are shown as blocks 51, 52, 53 and 47.

In figure 5, the first main step in the 'Operate/Monitor' block 44 is the 'Set Key Performance Indicators & day to day operational plan' block 51. Key performance indicators may include, for example, targets for oil and/or gas delivery by individual well or sets of wells, and the surface pipeline network to the point-of-delivery.

In figure 5, the second main step in the 'Operate/Monitor' block 44 is to frequently and periodically (e.g. daily or weekly) review the key performance indicators and to define and update the associated day-to-day operational plan, as represented by the 'Review Plan' block 52. The key performance indicators are periodically assessed to determine whether or not they are being met, that is, to determine whether or not current reservoir hydrocarbon production rates are meeting the planned levels of production. If not, the day-to-day operational plan is updated (for example, to intervene and correct production problems limiting production from one or more wells) and the cycle is then repeated. The day-to-day operational plan is derived by transforming the Reservoir Development Plan into a sequence of day-to-day operations designed to meet the set of key

performance indicators defined in the 'Set Key Performance Indicators...' block 51. The day-to-day operational plan may include, for example, (a) acidizing or fracturing work-over operations to enhance well productivity, (b) cement squeeze, gel injection, or re-perforating to alter the connectivity of the wellbore with different reservoir layers, (c) balancing 5-spot or 9-spot injection off-take rates for improved drainage, (d) adjusting the downhole flowrate, and/or (e) adjustment at well heads and at surface gathering system settings, with intelligent completion systems that comprise a set of flow control devices built into the well completion. These individual techniques (a) – (d) are taught in cited prior art references, such as Tubel, listed in the References Section at the end of this detailed description.

In figure 5, the third main step in the 'Operate/Monitor' block 44 is to continuously execute the current amended day-to-day operational plan as represented at 'Execute Plan' block 53 and extract hydrocarbons from the reservoir in an optimized manner.

In figure 5, the fourth main step in the 'Operate/Monitor' block 44 is to monitor well delivery data and assimilate the data obtained by the steps performed in the 'Well Monitoring, Data Assimilation' block 47. In order to assure that the short-term key performance indicators are being met, and to adjust the day-to-day operational plan to meet the short-term key performance indicators, oil and/or gas delivery rate data from different wells in the reservoir are monitored by types of monitoring apparatus well known in the art. The data are then processed at 'Well Monitoring, Data Assimilation' block 47 to determine if the short-term key performance indicators are being met and to adjust the day-to-day operational plan if necessary to meet those key performance indicators. To do this, high rate monitor data from the wells (see 'High Rate Monitor Data' block 62) are first acquired, accumulated and quality checked at 'Acquire & Accumulate Data, QC' block 54 in figure 5. The 'high rate monitor data' are typically readings of well or surface pressures and oil-water-gas flow rates from each well, which are measured using well known pressure gauges, temperature sensors, flow-rate

002160155550

devices and separators. The ‘high rate monitor’ data are used in two very different ways in the process performed at ‘Well Monitoring, Data Assimilation’ block 47. These two different uses are described in the following paragraphs for each of: (a) the evaluation of a “localized” or single well, or regional/several wells in an area in the ‘Well - Regional Evaluation’ block 55; and (b) the evaluation of a global field or reservoir in the ‘Field – Reservoir Evaluation’ block 58.

In figure 5, the step of evaluation of a single well or regional/several wells is accomplished in the ‘Well – Regional Evaluation’ block 55. To perform this step in the process, the trends in the accumulated and checked high rate monitor data are first generated and then reviewed in the context of the single well or regional/several well performance in the ‘Review Trends and Well –Regional Performance’ block 56. This includes, for example, a review of bottom-hole and surface flowing pressures, multi-phase flow rates, etc, that are used to indicate the degree to which the single well or several wells is meeting production potential. Such data provide various diagnostic information, including water and/or gas breakthrough in oil producing zones, differential pressure decline in different layers, and skin buildup that impedes fluid movement in the vicinity of the wellbore. Also included in this evaluation is the analysis of data coming from ‘in situ’ reservoir formation evaluation sensors inside and outside well casings, such as an array of electrical resistivity electrodes to monitor the movement of formation water behind the well casings. Such electrical resistivity arrays are taught in the cited Babour reference.

In figure 5, the single well or regional / several well production model is then verified and/or updated in the ‘Verify / Update Well – Regional Model and plan’ block 57. The well or local reservoir model is updated to include the latest measurements of oil, gas and water saturation distribution around the well, as well as improved understanding of the well bore skin factor, storage, and connectivity architecture evidenced by uneven pressure decline.

In figure 5, the step of evaluation of a global field or reservoir is accomplished in the 'Review Trends and Field – Reservoir Performance' block 59. To perform this step in the process, trends in the high rate data from 'High Rate Monitor Data' block 62 are first generated and then reviewed in the context of the field or reservoir performance in the 'Review Trends and Field-Reservoir Performance' block 59. This includes bottom-hole and surface shut-in pressures and/or transient testing responses, multiphase flow-rate, etc, that indicate the degree to which the reservoir or a sector of the reservoir is draining during production.

10 In figure 5, the global field or reservoir model is then verified at 'Verify/Update Field – Reservoir Model' block 60. Discrepancies between the global field – reservoir model and the field reservoir performance may be observed, such as for example, different saturation distributions and/or different pressure distributions across the reservoir and/or between the reservoir zones, suggesting that the reservoir model and/or the reservoir development plan should be updated.

In figure 5, based on the results of the evaluation at 'Field – Reservoir Evaluation' block 58, it may be decided to update the Reservoir Development Plan and/or to consider acquiring additional low rate reservoir monitor data. This is done in the 'Update Reservoir Development Plan or Consider Acquiring Reservoir Monitor Data' decision triangle 61 in figure 5. The Reservoir Development Plan may need modifying, for example, if pressures are found to be declining in an uneven manner across the reservoir, suggestive of a sealing fault with an undrained reservoir compartment that requires additional in-fill drilling. Or, additional/new low rate reservoir monitor data may be considered if a sufficient time has elapsed since the last reservoir monitoring data (e.g. time-lapse seismic) were acquired, and another survey is needed. If the decision is made to update the Reservoir Development Plan or to consider acquiring new reservoir monitor data, the process goes to the 'Reservoir Monitoring, Data Assimilation & Model Updating' block 45 in figure 4, the detailed step(s) of which are described with reference to figure 6. If the decision is made not to update the Reservoir Development Plan or

to consider acquiring new reservoir monitor data, the process goes to the
'Incrementally Advance Capital Program' block 43 in Figure 4.

As illustrated in Figure 4, the results output from 'Operate/Monitor' block 44 can
5 continue to loop back to the input of 'Incrementally Advance Capital Program'
block 43 to be re-processed therein, before again being processed in the
'Operate/Monitor' block 44 wherein the step in 'Set Key Performance Indicators'
block 51 of figure 5 is redone to assure that the short-term reservoir management
operational goals are being met. When it is affirmatively decided to update the
10 Reservoir Development Plan or to consider acquiring new reservoir monitor data
in decision block 61 of figure 5, the process moves to the less frequent, low rate
(e.g. monthly or yearly) updating activity shown as multiple steps in the
'Reservoir Monitoring, Data Assimilation and Model Updating' block 45 in
figure 4, the detailed steps of which are described herein with reference to
15 figure 6.

In figure 6, entry into the analysis process steps shown in figure 6 occurs under
two circumstances. Either the high rate reservoir monitor data from block 62 and
processed in blocks 54 and 58 in figure 5 have indicated that the reservoir model
20 and accompanying Reservoir Development Plan need modifying, or it is
appropriate to consider the acquisition of new low rate reservoir monitor data.
Accordingly, a decision is made in the 'Consider New Data' decision triangle 49
whether or not to consider acquiring new low rate (infrequent) reservoir monitor
data. This low rate monitor data includes, for example, time-lapse seismic, repeat
25 through-casing borehole data such as deep-reading vertical seismic profiles,
gravimetry, sonic imaging, and cross-well or behind-casing deep-reading
monitoring measurements, such as electrical resistivity. As mentioned previously,
electrical resistivity measurements are described in the cited Babour reference.

30 In figure 6, if the decision made in the 'Consider New Data' decision triangle 49
is 'Yes', the first step is to perform a study in the 'Sensitivity Analysis, Survey

Pre-design' block 69. The objectives of the process steps in block 69 are first to assure, before expending resources developing and executing a reservoir monitoring operation, that the measurements are expected to bring needed information. In particular, a time-lapse reservoir monitoring system is numerically simulated in order to predict what sensor measurements would hypothetically be provided by such a system if it were implemented. This step allows the user to identify whether or not the expected signal is large enough to be detected and has the potential to provide the anticipated benefits. The second objective at block 69 of figure 6 is to use the same reservoir monitoring numerical modeling procedures to optimize the design of the monitoring sensor hardware and data acquisition system.

In figure 6, based on the 'sensitivity analysis survey and survey pre-design' at block 69, a decision is made, in the 'Proceed' decision triangle 63, whether or not to proceed with collecting and analyzing low rate reservoir monitoring data. If the decision is 'No' in the 'Proceed' decision triangle 63, the process leads to the 'Incrementally Advance Capital Program' block 43 in figure 4. If the decision is 'Yes' in the 'Proceed' decision triangle 63, the process leads to the block entitled 'QC, Process, Direct Interpretation' block 64 where the acquisition of new low rate reservoir monitor data, such as time-lapse seismic or deep electrical measurements, is obtained, checked, processed and interpreted. To be used for this purpose, an input to this step is the low rate (infrequent) reservoir monitor data from the 'Low Rate Monitor Data' block 68. More particularly, in block 64, the low rate reservoir monitor data are first quality checked, processed, and directly interpreted. For seismic data, this activity is similar to the traditional 3D seismic processing activity. For electrical resistivity array measurements, this activity is a direct processing of the electrical data, for example, by numerical inversion methods. Under favorable conditions, the outcome of this step is a "snapshot" or a view of the probed part of the reservoir at the time period of the data acquisition. This view of the reservoir can provide information about the patterns or spatial distribution of fluids in the reservoir such as oil, water and gas.

The direct interpretation step in block 64 of figure 6 may require use of the existing reservoir model information, for example, the model developed during the characterization in the 'Initial Reservoir Characterization' block 41 in figure 4, or an updated model from a previous iterative activity in the 'Update Reservoir Model and Uncertainties' block 65 in Figure 6.

In figure 6, in certain cases, the result of the direct interpretation step in block 64 of figure 6 is itself sufficient to determine opportunities to enhance reservoir drainage, e.g. identifying, through time-lapse seismic, a fault block that has not drained, or identifying, through time-lapse electrical mapping, a layer with unswept oil. In this case, the process may proceed directly to the steps performed in the 'Update Production Forecasts And Economic Analysis' block 66 in figure 6 where an economic analysis to justify the investment is performed before the Reservoir Development Plan is updated in the 'Update Reservoir Development Plan' block 67 in order to incorporate appropriate plans, e.g. to drill additional well(s) to drain a fault block.

In other cases, more advanced treatment of the data from 'Low Rate Monitor Data' block 68 is needed to update the model for the distribution of reservoir properties and the associated uncertainties at 'Update Reservoir Model and Uncertainties' block 65. This may be the case in very heterogeneous reservoirs or reservoirs in which more than one property is varying at a time and multiple data measurement types are acquired. This is described in the cited 'Yu' reference. In this case, in the 'Update Reservoir Model and Uncertainties' block 65, the processed low rate monitoring data from the 'QC, Process, Direct Interpretation' block 64 are combined with all other available reservoir information, including 'high rate monitor data' from block 62 in figure 5. The activity in the 'Update Reservoir Model...' block 65, of updating the reservoir model and associated uncertainties, may alternatively be entered directly from the 'Consider New Data' decision triangle 49 as shown. The fluid flow simulator model is altered to reproduce the acquired reservoir production data by history matching as is taught

in the cited Guerillot, Stein and Wason references. The degree of uncertainty in the reservoir simulator parameters is re-computed to account for the new reservoir measurements.

5 In figure 6, the updated reservoir model and uncertainties information produced from the 'Update Reservoir Model...' block 65 are used to re-compute production forecasts in the 'Update Production Forecasts and Economic Analysis' block 66 in figure 4, and the Reservoir Development Plan is then updated in the 'Update Reservoir Development Plan' block 67. The details of this procedure are similar
10 to the process previously described with reference to figure 3.

In figures 4 and 6, the 'output' from the 'Update Reservoir Development Plan' block 67 in figure 6 is as follows: a periodically updated Reservoir Development Plan and description of the reservoir performance, uncertainties, and future
15 production forecasts. As shown in figure 4, the output of block 67 of figure 6 continues to loop back to the input of the 'Incrementally Advance Capital Program' block 43 in order to continue carrying out the 'Incrementally Advance Capital Program' step in block 43 and the 'Operate/Monitor' step in block 44.

20 Thus, unlike anything known or taught in the prior art, 'diverse data', having different acquisition time scales and spatial scales of coverage, is systematically assimilated for improved reservoir understanding which thereby insures a continually updated Reservoir Development Plan for an ongoing optimization of reservoir resources.

25 Referring to figure 7, a detailed construction of the 'Initial Reservoir Characterization' block 41 of figure 4, and a detailed construction of the 'Generate Initial Reservoir Development Plan' block 42 of figure 4 is illustrated.

30 In figure 7, in accordance with another feature of the present invention, the 'developing plan' block 11 of figure 1 includes the 'initial reservoir

In figures 2 and 7, recall that figure 2 represents a prior art method for developing a development plan and figure 7 represents a method in accordance with the present invention for developing a development plan. Comparing figures 2 and 7, in accordance with another feature of the present invention, it is evident that the following differences exist between figure 7 and figure 2.

30 Modeling' 41e in order to determine a unified interpretation of what the reservoir
actually looks like. That is, block 41d is being performed in parallel with block

41e, using dynamic data (well performance, production and injection rates, reservoir pressure) in an effort to verify the interpretations made by the geoscience group based on static data (i.e., measurements made at a specific point in time from well logs, seismic). That is, in figure 7, block 41d is being performed in parallel with block 41e (before we create the first version of the numerical simulator) in order to reconcile the geoscience interpretations made using static data with the engineering interpretations made using dynamic or performance related data. This is different from the prior art shown in figure 2 because, in figure 2, in most cases, the prior art was conducted in a linear stepwise fashion; that is, the geologic modeling was done in a specific sequence before handing that interpretation to the reservoir engineers for their adjustment.

In figure 7, the 'Preliminary Engineering' block 41d and the 'Geological Modeling' block 41e are each input to a decision triangle 70 entitled "Numerical Forecasting Model?". The decision triangle 70 asks: do I want to use a rigorous scientific approach to build a numerical simulator to generate a production forecast (the "Yes" output from triangle 70), or do I want to use various standard analytical methods (i.e., decline curve analysis, etc) to generate the production forecast (the "No" output from triangle 70)? This decision triangle 70 recognizes that, for some field development planning in some locations, depending upon the stage of development at the time, you may not go through a full simulation process to produce a development plan. For a resource that is more minor in size for which you have limited data, you may find that there is a neighboring field that was exploited 15 years earlier that has a lot of performance data and what you must do is produce a development plan that accomodates the kind of performance that you saw in the neighboring field. Rather than going through the extended process of building an extended simulator to run a forecast, we can review the neighboring field, see how the wells in that field performed, make certain adjustments that recognize the unique character of our geologic description compared to the neighboring field, determine production forecasts (using basic engineering analysis) for various development scenarios and from those forecasts,

determine economic analyses and select the best such economic analysis. Thus, this is an alternative way of determining a production and reserves forecast without going through the entire numerical modeling process.

- 5 In figure 7, the 'yes' output from the decision triangle 70 is input to the 'Numerical Model Studies' block 42a, and the 'no' output from the decision triangle 70 is input to the 'Analytical Model Studies' block 42b. In either event, when the steps in block 42a (the numerical studies) or the block 42b (the analytical studies) are performed, the production and reserves forecast in the
- 10 'Production and Reserves Forecast' block 42c will be generated.

- In figures 2 and 7, referring initially to figure 2, note that the 'environmental considerations' block 21 in figure 2 is located between the 'Development and Depletion Strategies' block 20 and the 'Data Acquisition and Analysis' block 22;
- 15 however, in figure 7, the 'environmental considerations' block 42d is located between the 'development and depletion strategies' block 41a and the 'economic & risk analysis' block 42f. From a qualitative standpoint, in figure 2, it is correct to place the 'environmental considerations' block 21 between the 'development and depletion strategies' block 20 and the 'data acquisition and analysis' block 22
- 20 because the environmental considerations may function as a screen when determining what strategies of the 'development and depletion strategies 20' to adopt. However, in figure 7, the larger part of the impact of the environmental considerations in the 'Environmental Considerations' block 42d is on the 'Economic and Risk Analysis' (of block 42f) of the preferred depletion
- 25 mechanism. That is, in figure 7, the 'environmental considerations' 42d have an impact on economic optimization (i.e., economic analysis and risk) 42f because various depletion plans associated with a particular project may have various environmental considerations associated with them.
- 30 In figure 7, note that the 'Production and Reserves Forecasts' block 42c has two outputs. One output goes directly to the 'Economics & Risk Analysis' block 42f

for revenue calculations because the production and reserves forecast 42c is the basis for calculating cash flows in your revenue stream. The other output goes to the 'Facilities Requirements' block 42e because the production and reserves forecast 42c imposes demands on capital investment for the facilities (i.e., what kind of facilities do you need which is related to future capital investment). An output from the 'Facilities Requirements' block 42e goes to the 'Economics & Risk Analysis' block 42f because, when you define the size and the specs of the facilities you need, the size/specs of the required facilities will represent your estimate of capital investment that is required by the 'economics and risk analysis' block 42f.

I. Initial Reservoir Characterization, block 41 in figure 7

A. Integrated Study Objectives, block 41b

In figure 7, starting with block 41 entitled 'Initial Reservoir Characterization', the first block which is connected to the 'development and depletion strategies' 41a block is the 'Integrated Study Objectives' block 41b. In connection with the 'Integrated Study Objectives' block 41b, after you have determined what your alternative 'development and depletion strategies' 41a are for a particular reservoir field, but before you begin gathering data, you must first determine the objectives and the scope of the study that you are about to perform. That is, your different needs and the availability of required data are jointly going to impact what your objectives or expectations will be for the study that you are about to perform.

B. Data Acquisition, Quality Control (QC), and Analysis, block 41c

Referring to figure 8, a detailed construction of the 'Data Acquisition, Quality
5 Control (QC), and Analysis' block 41c of figure 7 is illustrated.

In figures 2, 7 and 8, the 'Data Acquisition, QC, and Analysis' block 41c in
figure 7 corresponds to the 'Data Acquisition and Analysis' block 22 in figure 2.
However, in figure 8, the detailed construction of the 'Data Acquisition, QC, and
10 Analysis' block 41c of figure 7 is new and novel and that detailed construction
shown in figure 8 sets forth a third new and novel feature of the present invention.

In figure 8, now that the objectives or expectations for the study have been
determined via the 'Integrated Study Objectives' block 41b, it is important to
15 ensure that all necessary data sources are available. The first source of data are
well logs and seismic measurements on the field for which you are conducting the
development planning; that is, you must gather together all data that you can find
for a particular reservoir field under study. Thus the block 'Field Data in Digital
or Paper Media' 41c1 represents all such data including well logs and seismic
20 data that has been gathered together for this particular reservoir field under study.
Then, in connection with the 'Sufficiency Verification' decision triangle 41c2 of
figure 8, you must ask, 'is that data sufficient for what you have in mind in the
study in order to meet its objectives?'. If that data is not sufficient, the 'no'
output from the decision triangle 41c2 leads to 'Supplemental Data and
25 Information Sources' block 41c3. In the block 41c3, you look for supplemental
data from alternative sources (such as companion fields, similar formations and/or
similar operating practices) and then supplement your specific field data with
outside sources. When the data gathered together during block 41c1 is combined
with the supplemental data gathered together during block 41c3, the result is a
30 'Unified Project Digital Database', block 41c4. On the other hand, if the data
gathered together during block 41c1 is sufficient, the output from the decision

triangle 41c2 is 'yes' and the result is the 'Unified Project Digital Database'. This database constitutes everything you anticipate needing to meet your objectives, some of it from your field, and some of it from literature sources.

5 In figure 8, as previously mentioned, the detailed construction of the 'Data Acquisition, QC, and Analysis' block 41c of figure 7, as shown in figure 8, is new and novel and that detailed construction shown in figure 8 sets forth a third new and novel feature of the present invention. For example, in figure 8, the 'supplemental data and information sources' step set forth in block 41c3 is
10 believed to be new and novel and therefore the 'supplemental data and information sources' block 41c3 in figure 8 constitutes another feature of the present invention.

In figure 8, now that the 'unified project digital database' has been created, it is
15 now necessary to start verifying that various pieces of information are consistent with each other, as set forth in the 'Consistency Verification' decision triangle 41c5 in figure 8. For example, you may have collected reservoir fluid samples from the reservoir by different techniques and from different well locations, and you subjected them all to a series of lab tests. However, the lab tests have given
20 you different results. Which one is right, or are they all right? You progress through this process to identify the base values that you are going to use in your future calculations, and you identify, at the same time, the uncertainties associated with some of those properties. Therefore, in figure 8, the 'Uncertainties for Sensitivity and Risk Analysis' block 41c6 will identify those uncertainties. For
25 example, the 'uncertainties' might be the fact that you do not know exactly the fluid properties, the volume factor, or the gas content. You then retain those uncertainties which may be addressed later during the model calibration or history match phase, or perhaps later during the production forecasting. When all the consistency checks are performed (via block 41c5) on all your input data sources,
30 and either reconciled them or chosen base values or identified error ranges (which you need address), you now have produced is a 'Verified Project Digital

Database', block 41c7 in figure 8. At this point, in connection with your original concept of the study plan to address the objectives, you must question whether you can still accomplish the task reasonably well given the amount, quality and quantity of data that you have, or should you modify the study plan, or should you do something different in the study to accommodate either a shortage or an excess of data. Thus, in figure 8, in connection with the decision triangle 'Study Plan Verification' block 41c8, if the original study plan still remains valid, take the 'yes' output from decision triangle 41c8 and drop down and begin the 'Preliminary Engineering' 41d and 'Geological Modeling' 41e work. However, if the original study plan does not remain valid (adjustments are needed), take the 'no' output from decision triangle 41c8 and enter block 41c9 in figure 8 entitled 'Required Project Scope or Workflow Changes'. In block 41c9, start by identifying proposed changes that must be added or incorporated into the study scope, and, knowing those proposed changes to the study scope, begin your technical analysis with the adjusted changes to the study scope.

C. Preliminary Engineering, block 41d

Referring to figures 9A and 9B, a detailed construction of the 'Preliminary Engineering' block 41d of figures 7 and 8 is illustrated. The detailed construction of the 'Preliminary Engineering' block 41d of figures 7 and 8, as shown in figures 9A and 9B, is new and novel and that detailed construction shown in figures 9A and 9B sets forth a fourth new and novel feature of the present invention.

In figures 9A and 9B, the basic data and information being input to the 'Preliminary Engineering' studies of block 41d in figures 9A and 9B are: (1) the 'field production and injection database' block 41d1, (2) the laboratory tests or estimates of reservoir fluid properties in the 'reservoir fluid properties model' block 41d2, and (3) measurements of reservoir pressure that have been taken when wells were first completed and periodically thereafter in the 'reservoir pressure survey data' block 41d3. The above referenced data in blocks 41d1,

41d2, and 41d3 need to be manipulated or adjusted in order to do subsequent engineering calculations. For example, the field production of block 41d1 will be recorded from measurements on tanks or gauges. The reservoir fluid properties of block 41d2 must produce a consistent reservoir voidage in the formation for each unit of production measured at the surface. In connection with the 'reservoir fluid properties model' of block 41d2 in association with the 'reservoir pressure survey data' of block 41d3, when comparing reservoir pressures (see 'reservoir pressure survey data' of block 41d3), they must be adjusted to a datum.

Therefore, you must know the fluid properties (see 'reservoir fluid properties model' of block 41d2) in order to calculate the pressure gradients in the reservoir and do the adjustment properly to a common datum. Therefore, with regard to the 'reservoir pressure survey data' of block 41d3, when you do the adjustments bearing in mind the reservoir fluid properties, the result is the 'corrected reservoir pressure history' of block 41d4, which reflects the history of the reservoir pressure corrected to some datum. In addition, by taking the reservoir properties in the 'reservoir fluid properties model' of block 41d2 in combination with the reported field production in the 'field production and injection database' of block 41d1, the result is a corrected well production history in the 'corrected well production and injection history' of block 41d5. In connection with the 'production and pressure test interpretations' block 41d6, when installing test equipment in a well to measure either its production capacity or the static reservoir pressure in the vicinity of the well, you will be conducting a well test and you will gather pressure and rate versus time data over a period of a few hours to a couple of weeks. In this case, you must import the reservoir fluid property data from the 'reservoir fluid properties model' of block 41d2 to enable an interpretation of the test data. As a result, the output of the 'production and pressure test interpretations' block 41d6 serves as an input to the 'production enhancement opportunities' block 41d7. That is, the analysis of the well test, which is the output from the 'production and pressure test interpretations' block 41d6, will give you an idea (when those analysis results are compared with the reported production rates) whether that well is performing according to your

sector models' block 41d16, the reservoir fluid properties from block 41d2, the relative permeability from block 41d15, and the geologic descriptions from block 41e all come together in the 'single well or reservoir sector models' block 41d16 which represent preliminary models. If you regard a 'full field model' as something that is extended over the entire field, the 'single well or reservoir sector models' will investigate specific reservoir mechanisms and the impact those mechanisms have on the full field model design. For that reason, an output from the 'single well or reservoir sector model' block 41d16 flows into the 'reservoir mechanism sensitivity' block 41d17 where you might use alternative grid descriptions with one of these 'sector models' from block 41d16 and determine which such alternative grid description does a better job of representing the mechanism that you expect to have in the field. The output from the 'reservoir mechanism sensitivity' block 41d17 is an input to the 'reservoir model design criteria' block 41d13. In connection with block 41d18 entitled 'field model grid criteria and pseudo functions', some mechanisms will require a very detailed grid design in order to reliably represent multiple fluids flowing at the same time. In very large reservoirs, if your sector model studies say that you need very small grid blocks and you have a very large reservoir, the size of the model was too large to use on any computer system. One approach was to take these sector models and adjust the basic relative permeability flow functions to utilize certain so-called 'pseudo functions'.

D. Geological Modeling, block 41e

Referring to figures 10A and 10B, a detailed construction of the 'Geological Modeling' block 41e of figures 7 and 8 is illustrated. The detailed construction of the 'Geological Modeling' block 41e of figures 7 and 8, as shown in figures 10A and 10B, is new and novel and that detailed construction shown in figures 10A and 10B sets forth a fifth new and novel feature of the present invention.

In figures 10A and 10B, a particular reservoir is located in a particular basin and there is a particular regional geology associated with the formation in that basin in that area of the world. Consequently, we start with a 'regional geologic model' in block 41e1 which gives us a range of characteristics. This model in block 41e1 is the starting point from which we develop a more detailed and specific description for the reservoir for which we are trying to produce a development plan. In the 'preliminary petrophysical model' of block 41e2, this model 41e2 is generally based on well logs. Therefore, the 'preliminary petrophysical model' 41e2 is a way to convert well logs, drill cutting samples, and possibly special core studies into a calculated reservoir property profile at each well location. Thus, for each foot of depth that is traversed by a particular wellbore, a plurality of data measurements, such as formation density, resistivity, radioactivity, acoustic velocity and other parameters, may be processed with known techniques to yield reservoir properties (such as porosity, saturation of hydrocarbon, and the type of rock) for input into the 'preliminary petrophysical model' 41e2. In figures 10A and 10B, one new feature of the 'geological modeling' block 41e in figures 10A/10B relates to a new connection 72 between the 'preliminary engineering' block 41d in figure 10A and the 'final petrophysical model' 41e3. There is a need to bring in results from the 'preliminary engineering' block 41d, via the new connection 72, to verify various aspects of the geological model. One particular problem relates to calibrating the petrophysical model. Such calibration of the petrophysical model is needed, for example, when distinguishing the difference between water saturation and oil saturation in the reservoir. Thus, there is an input from the engineering studies at the 'preliminary petrophysical model' 41e2 to arrive at a 'final petrophysical model' 41e3. In connection with the 'sedimentologic & stratigraphic analyses' block 41e4, the 'geological model' 41e in figures 10A/10B carries with it a certain framework of sedimentology and stratigraphy that the geologists would be applying to the formation in a qualitative sense. In addition, in connection with the 'detailed stratigraphic correlations' block 41e5, having an input from the 'sedimentologic & stratigraphic analyses' block 41e4 enables the geologists to perform detailed stratigraphic correlations

between wells and to establish a continuity of geologic horizons across the reservoir. In connection with the 'geophysical interpretations' block 41e6, there would also be an input from the 'geophysical interpretations' block for identifying, in the 'detailed stratigraphic correlations' block 41e5, those structural correlations across the reservoir. In connection with the 'geomechanical analysis' block 41e7, geomechanical analysis and the geomechanical properties of the rock enables the conversion of time measured data from seismic into depth measurements. In addition, it also gives an indication of reservoir stresses which can be computed from geomechanical properties, the reservoir stresses allowing you to interpret whether or not you can expect to see faulting and fracturing in the reservoir. Therefore, the 'geomechanical analysis' block 41e7 provides an input into the 'geophysical interpretations' 41e6 as well. In connection with the 'structural framework' block 41e8, the 'structural framework' block 41e8 describes the 'overall shape' of the reservoir. One example of 'overall shape' of a reservoir is whether or not the reservoir is 'faulted'? The 'structural framework' block 41e8 (and in particular, the structural top and the structural base portion of the 'structural framework') responds to a 'plurality of inputs' which define a general framework for the reservoir, and these 'plurality of inputs' consist of: the 'geomechanical analysis' block 41e7, the 'geophysical interpretations' block 41e6, and the 'stratigraphic correlations' block 41e5. In connection with the 'well and interval property summaries' block 41e9, 'information relating to a set of more detailed reservoir properties' within the 'structural framework' of block 41e8 is developed from the petrophysical analysis at individual wellbores ('final petrophysical model' block 41e3) and the geologic correlations ('detailed stratigraphic correlations' block 41e5) that come from stratigraphy and sedimentology ('sedimentologic & stratigraphic analyses' block 41e4) and wellbore profiles. The aforementioned 'information relating to the set of more detailed reservoir properties' will be provided as an input to the 'well and interval property summaries' block 41e9. In addition, the 'seismic attribute analysis' block 41e10 will also provide an input to the 'well and interval property summaries' block 41e9. The 'seismic attribute analysis' block 41e10 provides

seismic information which enables one to relate a seismic response (originating from portions of the reservoir which are located between the wellbores) to a set of measured properties from a plurality well logs (obtained from measurements in the wellbore itself). This establishes a guide on how to distribute reservoir

5 properties at locations between wellbores where well data does not exist. The 'well and interval property summaries' block 41e9 and the 'seismic attribute analyses' block 41e10 and the 'structural framework' block 41e8 all come together as inputs to the 'reservoir structure and property model' block 41e11. Having defined all those properties in three dimensional space (position, void

10 volume or porosity), such properties can be used to compute, from a geologic standpoint, an estimate of the fluids in place in the reservoir. This calculation, which is called a 'volumetric calculation' and which is performed in the 'reservoir volume calculations' block 41e12 of figure 10, is input from the 'reservoir volume calculations' block 41e12 to the 'volumes consistent' block 41e13.

15 Another line 41e14 from 'preliminary engineering' 41d is also input to the 'volume consistent' block 41e13. In the 'volumes consistent' block 41e13, the aforementioned 'volumetric calculation' is subject to a consistency check by comparing the 'volumetric calculation' with the 'material balance' from 'preliminary engineering' 41d. In the consistency check, if the volumes are

20 consistent, the geoscience interpretation of that which is underground in the reservoir agrees with your interpretation of the reservoir from a performance standpoint and, as a result, you can now proceed to develop a system of production forecasting. If they are not consistent, an adjustment in one case or the other must be made, in the 'adjustments evident' block 41e15. That is, the

25 geologic interpretations may be adjusted to achieve a better agreement. If you cannot make any adjustments, the uncertainties are identified as being unresolved at this point, in the 'uncertainties in sensitivity/risk analysis' block 41e16. Those uncertainties can be dealt with in a sensitivity study in the forecasting model, or in a risk analysis during the economics.

II. Generate Initial Reservoir Development Plan, block 42 in figures 4 and 7

A. Numerical Model Studies, block 42a

5 Referring to figures 11A and 11B, a detailed construction of the 'Numerical Model Studies' block 42a of figure 7 is illustrated. The detailed construction of the 'Numerical Model Studies' block 42a of figure 7, as shown in figures 11A and 11B, is new and novel and that detailed construction shown in figures 11A and 11B sets forth a sixth new and novel feature of the present invention.

10

In figures 11A and 11B, after doing the preliminary engineering and the reservoir description from the geologic standpoint, we enter the 'numerical forecasting model' decision triangle 70 to decide whether to do either numerical studies 42a or analytical studies 42b. During this part of the process, either the 'numerical

15 model studies' 42a or the 'analytical model studies' 42b of figure 7 will be performed. Focusing initially on the 'numerical model studies' of block 42a in figure 11A/11B, a numerical model study would take place in connection with a complex reservoir with a lot of data to manage and the reservoir has significant untapped potential or opportunities. The numerical model study 42a will help
20 identify the specific potentials or opportunities associated with that reservoir.

Assume that the decision which is output from the 'numerical forecasting model' of block 70 is a 'yes'. Having decided to do a numerical model study, one input is the 'digital 3D structure and property model' block 42a1 which comes out of the geologic studies and which provides a good first estimate of what the reservoir
25 looks like. In order to model the reservoir numerically, a 'building block' model must be built to handle the flow characteristics. This is accomplished by building a horizontal grid and a layering mechanism that is superimposed on the three dimensional structure and property distributions. Structural positioning and reservoir properties are interpreted for each of the grid blocks of the horizontal
30 grid. Therefore, the combination of the '3D Simulator Grid System' block 42a2 (which is the grid system you designed) and the 'digital 3D structure and property

model' block 42a1 (which is the property distribution) defines the rock model in a reservoir simulator represented by the 'initial 3D reservoir simulator' block 42a3. In addition, when the 'fluid property and saturation models' block 42a4 is provided as an input to the reservoir simulator of block 42a3, a 'saturation distribution' is superimposed in that rock model in the reservoir simulator. The 'saturation distribution' determines where there is oil, water and gas in the reservoir, it determines the properties for these fluids, and it determines the way in which these fluids move in the reservoir when subjected to a pressure differential. In addition, outside influences must be defined in connection with the 'initial reservoir conditions and aquifer model' block 42a5. That is, the oil or gas accumulation might be in communication with a larger aquifer system and the interpretation of the extent of that aquifer comes from the regional work done in the geologic modeling. In addition, aquifer size can also be investigated in connection with the material balance calculations (block 41d9) of the 'preliminary engineering' (of figures 9A/9B). Therefore, preliminary estimates of the extent or size of that aquifer from block 42a5 of figures 11A/11B (and from block 41d9 of figures 9A/9B) are provided as an input to the 'initial 3D reservoir simulator' block 42a3. Having created the initial reservoir model in the 'initial 3D reservoir simulator' block 42a3, the next step is to check, in the 'volumes consistent' block 42a6 of figure 11A, whether the volumes contained in that model are consistent with 'other information' you have determined. That 'other information' includes the volumes that you have calculated from the geologic description in connection with the 'reservoir volume calculations' block 41e12 of figure 10A/10B. That 'other information' also includes the material balance estimates that have been calculated in connection with the 'material balance volume & aquifer interpretations' block 41d9 of figure 9A/9B. Therefore, the comparison taking place in the 'volumes consistent' decision triangle 42a6 determines whether the grid system you have superimposed on the 3D rock model is a reliable representation of the property description developed by the geologic work. In addition, in connection with the 'volumes consistent' decision triangle 42a6, there must be consistency in the initial volumes. If they are consistent, the 'corrected

volume model' block 42a7 indicates a corrected volume model (see more about this below). If they are not consistent, the grid system fails to reproduce the geologic description. In that case, in the 'model property adjustments' block 42a8, the grid can be manually adjusted to ensure that there is a proper

- 5 representation between the grid system in the reservoir simulator and the geologic description, as indicated by the feedback loop line 42a9 in figure 11A extending between block 42a8 and block 42a3 (the reservoir simulator). Having made these adjustments as necessary in block 42a8, drop down to the 'uncertainties in sensitivity and risk analysis' block 42a10 which identifies any uncertainties that
- 10 are remaining. If reasons cannot be identified or determined why there is some remaining disagreement or uncertainty between the various volume calculations, you would identify that uncertainty, try to bracket it, and deal with it later in a sensitivity or risk analysis approach. In any event, referring to the 'volumes consistent' triangle 42a6, if you have consistent volumes, move to the 'corrected volume model' block 42a7. At this point, in connection with the 'historical production/injection rate constraints' block 42a11, you need to add the following 'constraints' to the 'corrected volume model': (1) historical well data to enable you to run the model through a historical production period, (2) well positioning, (3) well trajectories, (4) where the wells have been completed over time, and (5)
- 15 the history of well production and injection. When these 'constraints' have been added to the 'corrected volume model' 42a7, the method steps set forth in the 'model response to historic rate constraints' block 42a12 are practiced. In this 'model response...' block 42a12, the method steps being practiced in this block 42a12 includes: running the model through the historic period, and obtaining a set
- 20 of model responses to the production and injection stimuli that you are then able to compare to the actual measured performance. Having run the model through history and saved information pertaining to how the wells respond, refer now to the 'model reproduces history' decision triangle 42a13. In this decision triangle 42a13, you are comparing model performance to historical data. If you did not
- 25 have a reliable representation of the measured performance, make some adjustments to the model properties in the 'model property adjustments' block
- 30

42a14. Having made those adjustments to the model properties, loop back via line 42a15 to the 'model response to historic rate constraints' block 42a12 and re-run the model through the historic period. This 'iterative process' (of running through history, comparing to measured data, and adjusting the model properties) continues until you have what you feel is a satisfactory representation of how the reservoir has actually performed. At that point, since you have now produced a 'history calibrated model', branch off from the 'model reproduces history' decision triangle 42a13 to the 'history calibrated model' block 42a16. In addition, while performing the above referenced 'iterative process' of running through history, comparing to measured data, and adjusting the model properties (hereinafter, the 'adjustments'), keep track of those 'adjustments' in the 'uncertainties in sensitivity and risk analysis' block 42a10. In addition, save the 'adjustments' therein for future sensitivity analyses either during the forecasting phase or later on when running a production forecast. Having reached the 'history calibrated model' stage in block 42a16 and having identified 'various uncertainties' that you are still unable to resolve or reconcile in block 42a10, both the 'history calibrated model' and the 'various uncertainties' are provided as inputs to the 'production and reserves forecast' block 42c.

B. Analytical Model Studies, block 42b

Referring to figures 12A and 12B, a detailed construction of the 'Analytical Model Studies' block 42b of figure 7 is illustrated. The detailed construction of the 'Analytical Model Studies' block 42b of figure 7, as shown in figures 12A and 12B, is new and novel and that detailed construction shown in figures 12A and 12B sets forth a seventh new and novel feature of the present invention.

In figures 12A and 12B, during this phase, either the 'numerical model studies' 42a or the 'analytical model studies' 42b will be performed. Assume that the output from the 'numerical forecasting model' decision triangle 70 is a 'no', in which case, we will now perform an analytical model study, block 42b in figures

12A and 12B. In figures 12A and 12B, therefore, we will now utilize an analytical approach for the purpose of forecasting a well's production, as opposed to modeling the well for the purpose of forecasting the well production.

Therefore, one input to the 'analytical model study' block 42b in figure 12A/12B,

5 where a large part of your reliance exists, includes the 'analogous reservoir performance' block 42b1. When performing analytical model studies, you believe that the information available to you about your specific reservoir might not be reliable enough to describe a full reservoir simulator. Therefore, while using the data you have regarding a specific reservoir, you try to employ the

10 trends that are available with regard to an analogous reservoir system to guide a forecast for the wells in your specific reservoir. That is, you can normalize the observations obtained from an analogous reservoir field and use that as a guide to help generate a forecast from your starting point in your specific reservoir field. Another input to the 'analytical model study' block 42b in figure 12A/12B, where

15 a large part of your reliance exists, include the 'well drilling and completion histories' block 42b2 of the wells. Still another input that is provided to the 'analytical model study' block 42b includes the 'historic well performance trends' of block 42b3. Here, you have the same measured historic well performance (i.e., production rates and pressure levels). Still another input that is provided to the

20 'analytical model study' block 42b includes the 'reservoir property and structure maps' of block 42b4 that you generate from the 3D geologic model. Still another such input includes the 'material balance volumes and aquifer model' of block 42b5 which include your material balance calculations and estimates for aquifer strength or to calibrate the initial volumes in place. Starting with the 'historic

25 well performance trends' of block 42b3 and referring to the 'well production decline characteristics' block 42b6, from plots or graphs of the 'production trends', you can establish the decline characteristics or the productivity characteristics of the field. In a number of cases, your wells will fit any number of well production decline trends that are recognized in the literature for

30 forecasting future production trends and recovery from the wells. From the 'historic well performance trends' of block 42b3, you can also map, in the 'map

displays of well performance indicators' block 42b7, several performance indicators such as peak well rates or the total volumes of fluids produced from different well sites in order to examine which areas of a reservoir field are better or worse than average or better or worse than their companions. When you map those performance indicators in block 42b7, you can compare, in the 'conformance' decision triangle of block 42b8, that map of the performance indicators of block 42b7 with the geologic interpretation set forth in the 'reservoir property and structure maps' block 42b4 for the purpose of locating and observing any disagreement. For example, you may have some wells that show very good performance, lie in a very good part of the reservoir, and are consistent with the geologic interpretation; however, at the same time, the well behavior of one or more of those wells have, in fact, not been very good. Those wells therefore must be analyzed in detail to determine what went wrong, for example, during the drilling or the completion phase, etc. However, when the 'no' output of the conformance block 42b8 is set and there is no total conformance, the comparison, in the 'conformance' block 42b8, of production quality (from the 'map displays of well performance indicators' block 42b7) with the geologic interpretation (from the 'reservoir property and structure maps' of block 42b4) is intended to identify any 'potential infill well opportunities' of block 42b9 (or actions to be taken at individual wells as set forth in the 'workover and artificial lift candidates' block 42b10). The 'potential infill well opportunities' block 42b9 reflects any opportunities you have to drill some infill wells. However, if there is total conformance and the output of the 'conformance' block 42b8 is 'yes', drop down to the 'volumetric and material balance fluids in place estimates' block 42b11. In this block 42b11, it is necessary to determine how the well performance trends balance out with your estimates of fluids in place and pressure support from the material balance calculations. Referring to the 'well production decline characteristics' block 42b6, this block 42b6 is trying to forecast, by recognized analytical methods, future performance trends that you might expect from existing wells. The well production and decline characteristics, along with the way you drilled and completed the wells, are input to the 'workover and artificial lift

‘conformance’ triangle 42b16), where there are disagreements in particular areas of the field, it might be a result of an inability by analytical methods to properly account for interference effects between wells. Therefore, in connection with the ‘uncertainties in sensitivity and risk analysis’ block 42b17, these are the types of

5 uncertainties that exist when you check if you have conformance via block 42b16. Having established the conformance (the ‘yes’ output from block 42b16) and the remaining uncertainties (block 42b17), we are now ready to do the ‘production and reserves forecasting’ block 42c of figure 7 and figures 13A and 13B.

095994.09400

C. Production and Reserves forecast, block 42c

Referring to figures 13A and 13B, a detailed construction of the ‘Production and
5 Reserves Forecast’ block 42c of figure 7 is illustrated. The detailed construction
of the ‘Production and Reserves Forecast’ block 42c of figure 7, as shown in
figures 13A and 13B, is new and novel and that detailed construction shown in
figures 13A and 13B sets forth an eighth new and novel feature of the present
invention.

10 In figures 13A and 13B, on the left hand side, there is illustrated a process for
generating ‘production and reserves forecasts’ in response to the ‘numerical
model studies’ 42a. The ‘numerical model studies’ block 42a provides an input
to the ‘history calibrated model’ 42c1. The ‘history calibrated model’ 42c1, in
15 turn, provides an input to the ‘simulator production and reserves forecast’ block
42c2, which is the actual simulation tool. That is, the ‘simulator...’ block 42c2
will represent the well responses and the field responses to the various actions that
are taken in the field (hereinafter, the “model”). We cannot specify a desired oil
rate in the future. Therefore, it is necessary to set up an overlapping system of
20 constraints on the well and reservoir that represent the conditions that exist out in
the field. Then, allow the model to proceed and forecast, by itself, the following:
when you impose these conditions, these are the kinds of oil and/or gas rates you
will achieve. Therefore, there are a plurality of ‘constraints’ that are supplied to
the model, and those constraints are shown and represented in figures 13A and
25 13B by the following blocks: the ‘production objectives’ block 42c3, the ‘sales &
transport constraints’ block 42c4, the ‘rig & equipment availability’ block 42c5,
the ‘injectant constraints’ block 42c6, the ‘processing constraints’ block 42c7, the
‘well capacity constraints’ block 42c8, and the ‘proposed plan of development’
block 42c9. The ‘production objectives’ block 42c3 represents the target rates
30 for the reservoir field or that which you are trying to achieve or the desire to
maintain a production plateau for some period of time during the reservoir life.

The 'processing constraints' block 42c7 represent the facilities that exist on the surface at that time which, for example, can only process a particular volume of water per day. When the model gets to the point where it wants to exceed that particular volume of water production in a given day, in order to meet the target

5 oil production rate, the 'processing constraint' 42c7 will be initiated. This will result in a decline in the oil rate which is required in order to avoid exceeding the particular volume of water production per day. The 'well capacity constraints' block 42c8 are controlled by the following parameters: the surface delivery pressure that you need to meet, the reservoir pressure in the system, and the flow

10 capacity of the existing completion. Each of these parameters are all provided to the model (the 'simulator production and reserves forecast' block 42c2). As a result, when the model knows a top hole or bottom hole pressure against which it must deliver, the model would then know the reservoir properties, and it can determine how much fluid it can deliver. The 'sales & transport constraints' block

15 42c4, which should be imposed over some portion of the field, include some sort of restriction that is related to existing pipelines and which can be changed for different forecasts. For example, if we were to increase the diameter of the pipe and demanded 500K barrels/day instead of 300K barrels of day, what would be the difference in the long term? In connection with the 'rig & equipment

20 availability' block 42c5, we may be developing a field with a lot more wells and yet we will be drilling the wells in an effort to maintain the production target rate. The speed at which you can drill and complete the wells is related to the amount of equipment available. For example, if two rigs are taken from an adjacent field and made available to this field, how does that effect our ability to maintain an oil

25 production target? In the 'injectant constraints' block 42c6, you may be in a position where you must maintain pressure in a field in order to maintain its deliverability and yet you have only a limited supply of injectant. Therefore, it is necessary to recognize these limitations for supplying the injectant in your production forecasts as well. In the 'proposed plan of development' block 42c9,

30 this block relates to the scheduling of activities. Here, it is necessary to reflect, for the model, the actual implementation time as opposed to an implementation

time which starts from a fictitious point. Therefore, all of these constraints (blocks 42c3, 42c4, 42c5, 42c6, 42c7, 42c8, and 42c9) feed into the 'simulator production and reserves forecast' block 42c2 as a mechanism for generating the production forecast. Using the 'simulator...' of block 42c2, you would then run

5 the model and obtain a forecast (i.e., your results) of the way the whole reservoir responds to your development plan. Those results are examined. In connection with the 'mechanism optimization' block or decision triangle 42c10, for the 'mechanism' that you have chosen (where the word 'mechanism' is defined as the process that is active in the reservoir, such as whether water or gas is being

10 injected into the reservoir), is there a way to optimize the way the mechanism is implemented? For example, when doing water flood or injection, is there a different set of injection sites to examine? From the 'mechanism optimization' triangle 42c10, if there are other cases which you believe should be examined, go to the 'constraint/plan adjustments' block 42c11, make changes to your

15 implementation plan or the constraints, and then go back to the 'simulator...' block 42c2 and re-run another forecast. Now, you may have a water flood forecast number two. Continue to implement the loop from blocks 42c10, 42c11, 42c2, and 42c10 until you feel that you have reached the point where you have examined all reasonable alternatives for that particular mechanism. At that point,

20 take the 'no' output from the 'mechanism optimization' block 42c10 and drop down to the 'alternate mechanism' block or decision triangle 42c12. The question now is: we have looked at all the water flood opportunities, is there something different that can be done in the field? For example, can we inject gas as an alternative? This would be a different 'mechanism'. Having identified a

25 different mechanism, take the 'yes' output from the 'alternate mechanism' decision triangle 42c12 and go back to the 'proposed plan of development' block 42c9. Here, revise the implementation plan for your new development, and then drop back down to the 'simulator production and reserves forecast' block 42c2, re-run the simulator for that new mechanism and then proceed with the same

30 above referenced checks. From the results that you are getting from the reservoir response to that implementation plan, in the 'mechanism optimization'

arrive at a field forecast. In the analytical model studies case in figure 13, with respect to blocks 42c19, 42c20, 42c21, 42c22, and 42c23, you can examine different production mechanisms, different ways of implementing them, different schedules of implementing them, and you can also address the uncertainties by running sensitivity type forecasts as well. Again, the results would flow into the 'facilities requirements' block 42e representing an analysis of what you need from the standpoint of surface processing or shipping facilities.

D. Facilities Requirements, block 42e

Referring to figures 14A and 14B, a detailed construction of the 'Facilities Requirements' block 42e of figure 7 is illustrated. The detailed construction of the 'Facilities Requirements' block 42e of figure 7, as shown in figures 14A and 14B, is new and novel and that detailed construction shown in figures 14A and 14B sets forth a ninth new and novel feature of the present invention.

In figures 14A and 14B, from the 'production and reserves forecast' block 42c, a schedule of rates of production and injection is generated that have been forecast for the next twenty years (for example) on an annual or a 6-monthly basis. Those forecasts have been generated based on a set of constraints on facilities. Here, we must estimate the facilities that must be required for a depletion mechanism or an optimization case. The basic inputs that come from the 'production and reserves forecast' block 42c are the 'reservoir fluids production rates & pressures' block 42e1 (i.e., the 'production side') and the 'total fluids injection rates & pressures' block 42e2 (i.e., the 'injection side'). At this point, consider first the 'production side'. On the 'production side', the 'optimized separator conditions' block 42e3 include the conditions that are in effect for the existing separation equipment. In the 'more capacity needed' decision triangle block 42e4, this block represents a first check on whether your separator conditions from block 42e3 and the production rates that you project from block 42e1 are consistent. That is, in block 42e4, do you have sufficient capacity currently to handle the forecast of

production rates (i.e., do you need more capacity)? If you do need more capacity, take the 'yes' output from the decision triangle block 42e4 which leads to the 'revised separator train configuration' block 42e5. In this block 42e5, the configuration of the existing separator facilities is examined and either a new

5 train is added or one of the existing trains is replaced (and estimate capital costs associated therewith). A second check is now implemented in the 'new components in train' decision triangle block 42e6. For example, the reservoir field facility may not now include any water handling facilities; therefore, the question now is 'are you going to install those water handling facilities'? If yes,

10 take the 'yes' output from the decision triangle block 42e6 which leads to the 'component tie-ins to current train' block 42e7. If you need to add-in those components, where do they fit in the design stream and estimate the costs associated therewith. A third check is now implemented in the 'by-product disposal needed' decision triangle block 42e8. In this decision triangle block

15 42e8, do you need any additional by-product disposal? If yes, take the 'yes' output from decision triangle block 42e8 which leads us to the 'by-product disposal facility' block 42e9. In block 42e9, if, for example, you do produce substantial amounts of water, what are you going to do with all that water? High pressure pumps may be required to inject the water underground. Do you need to

20 install the facilities to handle the by-products? A fourth check is now implemented in the 'more tankage needed' decision triangle block 42e10. In this decision triangle block 42e10, if you increase the production rates from the field, you may need to increase the tankage on the main product (if its oil), or, if your by-product is water, you may need extra tankage for the water. Therefore, if more

25 tankage is needed, take the 'yes' output from the decision triangle block 42e10 which leads us to the 'additional tank capacity and tie-in' block 42e11. A fifth check is now implemented in the 'pumps or compression needed' decision triangle block 42e12. If pumps or compression is needed, take the 'yes' output from the decision triangle block 42e12 which leads us to the 'total HP and staging requirements' block 42e13. In blocks 42e12 and 42e13, if you are going to switch

30 to a concurrent oil and gas sales program at some point in the future, and having

identified a market for gas, are you going to need to compress the gas in order to get the compressed gas to the sales terminal? What is your existing compressor capacity? You may need to add more compression. If the compression ratio is very high, will you need to stage the compressors? Each of the above referenced

5 changes to the existing facilities, in connection with blocks 42e4, 42e6, 42e8, 42e10, and 42e12, carries with it a capital cost and possibly incremental operating costs (hereinafter, 'factors') and these 'factors' flow down into the 'economic and risk analysis' block 42f. At this point, consider now the 'injection side'. On the 'injection side', there exists a similar series of checks. A first check is the

10 'recycled volumes adequate' decision triangle block 42e14. If the recycled volumes are not adequate, take the 'no' output from the decision triangle block 42e14 which leads us to the 'external supply capacity and condition' block 42e15. In blocks 42e14 and 42e15, if you have proposed a scheme where you are injecting produced gas, and you have made the assumption that you are going to

15 inject a specific volume of injectant (e.g. fluids or a gas) to maintain reservoir pressure in order to support your expected oil production target rates, is the volume of gas that you will be producing from the field sufficient to make-up your injection requirements, or do you need to look for an external supply of such injectant? Do you need to buy the injectant (e.g. gas) from a neighboring

20 pipeline. The injectant can be gas or it might be water or any other injectant. Do you have sufficient resources on your own or do you need to purchase the resources (i.e., the injectant) from an external supplier? If you do need to purchase the resources from an external supplier, as noted in the 'external supply capacity and condition' block 42e15, refer to the 'chemical compatibility'

25 decision triangle block 42e16. In this block 42e16, do you have compatibility of the injectant (such as water) with the system that you are running (e.g., in water injection programs, do you have water compatibility between your reservoir and the alternate source)? If there is no compatibility, take the 'no' output from the decision triangle 42e16 which leads us to the 'processing or treatment facility'

30 block 42e17. In block 42e17, in addition to installing production handling facilities, do you need to also install a processing plant for your injectant fluids?

A second check is the 'adequate treatment capacity' decision triangle block 42e18. With respect to block 42e18, if your forecast shows that you do have sufficient volumes from your own site, do you have sufficient capacity to handle those volumes? For example, if in the future the gas rates will be ten times what they are today, you can inject a gas today at today's gas rates but, in the future, do you have the ability to inject at ten times that rate? If, in block 42e18, you do not have sufficient capacity, take the 'no' output from block 42e18 which leads us to the 'injectant treating expansion' block 42e19. In block 42e19, an expansion to the injectant treatment is required. A third check is the 'injectant composition constant' decision triangle block 42e20. With respect to block 42e20, are you making any changes to your injection stream? For example, your mechanism that you are using might include carbon dioxide in substantial fractions. Since carbon dioxide is corrosive, does that impose certain requirements on the metallurgy of the equipment that you have to handle the carbon dioxide? Do you need to change the equipment metallurgy to stainless steel, or do you need to use plastic liners in the separation vessels? Those changes to the equipment metallurgy will be dealt with in the 'vessel and metallurgy requirements' block 42e21. A fourth check is the 'injection pressure adequate' decision triangle block 42e22. In block 42e22, do you have adequate injection capacity? In connection with this injection system, if you have a situation where the reservoir has been depleted and you are trying to install a new facility and repressure the reservoir, what sort of capacity for the injection pressure is required here. In the 'total HP and staging requirements' block 42e23 and in the 'supplemental power requirements' block , what sort of staging of the compression is required and what are the pumping requirements and what is the impact of that compression and pumping requirement on your local power supply? For example, the installation of high volume downhole pumps may require power that is not required by the rest of the installation. Therefore, if you choose to install those types of pumps, you must buy and install the pumps and you must also provide for the electricity requirements in order to meet the driver needs. Each of the above referenced changes to the existing facilities, in connection with blocks 42e14, 42e18, 42e20,

and 42e22, carries with it a capital cost and possibly incremental operating costs (hereinafter, 'additional factors') and these 'additional factors' flow down into the 'economic and risk analysis' block 42f.

5 E. Environmental Considerations, block 42d

Referring to figure 15A and 15B, a detailed construction of the 'Environmental Considerations' block 42d of figure 7 is illustrated. The detailed construction of the 'Environmental Considerations' block 42d of figure 7, as shown in figures
10 15A and 15B, is new and novel and that detailed construction shown in figures 15A and 15B sets forth a tenth new and novel feature of the present invention.

In figures 15A and 15B, the term 'environmental considerations' includes air and water quality considerations, but it also includes the business environment and the
15 geographical environment. These are issues which will arise depending on: where the reservoir field is located, whether it is on-shore or off-shore, what kind of government is in place, and the impact these issues have on planning, economic provisions, and the risk that must be considered when deciding to implement a particular field development plan. These are issues that will be considered
20 separately from main stream technical evaluations. Therefore, the 'environmental considerations' must be taken into account when doing risk analysis and economic appraisals. In figures 15A and 15B, four broader categories of 'environmental considerations' have been identified: the 'special emergency response plans and provisions' block 42d1, the 'pre-construction
25 environmental impact study requirements' block 42d2, the 'interrupted or restricted access to wells/facilities' block 42d3, and the 'government or regulatory approval and audit provisions' block 42d4. In the 'special emergency response plans and provisions' block 42d1, there are several issues which need to be considered. For example, one issue relates to the 'containment of produced fluid
30 chemical spills' block 42d5. In connection with block 42d5, in an 'on-land' type of installation, most producing sites would be required to be surrounded by

remediations do you have to make to the pipeline in order to comply with government restrictions and regulations? In the 'by-product disposal requirements' block 42d12, the production of oil containing sour gas streams produces a large amount of hydrogen sulfide in the gas. Processing plants will have several trains that will reduce the hydrogen sulfide to elemental sulfur, but the elemental sulfur can create a huge storage burden on the operator. Yet, there are only limited applications for sulfur outside the industry. Care must be taken to prevent the elemental sulfur from being reduced to powder form and distributed by wind across the country. Therefore, there must be a natural way to store the sulfur in the open without being adversely affected by wind/rain, etc. In the 'interrupted or restricted access to wells/facilities' block 42d3, several additional issues need to be considered related to interrupted or restricted access to wells and facilities. In the 'special hostile environment measures' block 42d13, some fields are flooded during part of the year and are not accessible except by boat or barge. For other fields, during the spring, certain roads are in poor condition to support the transportation of heavy equipment in order to get access to the well site. In the 'emergency access provisions' block 42d14, if something were to go wrong, what provisions must you make in order to get access to a remote well site? For example, off shore platforms are often remotely operated by electronically actuated valves and control mechanisms. If the valves fail to operate, what provisions have been taken in order to get access to that failed valve? In the 'remote monitoring and control facility' block 42d15, this block is closely related to block 42d14, but each block 42d14 and 42d15 have a separate slightly different contribution to the costs which need to be accounted for when doing the 'economics and risk analysis' of block 42f. In the 'government or regulatory approval and audit provisions' block 42d4, several additional issues here need to be considered. Governmental regulations do have an impact on the implementation of a field development plan because it does take time to get those governmental approvals. For example, in the 'impact on implementation scheduling' block 42d16, if you undertake a study that may take a year to complete which results in a field development plan, and when you give that field

development plan to the government for approval, how long does it take to get all the approvals? It is not uncommon to take 2 to 5 years to get approval for a specific plan. These factors have an impact on the economics as well because, for every year the project is delayed, the projected cash flows and expected capital investments in implementing the development plan are also affected.

Therefore, in figures 15A and 15B, all of the factors discussed above, which are identified in blocks 42d1 through 42d16 of figures 15A and 15B, need to be considered in the 'economics and risk analysis' block 42f of figures 16A and 16B (discussed in detail below).

F. Economics & Risk Analysis, block 42f

Referring to figures 16A and 16B, a detailed construction of the 'Economics & Risk Analysis' block 42f of figure 7 is illustrated. The detailed construction of the 'Economics & Risk Analysis' block 42f of figure 7, as shown in figures 16A and 16B, is new and novel and that detailed construction shown in figures 16A and 16B sets forth an eleventh new and novel feature of the present invention.

In figures 16A and 16B, the general approach taken in the 'economics & risk analysis' block 42f is to try to evaluate, for each of the alternative depletion plans that you think have merit, the economics of each plan. Then, it is necessary to incorporate, into your evaluation of said economics, any sensitivity work that has been done on any, as yet, poorly defined reservoir parameters. It is also necessary to identify provisions which pertain to the risks associated with each plan. In the 'reservoir development plan' block 42f1, this block 42f1 provides the following: a produced fluids or production schedule in the 'reservoir production schedule' block 42f2, an injected fluids schedule in the 'reservoir injection schedule' block 42f3, and a schedule of the facility requirements (e.g., the wells, either interventions or new wells) in the 'facility and well schedule' block 42f4. From the production schedule in block 42f2 and the injection schedule in block 42f3

accounting for the 'environmental risk factors', as set forth in the 'environmental risk factors' block 42f15. In the 'alternative development plan' decision triangle block 42f17, you may have to decide to evaluate economically an alternative development plan. If there are alternative development plans, as indicated in the

5 'revised development implementation' block 42f18, it is necessary to loop back to the input of the 'reservoir development plan' block 42f1, which represents the beginning of this process, and repeating the economic profile generation for the new development/depletion plan while taking into account its attendant risks and uncertainties. The alternative development plans will have its own production

10 and injection schedules, the facilities and wellbores that are necessary, the capital and operating costs provisions, and some changes to the special project costs. When you have dealt with all the alternative development plans, take the 'no' output from the 'alternative development plan' decision triangle block 42f17 and refer to the 'comparison of risk balanced alternate plan economic profiles' block

15 42f19. Here, in block 42f19, you will compare the various alternative development plan economic profiles, and, responsive to that comparison of economic profiles, you will assess the risk which is associated with each of the various economic profiles. For example, assume that two alternative development plans exist. Assume that a first alternative development plan has on

20 its up side additional profit potential but on its down side it has more risk. Assume further that a second alternative development plan has a lower level of risk and a lower level of risk-costs but it also produces a lower annual revenue stream. A relatively senior level management decision is required in order to decide whether the first alternative development plan or the second alternative

25 development plan should be selected. Generally, however, the alternative development plans will fall together and there will be a reasonable comparison and it will be fairly obvious which alternative development plan is the 'appropriate development plan' to adopt. The 'appropriate development plan' to adopt will be the 'optimized development plan' of block 42g. The 'optimized

30 development plan' will be the one for the conditions and the information that are

available to you at the time. This is not necessarily the optimized development plan for all time.

G. Optimized Development Plan, block 42g

5

In figures 4 and 16A/16B, the 'appropriate development plan' is the 'optimized development plan' of block 42g in figure 16B. The 'optimized development plan' of block 42g in figure 16B represents the 'reservoir development plan' of block 42 in figure 4. In figure 4, having made the selection of the 'appropriate development plan' as the 'reservoir development plan' of block 42, you now start the 'incrementally advance capital program' block 43 in figure 4. Now, you start spending money in the reservoir field in response to and in accordance with the selected 'appropriate development plan'/'reservoir development plan' 42. In figure 4, you then monitor and operate in the 'operate/monitor' block 44 while gathering the 'high rate monitor data' of block 62. Having collected the new data, via block 44, implement the 'data assimilation and updating' block 45 in figure 4. After a period of time, the additional information might prove that your interpretations of the reservoir fell short and that your 'optimized development plan' 42g, based on that previous description, needs to change. In figure 4, in that case, it would be necessary to cycle back from the output of block 45 (data assimilation and updating) to the input of block 41 (initial reservoir characterization). At this point, new data is collected and a new development plan is generated. However, a new development plan is not generated more often than several years apart because: (1) large capital investment requirements are needed each time a new development plan is generated, and (2) the true behavior of the reservoir cannot be observed until the reservoir has been given enough time to reach a 'semi-steady-state' condition. By responding too quickly to adjust the development plan, you have not seen everything; that is, you have not observed enough data to warrant changing the development plan. For a reservoir life of 25 to 30 years, you might have 3 or 4 shifts in the basic development plan.

References

The following references are incorporated by reference into the specification of this application:

5

1. Anderson, R. et al., Method for Identifying Subsurface Fluid Migration and Drainage Pathways In and Among Oil and Gas Reservoirs using 3-D and 4-D Seismic Imaging, US Patent 5,586,082, Dec. 17, 1996.

10

2. Baker, A., et. al., Permanent Monitoring – Looking at Lifetime Reservoir Dynamics, Schlumberger Oilfield Review, Winter 1995, pp. 32-46.

15

3. Babour, K., A. Belani and J. Pilla, Method and Apparatus for Surveying and Monitoring a Reservoir Penetrated by a Well Including Fixing Electrodes Hydraulically Isolated Within a Well, US Patent 5,642,051, June 24, 1997.

20

4. Babour, K., A. Belani and J. Pilla, Methods and apparatus for long term monitoring of reservoirs, US Patent 5,467,823, Nov. 21 1995.

25

5. Beamer, A., et. al., From Pore to Pipeline, Field-Scale Solutions, Schlumberger Oilfield Review, Summer 1998, pp. 2-19.

30

6. Beckner, B.L. and X. Song, Field Development Planning Using Simulated Annealing – Optimal Economic Well Scheduling and Placement, Proc. Annual SPE Tech. Conf., Dallas, 22-25 Oct. 1995, pp 209-221, SPE-30650.

7. Bittencourt, A.C. Reservoir Development and Design Optimization, Proc. Annual SPE Tech. Conf., San Antonio, 5-8 Oct. 1997, pp 545-558, SPE-38895.

8. Briggs, P., et. al., Trends in Reservoir Management”, Schlumberger Oilfield
Review January 1992, pp. 8-24.
9. Bussear, T., and B. Weightman, Computer Controlled Downhole Tools for
5 Production Well Control, US Patent 5,803,167, Sep. 8, 1998.
10. Currie, J.C., J.F. Novonak, B.T. Aasboee and C.J. Kennedy, Optimized
Reservoir Management Using Mixed Linear Programming, Proc. SPE
Hydrocarbon Econ. & Evaluation Symp., Dallas, 16-18 March 1997, pp 235-
10 241, SPE-37963.
11. Gawith, D.E. and P.A. Gutteridge, Decision-Directed Reservoir Modelling:
The Next Big Thing”, Proc SPE Reservoir Simulation Symposium, 14-17 Feb.
199, Houston, TX, pp. 131-134, SPE-51890.
12. Guerillot, D. and F. Roggero, Method for Predicting, by Means of an
Inversion Technique, the Evolution of the Production of an Underground
Reservoir, US Patent 5,764,515, Jun 9, 1998.
13. He, W., and R. Anderson, Method for Inverting Reflection Trace Data From
20 3-D and 4-D Seismic Surveys and Identifying Subsurface Fluid and Pathways
In and Among Hydrocarbon Reservoirs Based on Impedance Models, US
Patent 5,798,982, Aug. 25, 1998.
14. Johnson, M., Method and apparatus for testing, completion and/or maintaining
25 wellbores using a sensor device, US Patent 5,829,520, Nov 3, 1998.
15. Pedersen, L. et. al., Seismic Snapshots for Reservoir Monitoring,
Schlumberger Oilfield Review, Winter 1996, pp. 32-43.

30

16. Ramakrishnan, T. S. and Kuchuk, F., Testing and Interpretation of Injection Wells Using Rate and Pressure Data, *SPE Form. Eval.* **9**, pp. **228-236** (1994))

17. Satter, A. and G. Thakur, Integrated Petroleum Reservoir Management, A Team Approach, PennWell Publishing Co., 1994, 335 pages.

18. Trayner, P.M., Defining Business Critical Workflows for Integrated Reservoir Optimization, SPE India Oil and Gas Conference Exhibition, New Delhi, India, 17-19 Feb 1998, SPE-39576.

19. Tubel, P. et. al., Method and Apparatus for the Remote Control and Monitoring of Production Wells, US Patent 5,975,204, Nov 2, 1999.

20. Tubel, P. et al., Production Wells Having Permanent Downhole Formation Evaluation Sensors, US Patent 5,730,219, Mar. 24, 1998.

21. Stein, M. and F. Carlson, Method for Characterizing Subterranean Reservoirs, US Patent 5,305,209, Apr. 19, 1994.

22. Wason, C. et al., System for Monitoring the Changes in Fluid Content of a Petroleum Reservoir, US Patent 4,969,130, Nov. 6, 1990.

23. Yu, G. et. al., Apparatus and Method for Combined Acoustic and Seismoelectric Logging Measurements, US Patent 5,841,280, Nov. 24, 1998.

24. Zakirov, I.S., E.S. Zakirov, S.I. Aanonsen and B.M. Palatnik, Optimizing Reservoir Performance by Automatic Allocation of Well Rates, Proc. 5th Math. Of Oil Recovery Europe Conf., Leoben, Austria, 3-6 Sept. 1996, pp 375-384, ISBN 3-9500542-0-0.

The invention being thus described, it will be obvious that the same may be varied in many ways. Such variations are not to be regarded as a departure from the spirit and scope of the invention, and all such modifications as would be obvious to one skilled in the art are intended to be included within the scope of the

5 following claims.

WE CLAIM:

1. A method of managing a fluid and/or gas reservoir which assimilates diverse data having different acquisition time scales and spatial scales of coverage for iteratively producing a reservoir development plan that is used for optimizing an overall performance of said reservoir, comprising the steps of:
 - (a) generating an initial reservoir characterization,
 - (b) from the initial reservoir characterization, generating an initial reservoir development plan,
 - (c) when the reservoir development plan is generated, incrementally advancing and generating a capital spending program,
 - (d) when the capital spending program is generated, monitoring a performance of the reservoir by acquiring high rate monitor data from a first set of data measurements taken in the reservoir,
 - (e) further monitoring the performance of the reservoir by acquiring low rate monitor data from a second set of data measurements taken in the reservoir,
 - (f) assimilating together said high rate monitor data and said low rate monitor data,
 - (g) from said high rate monitor data and said low rate monitor data, determining when it is necessary to update said initial reservoir development plan to produce a newly updated reservoir development plan,

(h) when necessary, updating the initial reservoir development plan to produce the newly updated reservoir development plan, and

(i) when the newly updated reservoir development plan is produced, repeating
5 steps (c) through (h) until it is no longer necessary to update the reservoir development plan, said reservoir being nearly depleted when the reservoir development plan is not updated during step (h).

2. The method of managing a fluid and/or gas reservoir of claim 1, wherein the
10 monitoring step (d) for monitoring a performance of the reservoir by acquiring high rate monitor data comprises the steps of:

(d1) acquiring and accumulating and quality checking the high rate monitor data,

15 (d2) using said high rate monitor data to evaluate a single well or a region of several wells and returning to step (c), and

(d3) using said high rate monitor data to evaluate a global field or reservoir,
performing step (e) when the reservoir development plan should be updated or
20 when new low rate reservoir monitor data should be acquired, and returning to step (c) when the reservoir development plan should not be updated or when new low rate reservoir monitor data should not be acquired.

3. The method of managing a fluid and/or gas reservoir of claim 2, wherein the
25 monitoring step (e) for monitoring the performance of the reservoir by acquiring low rate monitor data comprises the steps of:

(e1) determining when new low rate reservoir monitor data should be acquired via
new measurements by performing a sensitivity analysis survey predesign study to
30 determine if the new measurements are expected to introduce new information,

(e2) acquiring the new low rate reservoir monitor data when it is determined that the new low rate reservoir monitor data should be acquired and the new measurements will introduce new information,

5 (e3) updating a reservoir model when new low rate reservoir monitor data should not be acquired via new measurements, and

(e4) updating a production forecast and an economic analysis when the reservoir model is updated or when the low rate reservoir monitor data is acquired during
10 step (e2).

4. The method of managing a fluid and/or gas reservoir of claim 1, wherein the generating step (a) for generating an initial reservoir characterization comprises the step of:

15 performing a preliminary engineering step in parallel with a geological modeling step in order to reconcile a set of geoscience interpretations made using static data during a geological modeling step with a set of engineering interpretations made using dynamic or performance related data during a preliminary engineering step.

20 5. The method of managing a fluid and/or gas reservoir of claim 4, wherein the generating step (a) for generating an initial reservoir characterization further comprises the steps of:

25 (a1) determining for a particular reservoir field a set of development and depletion strategies,

(a2) determining a set of integrated study objectives ,

30 (a3) performing data acquisition, quality control, and analysis,

(a4) performing preliminary engineering, and

(a5) performing geological modeling in parallel with the preliminary engineering.

5 6. The method of managing a fluid and/or gas reservoir of claim 5, further comprising:

(x) determining if either a rigorous scientific approach associated with a numerical forecasting model should be used to build a numerical simulator for generating a
10 production forecast or if various standard analytical methods which are not associated with the numerical forecasting model should be used to generate the production forecast,

a numerical model studies step being performed when the rigorous scientific
15 approach associated with the numerical forecasting model is used,

an analytical model studies step being performed when the various standard analytical methods are used.

20 7. The method of managing a fluid and/or gas reservoir of claim 6, wherein the generating step (b) for generating an initial reservoir development plan from the initial reservoir characterization comprises the steps of:

(b1) in response to the determining step (x) for determining if said rigorous
25 scientific approach or said various standard analytical methods should be used to generate said production forecast, performing either said numerical model studies step or said analytical model studies step,

(b2) generating a production and reserves forecast in response to the numerical
30 model studies step or the analytical model studies step,

(b3) generating facilities requirements from the production and reserves forecast,

(b4) considering environmental issues in response to the development and depletion strategies determined during step (a1),

5

(b5) performing an economics and risk analysis study while taking into account the environmental considerations, the production and reserves forecast, and the facilities requirements, and

10 (b6) producing an optimized development plan in response to and in view of the economics and risk analysis.

8. The method of managing a fluid and/or gas reservoir of claim 5, wherein the performing step (a3) for performing data acquisition, quality control, and analysis
15 comprises the steps of:

(a3.1) gathering together a first set of data relating to a particular reservoir field under study in a study plan and then gathering a set of supplemental data from alternative sources to supplement said first set of data if said first set of data is not
20 sufficient to produce a database of data which includes a plurality of data,

(a3.2) verifying that the plurality of data in the database are consistent with each other thereby producing a verified database having a plurality of data, and

25 (a3.3) verifying said study plan to verify that said plurality of data in the verified database is sufficient as to amount or quality or quantity, and, if said plurality of data is not sufficient, adjusting a scope of said study plan.

0965951.091200

10. The method of managing a fluid and/or gas reservoir of claim 9, wherein the performing step (a4) for performing preliminary engineering further comprises the steps of:

5 (a4.7) determining an incremental rate and recovery potential for estimating incremental oil rates and potential oil recoveries associated with the production enhancement opportunities,

(a4.8) determining completion workover and infill guidelines adapted for
10 monitoring the impact of a completion workover or infill workplan, generating additional production data, determining if the production enhancement opportunities are correct, and redesigning the completion workover of said completion workover and infill guidelines in response thereto,

15 (a4.9) determining, in a relative permeability and capillary pressure saturation model, the flow characteristics of oil and gas and water when all exist simultaneously in a reservoir,

(a4.10) investigating, in a single well or reservoir 'sector model', specific reservoir
20 mechanisms and the impact the mechanisms have on a full field model design,

(a4.11) using, in connection with reservoir mechanism sensitivity, alternative grid descriptions with one of the 'sector models' and determining which 'particular alternative grid description' better represents a mechanism which exists in the
25 reservoir field, and

(a4.12) with respect to a reservoir model design criteria, determining what must be done to properly design a reservoir model and producing a set of 'reservoir model design criteria' in response to the 'reservoir fluid properties' and the 'production
30 injection history' and the 'reservoir pressure history' and the 'particular alternative grid description'.

11. The method of managing a fluid and/or gas reservoir of claim 8, wherein the performing step (a5) for performing geological modeling comprises the steps of:

5 (a5.1) determining a preliminary petrophysical model representing a method for converting well logs into a calculated reservoir property profile at each well location,

10 (a5.2) determining a final petrophysical model from the preliminary petrophysical model and said preliminary engineering, said final petrophysical model representing information relating to a set of more detailed reservoir properties within said structural framework,

15 (a5.3) determining a regional geologic model representing a regional geology in an earth formation associated with a particular reservoir field and applying a framework of sedimentology and stratigraphy to said formation during a sedimentologic and stratigraphic analyses,

20 (a5.4) in response to the sedimentologic and stratigraphic analyses, performing detailed stratigraphic correlations between wells and establishing continuity of geologic horizons across the reservoir field, and

25 (a5.5) performing a geomechanical analysis which in association with a set of geomechanical properties of the reservoir enables the conversion of time measured data from seismic into depth measurements and provides an indication of reservoir stresses which can be computed from the geomechanical properties.

12. The method of managing a fluid and/or gas reservoir of claim 11, wherein the performing step (a5) for performing geological modeling further comprises the steps of:

5

(a5.6) defining a structural framework of the reservoir in response to the geomechanical analysis and the detailed stratigraphic correlations, the structural framework of the reservoir describing an overall shape of the reservoir,

10 (a5.7) defining a set of well and interval property summaries in response to said final petrophysical model and a seismic attribute analysis, the well and interval property summaries providing seismic information enabling one to relate a seismic response to a set of measured properties from well logs,

15 (a5.8) defining a reservoir structure and property model in response to the well and interval property summaries and the seismic attribute analysis and the structural framework,

(a5.9) performing reservoir volume calculations which provide an estimate of fluids
20 in place in the reservoir in response to the reservoir structure and property model,

(a5.10) comparing, in a volumes consistent decision, the reservoir volume calculations with a material balance from preliminary engineering, and, if the comparing step reveals the volumes are consistent, a geoscience interpretation of
25 the reservoir agrees with an interpretation of the reservoir from a performance standpoint, and, if the comparing step reveals the volumes are not consistent, either adjusting said geoscience interpretation or identifying unresolved uncertainties.

13. The method of managing a fluid and/or gas reservoir of claim 7 wherein the performing step (b1) for performing a numerical model studies step comprises the steps of:

5

(b1.1) defining a property distribution in a 3D structure and property model,

(b1.2) defining a grid system in a 3D simulator grid system,

10 (b1.3) defining a fluid property and saturation model,

(b1.4) defining preliminary estimates of the extent or size of an aquifer in an initial reservoir conditions and aquifer model,

15 (b1.5) combining the property distribution and the grid system and the fluid property and saturation model and the preliminary estimates of the extent or size of the aquifer in a 3D reservoir simulator for defining a rock model in the reservoir simulator and superimposing a saturation distribution in the rock model and creating an initial reservoir model in the reservoir simulator,

20

(b1.6) performing a volumes consistent check to determine whether there is consistency in initial volumes and whether the grid system that is superimposed on the rock model is a reliable representation of a property description developed during the geological modeling step (a5), and

25

(b1.7) when there is consistency in the initial volumes, generating a corrected volume model.

14. The method of managing a fluid and/or gas reservoir of claim 13 wherein the performing step (b1) for performing a numerical model studies step further comprises the steps of:

5

(b1.8) when there is not consistency, since the grid system fails to reproduce the property description, adjusting, in a model property adjustments step, the grid system until the grid system is a reliable representation of the property description,

10 (b1.9) defining historical production and injection rate constraints,

(b1.10) combining the corrected volume model with the historical production and injection rate constraints for running, in a model response to historic rate constraints step, the model through a historic period, obtaining a set of model responses, and
15 comparing the model responses to actual measured performance,

(b1.11) comparing, in a model reproduces history step, the model performance to the historical data to determine if the model performance reproduces the historical data,
20

(b1.12) if the model performance did not reproduce the historical data, making adjustments, in a model property adjustments step, to the model properties,

(b1.13) storing and identifying the adjustments to the model properties as
25 uncertainties in sensitivity and risk analysis, and

(b1.14) if the model performance did reproduce the historical data after having performed the making adjustments step and since a history calibrated model is created, generating a first output signal for use by a production and reserves
30 forecast, said first output signal including the history calibrated model and the uncertainties.

15. The method of managing a fluid and/or gas reservoir of claim 7 wherein the performing step (b1) for performing an analytical model studies step comprises:

- 5 (b1.1) providing input data to the analytical model study, said input data including analogous reservoir performance, well drilling and completion histories, historic well performance trends, reservoir property and structure maps, and material balance volumes and aquifer model,
- 10 (b1.2) from plots of production trends in the historic well performance trends, establishing a set of decline characteristics or a set of productivity characteristics of the reservoir field thereby generating well production decline characteristics which forecasts future performance trends from existing wells,
- 15 (b1.3) from the historic well performance trends, mapping, in map displays of well performance indicators, several performance indicators including the total volumes of fluids at different well sites in order to examine which areas of a reservoir field are better or worse than average or better or worse than their companions wells at the different well sites,
- 20 (b1.4) comparing, in a conformance decision, the map of the performance indicators including total volumes of fluids at the different well sites with a geologic interpretation set forth in the reservoir property and structure maps and determining if any disagreement exists between said map and said geologic interpretation,
- 25 (b1.5) if the disagreement does not exist and there is no total conformance, identifying any potential infill well opportunities reflecting any opportunities to drill any infill wells,

(b1.6) if the disagreement does exist and there is total conformance, determining, in a volumetric and material balance fluids in place estimates step, how the well performance trends balance out with estimates of fluids in place and pressure support from material balance calculations, and

(b1.7) in response to the well production decline characteristics generated during the establishing step (b1.2), identifying workover and artificial lift candidates.

16. The method of managing a fluid and/or gas reservoir of claim 15 wherein the performing step (b1) for performing an analytical model studies step further comprises:

(b1.8) in response to the well production decline characteristics, identifying from actual well performance, in a statistical analysis of well indicators, an average expected performance,

(b1.9) comparing individual wells to said average expected performance to determine where in the reservoir field there exists superior performing wells and where in said field there exists poorer performing wells, and, responsive thereto, selecting via said potential infill well opportunities step opportunities to either enhance existing wellbores or to drill new wellbores,

(b1.10) in response to the well production decline characteristics and having established the decline characteristics for existing wells, forecasting for that group of existing wells, in current well forecasts of production and reserves, future performance trends of the reservoir field if no action is taken,

(b1.11) in response to the well production decline characteristics and the workover and artificial lift candidates, generating incremental production forecasts,

(b1.12) in response to the well production decline characteristics and the potential infill well opportunities, generating infill forecasts of production and reserves representing a forecast of what an extra well in a particular location might generate,

5 (b1.13) determining if conformance exists between the incremental production forecasts, the current well forecasts of production and reserves, the infill forecasts of production and reserves, and the volumetric and material balance fluids in place estimates,

10 (b1.14) if conformance does exist, generating a second output signal for use by a production and reserves forecast, the second output signal including current well forecasts of production and reserves, enhanced well production forecasts, and infill forecasts of production and reserves, and

15 (b1.15) if conformance does not exist, identifying uncertainties and then generating said second output signal.

17. The method of managing a fluid and/or gas reservoir of claim 14, wherein the generating step (b2) for generating a production and reserves forecast in response to
20 the numerical model studies step comprises the steps of:

(b2.1) in response to a plurality of constraints and to the first output signal from the numerical model studies step which includes the history calibrated model, running a model in a simulator and generating a production forecast representing the way a
25 reservoir responds to a development plan, said development plan defining a mechanism representing a process that is active in the reservoir field,

(b2.2) determining whether an implementation plan of the mechanism or whether the constraints can be changed or optimized,

30

(b2.3) if the implementation plan or the constraints can be changed or optimized, changing the implementation plan of the mechanism or the constraints, re-running the model in the simulator, and generating another production forecast,

- 5 (b2.4) if the implementation plan or the constraints cannot be changed or optimized, determining if the mechanism representing the process that is active in the reservoir field can be changed, and

- (b2.5) if the mechanism can be changed which represents a new development plan
10 or new mechanism, revising an implementation plan of the new mechanism to create a new implementation plan and re-running the model in the simulator thereby generating still another production forecast.

18. The method of managing a fluid and/or gas reservoir of claim 17, wherein the
15 generating step (b2) for generating a production and reserves forecast in response to the numerical model studies step further comprises the steps of:

- (b2.6) if the new implementation plan or the constraints cannot be changed or
optimized and if the new mechanism cannot be changed, determine if there is any
20 need for parametric sensitivity runs,

- (b2.7) if there is a need for parametric sensitivity runs, identify a set of
uncertainties, alter a reservoir description in the history calibrated model, and repeat
steps (b2.1) to (b2.5),

- 25 (b2.8) if there is no need for any parametric sensitivity runs, generating a third output signal which includes reservoir fluids production rates and pressures and total fluids injection rates and pressures for the facilities requirements step (b3) and a reservoir development plan for the economics and risk analysis step (b5), the
30 facilities requirements step (b3) responding to that third output signal;

(b2.9) in response to the plurality of constraints and the second output signal from the analytical model studies step which includes the current well forecasts of production and reserves, the enhanced well production forecasts, and the infill forecasts of production and reserves, performing, in the analytical production and reserves forecast, analytical modeling and, responsive thereto, generating an analytical forecast for a particular mechanism and a particular set of development constraints, and

(b2.10) repeating steps (b2.2) through b(2.8) until there is no need for any parametric sensitivity runs and generating a fourth output signal which includes reservoir fluids production rates and pressures and total fluids injection rates and pressures for the facilities requirements step (b3) and a reservoir development plan for the economics and risk analysis step (b5), the facilities requirements step (b3) responding to that fourth output signal.

19. The method of managing a fluid and/or gas reservoir of claim 16, wherein the generating step (b2) for generating a production and reserves forecast in response to the analytical model studies step comprises the steps of:

(b2.1) in response to a plurality of constraints and to the first output signal from the numerical model studies step which includes the history calibrated model, running a model in a simulator and generating a production forecast representing the way a reservoir responds to a development plan, said development plan defining a mechanism representing a process that is active in the reservoir field,

(b2.2) determining whether an implementation plan of the mechanism or whether the constraints can be changed or optimized,

(b2.3) if the implementation plan or the constraints can be changed or optimized, changing the implementation plan of the mechanism or the constraints, re-running the model in the simulator, and generating another production forecast,

(b2.4) if the implementation plan or the constraints cannot be changed or optimized, determining if the mechanism representing the process that is active in the reservoir field can be changed, and

5

(b2.5) if the mechanism can be changed which represents a new development plan or new mechanism, revising an implementation plan of the new mechanism to create a new implementation plan and re-running the model in the simulator thereby generating still another production forecast.

10

20. The method of managing a fluid and/or gas reservoir of claim 19, wherein the generating step (b2) for generating a production and reserves forecast in response to the analytical model studies step further comprises the steps of:

15

(b2.6) if the new implementation plan or the constraints cannot be changed or optimized and if the new mechanism cannot be changed, determine if there is any need for parametric sensitivity runs,

20

(b2.7) if there is a need for parametric sensitivity runs, identify a set of uncertainties, alter a reservoir description in the history calibrated model, and repeat steps (b2.1) to (b2.5),

25

(b2.8) if there is no need for any parametric sensitivity runs, generating a third output signal which includes reservoir fluids production rates and pressures and total fluids injection rates and pressures for the facilities requirements step (b3) and a reservoir development plan for the economics and risk analysis step (b5), the facilities requirements step (b3) responding to that third output signal;

(b2.9) in response to the plurality of constraints and the second output signal from the analytical model studies step which includes the current well forecasts of production and reserves, the enhanced well production forecasts, and the infill forecasts of production and reserves, performing, in the analytical production and reserves forecast, analytical modeling and, responsive thereto, generating an analytical forecast for a particular mechanism and a particular set of development constraints, and

- 10 (b2.10) repeating steps (b2.2) through b(2.8) until there is no need for any parametric sensitivity runs and generating a fourth output signal which includes reservoir fluids production rates and pressures and total fluids injection rates and pressures for the facilities requirements step (b3) and a reservoir development plan for the economics and risk analysis step (b5), the facilities requirements step (b3)
- 15 responding to that fourth output signal.

21. The method of managing a fluid and/or gas reservoir of claim 18, wherein the generating step (b3) for generating facilities requirements from the production and reserves forecast comprises the steps of:

20 (b3.1) in response to that portion of the third and the fourth output signals from the production and reserves forecasts step (b2) which includes the reservoir fluids production rates and pressures, estimating a first set of facilities that are required for the reservoir fluids production rates and pressures,

25 (b3.2) determining if one or more first set of changes are required to said first set of facilities,

(b3.3) if the one or more first set of changes to the first set of facilities is required, making said first set of changes to said first set of facilities, said one or more first set of changes having associated therewith a capital cost and possible incremental
5 operating cost adapted for use by the economics and risk analysis step (b5),

(b3.4) in response to that portion of the third and the fourth output signals from the production and reserves forecasts step (b2) which includes the total fluids injection rates and pressures, estimating a second set of facilities that are required for the
10 total fluids injection rates and pressures,

(b3.5) determining if one or more second set of changes are required to said second set of facilities, and

(b3.6) if the one or more second set of changes to the second set of facilities is required, making said second set of changes to said second set of facilities, said one or more second set of changes having associated therewith a capital cost and possible incremental operating cost adapted for use by the economics and risk analysis step (b5).
20

22. The method of managing a fluid and/or gas reservoir of claim 20, wherein the generating step (b3) for generating facilities requirements from the production and reserves forecast comprises the steps of:

(b3.1) in response to that portion of the third and the fourth output signals from the production and reserves forecasts step (b2) which includes the reservoir fluids production rates and pressures, estimating a first set of facilities that are required for the reservoir fluids production rates and pressures,
25

(b3.2) determining if one or more first set of changes are required to said first set of facilities,
30

24. The method of managing a fluid and/or gas reservoir of claim 22, wherein the considering step (b4) for considering environmental issues comprises the steps of:

(b4.1) considering special emergency response plans and provisions,

(b4.2) considering pre-construction environmental impact study requirements,

(b4.3) considering interrupted or restricted access to wells and facilities, and

(b4.4) considering government or regulatory approval and audit provisions.

25. The method of managing a fluid and/or gas reservoir of claim 23, wherein the performing step (b5) for performing an economics and risk analysis study comprise the steps of:

(b5.1) in response to the reservoir development plan generated from the production and reserves forecast step (b2), evaluating a set of economics which is associated with said reservoir development plan by generating, responsive to the reservoir development plan, a reservoir production schedule and a reservoir injection schedule and a facility and well schedule,

(b5.2) in response to the facilities requirements step (b3) which includes processing and drilling workover plans, generating a capital cost model and an operating cost model associated therewith,

(b5.3) in response to the environmental considerations step (b4), generating special project costs,

(b5.4) providing, in a plan economic profile, an economic profile and a cash flow summary for the reservoir development plan in response to the reservoir production schedule, the reservoir injection schedule, the facility and well schedule, the capital cost model, the operating cost model, and the special project costs,

(b5.5) determining, in a development and operating risk decision, whether there are significant development and operating risks associated with the reservoir development plan in response to a set of reservoir risk factors,

(b5.6) if there are significant development and operating risks associated with the reservoir development plan, making adjustments to a set of production forecast schedules and returning to step (b5.4) which provides the plan economic profile and the cash flow summary for the reservoir development plan that produces an estimate of risk associated costs, and

(b5.7) if there are no significant development and operating risks associated with the reservoir development plan, determining if there is a reservoir performance risk relating to a character and a nature of the reservoir that has not been established from history matching and geologic studies.

26. The method of managing a fluid and/or gas reservoir of claim 25, wherein the performing step (b5) for performing an economics and risk analysis study comprise the steps of:

(b5.8) if there is a reservoir performance risk, making adjustments to a set of production forecast schedules and returning to step (b5.4),

(b5.9) if there is no reservoir performance risk, determining if there is an environmental risk,

(b5.10) if there is an environmental risk, making adjustments to a set of production forecast schedules and returning to step (b5.4),

(b5.11) if there is no environmental risk, determining if there are any alternative
5 development plans which should be evaluated from an economic standpoint,

(b5.12) if there are one or more alternative development plans which should be evaluated from an economic standpoint, repeating steps (b5.1) through (b5.11) for each of the one or more alternative development plans and, responsive thereto,
10 generating one or more corresponding economic profiles associated, respectively, with the one or more alternative development plans,

(b5.13) if there are no more additional alternative development plans which should be evaluated, comparing each of the economic profiles associated with each of the
15 alternative development plans and assessing the risks associated with each of the economic profiles, and

(b5.14) selecting a particular development plan from among the one or more alternative development plans evaluated during step (b5.12), the particular
20 development plan selected during the selecting step (b5.14) representing the optimized development plan produced during the producing step (b6).

27. The method of managing a fluid and/or gas reservoir of claim 24, wherein the performing step (b5) for performing an economics and risk analysis study comprise
25 the steps of:

(b5.1) in response to the reservoir development plan generated from the production and reserves forecast step (b2), evaluating a set of economics which is associated with said reservoir development plan by generating, responsive to the reservoir
30 development plan, a reservoir production schedule and a reservoir injection schedule and a facility and well schedule,

(b5.2) in response to the facilities requirements step (b3) which includes processing and drilling workover plans, generating a capital cost model and an operating cost model associated therewith,

5

(b5.3) in response to the environmental considerations step (b4), generating special project costs,

(b5.4) providing, in a plan economic profile, an economic profile and a cash flow
10 summary for the reservoir development plan in response to the reservoir production schedule, the reservoir injection schedule, the facility and well schedule, the capital cost model, the operating cost model, and the special project costs,

(b5.5) determining, in a development and operating risk decision, whether there are
15 significant development and operating risks associated with the reservoir development plan in response to a set of reservoir risk factors,

(b5.6) if there are significant development and operating risks associated with the
reservoir development plan, making adjustments to a set of production forecast
20 schedules and returning to step (b5.4) which provides the plan economic profile and the cash flow summary for the reservoir development plan that produces an estimate of risk associated costs, and

(b5.7) if there are no significant development and operating risks associated with
25 the reservoir development plan, determining if there is a reservoir performance risk relating to a character and a nature of the reservoir that has not been established from history matching and geologic studies.

(b5.14) selecting a particular development plan from among the one or more alternative development plans evaluated during step (b5.12), the particular development plan selected during the selecting step (b5.14) representing the optimized development plan produced during the producing step (b6).

29. A method for performing preliminary engineering, comprising the steps of:

- (a) knowing a 'set of fluid properties' in a reservoir fluid properties model,
10 comparing reservoir pressures in a set of reservoir pressure survey data when the 'set of fluid properties' is known, and adjusting the reservoir pressures to a common datum thereby producing a corrected 'reservoir pressure history' which reflects the history of the reservoir pressure corrected to a common datum,
- 15 (b) generating a corrected well 'production and injection history' in response to the set of fluid properties and a reported field production,
- (c) conducting production and pressure test interpretations adapted for conducting a well test of one or more wells, measuring a plurality of pressure and rate versus
20 time test data from the one or more wells, and interpreting the test data when the set of fluid properties is known,
- (d) determining a set of well drilling and completion histories which examines where a set of wells are drilled and how the wells are drilled and completed,
25
- (e) determining a set of production enhancement opportunities in response to the well test of step (c) and the drilling and completion histories of step (d) to identify what immediate opportunities exist to stimulate a well or install a pump that will result in higher production rates, and

30

(f) performing material balance volume and aquifer interpretations for estimating and determining, after extraction and injection of fluids into a formation, what were the original volumes of the fluids in place in the formation.

5 30. The method for performing preliminary engineering of claim 29, further comprises the steps of:

(g) determining an incremental rate and recovery potential for estimating incremental oil rates and potential oil recoveries associated with the production
10 enhancement opportunities,

(h) determining completion workover and infill guidelines adapted for monitoring the impact of a completion workover or infill workplan, generating additional production data, determining if the production enhancement opportunities are
15 correct, and redesigning the completion workover of said completion workover and infill guidelines in response thereto,

(i) determining, in a relative permeability and capillary pressure saturation model, the flow characteristics of oil and gas and water when all exist simultaneously in a
20 reservoir,

(j) investigating, in a single well or reservoir 'sector model', specific reservoir mechanisms and the impact the mechanisms have on a full field model design,

25 (k) using, in connection with reservoir mechanism sensitivity, alternative grid descriptions with one of the 'sector models' and determining which 'particular alternative grid description' better represents a mechanism which exists in the reservoir field, and

32. The method for performing geological modeling of claim 31, further comprising the steps of:

5 (f) defining a structural framework of the reservoir in response to the geomechanical analysis and the detailed stratigraphic correlations, the structural framework of the reservoir describing an overall shape of the reservoir,

10 (g) defining a set of well and interval property summaries in response to said final petrophysical model and a seismic attribute analysis, the well and interval property summaries providing seismic information enabling one to relate a seismic response to a set of measured properties from well logs,

15 (h) defining a reservoir structure and property model in response to the well and interval property summaries and the seismic attribute analysis and the structural framework,

20 (i) performing reservoir volume calculations which provide an estimate of fluids in place in the reservoir in response to the reservoir structure and property model, and

(j) comparing, in a volumes consistent decision, the reservoir volume calculations with a material balance from preliminary engineering, and, if the comparing step reveals the volumes are consistent, a geoscience interpretation of the reservoir agrees with an interpretation of the reservoir from a performance standpoint, and, if
25 the comparing step reveals the volumes are not consistent, either adjusting said geoscience interpretation or identifying unresolved uncertainties.

33. A method for performing numerical model studies, comprising the steps of:

- (a) defining a property distribution in a 3D structure and property model,
- (b) defining a grid system in a 3D simulator grid system,
- (c) defining a fluid property and saturation model,
- (d) defining preliminary estimates of the extent or size of an aquifer in an initial reservoir conditions and aquifer model,
- (e) combining the property distribution and the grid system and the fluid property and saturation model and the preliminary estimates of the extent or size of the aquifer in a 3D reservoir simulator for defining a rock model in the reservoir simulator and superimposing a saturation distribution in the rock model and creating an initial reservoir model in the reservoir simulator,
- (f) performing a volumes consistent check to determine whether there is consistency in initial volumes and whether the grid system that is superimposed on the rock model is a reliable representation of a property description developed during the geological modeling step (a5), and
- (g) when there is consistency in the initial volumes, generating a corrected volume model.

34. The method for performing numerical model studies of claim 33, further comprising the steps of:

5 (h) when there is not consistency, since the grid system fails to reproduce the property description, adjusting, in a model property adjustments step, the grid system until the grid system is a reliable representation of the property description,

(i) defining historical production and injection rate constraints,

10

(j) combining the corrected volume model with the historical production and injection rate constraints for running, in a model response to historic rate constraints step, the model through a historic period, obtaining a set of model responses, and comparing the model responses to actual measured performance,

15

(k) comparing, in a model reproduces history step, the model performance to the historical data to determine if the model performance reproduces the historical data,

(l) if the model performance did not reproduce the historical data, making

20

adjustments, in a model property adjustments step, to the model properties,

(m) storing and identifying the adjustments to the model properties as uncertainties in sensitivity and risk analysis, and

25 (n) if the model performance did reproduce the historical data after having performed the making adjustments step and since a history calibrated model is created, generating a first output signal for use by a production and reserves forecast, said first output signal including the history calibrated model and the uncertainties.

35. A method for performing analytical model studies, comprising the steps of:

- 5 (a) providing input data to the analytical model study, said input data including analogous reservoir performance, well drilling and completion histories, historic well performance trends, reservoir property and structure maps, and material balance volumes and aquifer model,
- 10 (b) from plots of production trends in the historic well performance trends, establishing a set of decline characteristics or a set of productivity characteristics of the reservoir field thereby generating well production decline characteristics which forecasts future performance trends from existing wells,
- 15 (c) from the historic well performance trends, mapping, in map displays of well performance indicators, a set of performance indicators including a total volumes of fluids at different well sites in order to examine which areas of a reservoir field are better or worse than average or better or worse than their companions wells at the different well sites,
- 20 (d) comparing, in a conformance decision, the map of the performance indicators with a geologic interpretation set forth in the reservoir property and structure maps and determining if any disagreement exists between said map and said geologic interpretation,
- 25 (e) if the disagreement does not exist and there is no total conformance, identifying any potential infill well opportunities reflecting any opportunities to drill any infill wells,

(f) if the disagreement does exist and there is total conformance, determining, in a volumetric and material balance fluids in place estimates step, how the well performance trends balance out with estimates of fluids in place and pressure support from material balance calculations, and

(g) in response to the well production decline characteristics generated during the establishing step (b), identifying workover and artificial lift candidates.

36. The method for performing analytical model studies of claim 35, further comprising the steps of:

(h) in response to the well production decline characteristics, identifying from actual well performance, in a statistical analysis of well indicators, an average expected performance,

(i) comparing individual wells to said average expected performance to determine where in the reservoir field there exists superior performing wells and where in said field there exists poorer performing wells, and, responsive thereto, selecting via said potential infill well opportunities step opportunities to either enhance existing wellbores or to drill new wellbores,

(j) in response to the well production decline characteristics and having established the decline characteristics for existing wells, forecasting for that group of existing wells, in current well forecasts of production and reserves, future performance trends of the reservoir field if no action is taken,

(k) in response to the well production decline characteristics and the workover and artificial lift candidates, generating incremental production forecasts,

(l) in response to the well production decline characteristics and the potential infill well opportunities, generating infill forecasts of production and reserves representing a forecast of what an extra well in a particular location might generate,

5 (m) determining if conformance exists between the incremental production forecasts, the current well forecasts of production and reserves, the infill forecasts of production and reserves, and the volumetric and material balance fluids in place estimates,

10 (n) if conformance does exist, generating a second output signal for use by a production and reserves forecast, the second output signal including current well forecasts of production and reserves, enhanced well production forecasts, and infill forecasts of production and reserves, and

15 (o) if conformance does not exist, identifying uncertainties and then generating said second output signal.

37. A method of generating a production and reserves forecast, comprising the steps of:

20 (a) in response to a plurality of constraints and to a history calibrated model, running a model in a simulator and generating a production forecast representing a way a reservoir responds to a development plan, said development plan defining a mechanism representing a process that is active in a reservoir field,

25 (b) determining whether an implementation plan of the mechanism or whether the constraints can be changed or optimized,

(c) if the implementation plan or the constraints can be changed or optimized,
30 changing the implementation plan of the mechanism or the constraints, re-running the model in the simulator, and generating another production forecast,

(d) if the implementation plan or the constraints cannot be changed or optimized, determining if the mechanism representing the process that is active in the reservoir field can be changed, and

5

(e) if the mechanism can be changed which represents a new development plan or new mechanism, revising an implementation plan of the new mechanism to create a new implementation plan and re-running the model in the simulator thereby generating still another production forecast.

10

38. The method of generating a production and reserves forecast of claim 37, further comprising the steps of:

(f) if the new implementation plan or the constraints cannot be changed or

15

optimized and if the new mechanism cannot be changed, determine if there is any need for parametric sensitivity runs,

(g) if there is a need for parametric sensitivity runs, identify a set of uncertainties, alter a reservoir description in the history calibrated model, and repeat steps

20

(a) to (e),

(h) if there is no need for any parametric sensitivity runs, generating a third output signal which includes reservoir fluids production rates and pressures and total fluids injection rates and pressures and a reservoir development plan;

25

(i) in response to the plurality of constraints and a current well forecast of production and reserves, an enhanced well production forecast, and an infill forecast of production and reserves, performing, in the analytical production and reserves forecast, analytical modeling and, responsive thereto, generating an analytical
30 forecast for a particular mechanism and a particular set of development constraints, and

(j) repeating steps (b) through (h) until there is no need for any parametric sensitivity runs and generating a fourth output signal which includes reservoir fluids production rates and pressures and total fluids injection rates and pressures and a reservoir development plan.

39/ A method of determining a set of facilities requirements in response to a production and reserves forecast, comprising the steps of:

(a) in response to the production and reserves forecast which includes a set of data representing reservoir fluids production rates and pressures, estimating a first set of facilities that are required for the reservoir fluids production rates and pressures,

(b) determining if one or more first set of changes are required to said first set of facilities,

(c) if the one or more first set of changes to the first set of facilities is required, making said first set of changes to said first set of facilities, said one or more first set of changes having associated therewith a capital cost and possible incremental operating cost adapted for use by an economics and risk analysis study,

(d) in response to the production and reserves forecast which includes a set of data representing total fluids injection rates and pressures, estimating a second set of facilities that are required for the total fluids injection rates and pressures,

(e) determining if one or more second set of changes are required to said second set of facilities, and

(f) if the one or more second set of changes to the second set of facilities is required, making said second set of changes to said second set of facilities, said one or more second set of changes having associated therewith a capital cost and possible incremental operating cost adapted for use by an economics and risk analysis study.

40. A method for performing an economics and risk analysis study, comprising the steps of:

(a) in response to a reservoir development plan generated from a production and reserves forecast, evaluating a set of economics which is associated with said reservoir development plan by generating, responsive to the reservoir development plan, a reservoir production schedule and a reservoir injection schedule and a facility and well schedule,

(b) in response to a set of facilities requirements which includes processing and drilling workover plans, generating a capital cost model and an operating cost model associated therewith,

(c) in response to a set of environmental considerations, generating special project costs,

(d) providing, in a plan economic profile, an economic profile and a cash flow summary for the reservoir development plan in response to the reservoir production schedule, the reservoir injection schedule, the facility and well schedule, the capital cost model, the operating cost model, and the special project costs,

(e) determining, in a development and operating risk decision, whether there are significant development and operating risks associated with the reservoir development plan in response to a set of reservoir risk factors,

5 (l) if there are one or more alternative development plans which should be evaluated from an economic standpoint, repeating steps (a) through (k) for each of the one or more alternative development plans and, responsive thereto, generating one or more corresponding economic profiles associated, respectively, with the one or more alternative development plans,

10 (m) if there are no more additional alternative development plans which should be evaluated, comparing each of the economic profiles associated with each of the alternative development plans and assessing the risks associated with each of the economic profiles, and

15 (n) selecting a particular development plan from among the one or more alternative development plans evaluated during step (l), the particular development plan selected during the selecting step (n) representing an optimized development plan.

20 42. A method of determining a set of environmental considerations adapted for use in connection with an integrated reservoir optimization method, comprising the steps of:

- (a) considering special emergency response plans and provisions,
- (b) considering pre-construction environmental impact study requirements,
- 25 (c) considering interrupted or restricted access to wells and facilities, and
- (d) considering government or regulatory approval and audit provisions.

1990-1991		1991-1992		1992-1993		1993-1994		1994-1995		1995-1996		1996-1997		1997-1998		1998-1999		1999-2000		2000-2001		2001-2002		2002-2003		2003-2004		2004-2005		2005-2006		2006-2007		2007-2008		2008-2009		2009-2010		2010-2011		2011-2012		2012-2013		2013-2014		2014-2015		2015-2016		2016-2017		2017-2018		2018-2019		2019-2020		2020-2021		2021-2022		2022-2023		2023-2024		2024-2025		2025-2026		2026-2027		2027-2028		2028-2029		2029-2030		2030-2031		2031-2032		2032-2033		2033-2034		2034-2035		2035-2036		2036-2037		2037-2038		2038-2039		2039-2040		2040-2041		2041-2042		2042-2043		2043-2044		2044-2045		2045-2046		2046-2047		2047-2048		2048-2049		2049-2050		2050-2051		2051-2052		2052-2053		2053-2054		2054-2055		2055-2056		2056-2057		2057-2058		2058-2059		2059-2060		2060-2061		2061-2062		2062-2063		2063-2064		2064-2065		2065-2066		2066-2067		2067-2068		2068-2069		2069-2070		2070-2071		2071-2072		2072-2073		2073-2074		2074-2075		2075-2076		2076-2077		2077-2078		2078-2079		2079-2080		2080-2081		2081-2082		2082-2083		2083-2084		2084-2085		2085-2086		2086-2087		2087-2088		2088-2089		2089-2090		2090-2091		2091-2092		2092-2093		2093-2094		2094-2095		2095-2096		2096-2097		2097-2098		2098-2099		2099-2100		2100-2101		2101-2102		2102-2103		2103-2104		2104-2105		2105-2106		2106-2107		2107-2108		2108-2109		2109-2110		2110-2111		2111-2112		2112-2113		2113-2114		2114-2115		2115-2116		2116-2117		2117-2118		2118-2119		2119-2120		2120-2121		2121-2122		2122-2123		2123-2124		2124-2125		2125-2126		2126-2127		2127-2128		2128-2129		2129-2130		2130-2131		2131-2132		2132-2133		2133-2134		2134-2135		2135-2136		2136-2137		2137-2138		2138-2139		2139-2140		2140-2141		2141-2142		2142-2143		2143-2144		2144-2145		2145-2146		2146-2147		2147-2148		2148-2149		2149-2150		2150-2151		2151-2152		2152-2153		2153-2154		2154-2155		2155-2156		2156-2157		2157-2158		2158-2159		2159-2160		2160-2161		2161-2162		2162-2163		2163-2164		2164-2165		2165-2166		2166-2167		2167-2168		2168-2169		2169-2170		2170-2171		2171-2172		2172-2173		2173-2174		2174-2175		2175-2176		2176-2177		2177-2178		2178-2179		2179-2180		2180-2181		2181-2182		2182-2183		2183-2184		2184-2185		2185-2186		2186-2187		2187-2188		2188-2189		2189-2190		2190-2191		2191-2192		2192-2193		2193-2194		2194-2195		2195-2196		2196-2197		2197-2198		2198-2199		2199-2200		2200-2201		2201-2202		2202-2203		2203-2204		2204-2205		2205-2206		2206-2207		2207-2208		2208-2209		2209-2210		2210-2211		2211-2212		2212-2213		2213-2214		2214-2215		2215-2216		2216-2217	
-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--

data having different acquisition time scales and spatial scales of coverage for iteratively producing a reservoir development plan that is used for optimizing an overall

characterization, (b) from the initial reservoir characterization, generating an initial

incrementally advancing and generating a capital spending program, (d) when the capital spending program is generated, monitoring a performance of the reservoir by acquiring

high rate monitor data from a first set of data measurements taken in the reservoir and using the high rate monitor data to perform well-regional and field-reservoir evaluations.

data from a second set of data measurements taken in the reservoir, (f) assimilating

together the high rate monitor data and the low rate monitor data, (g) from the high rate monitor data and the low rate monitor data, determining when it is necessary to update

the initial reservoir development plan to produce a newly updated reservoir development plan, (h) when necessary, updating the initial reservoir development plan to produce the

newly updated reservoir development plan, and (i) when the newly updated reservoir

development plan is produced, repeating steps (c) through (h). A detailed disclosure is provided herein relating to the step (a) for generating the initial reservoir characterization and the step (b) for generating the initial reservoir development plan.


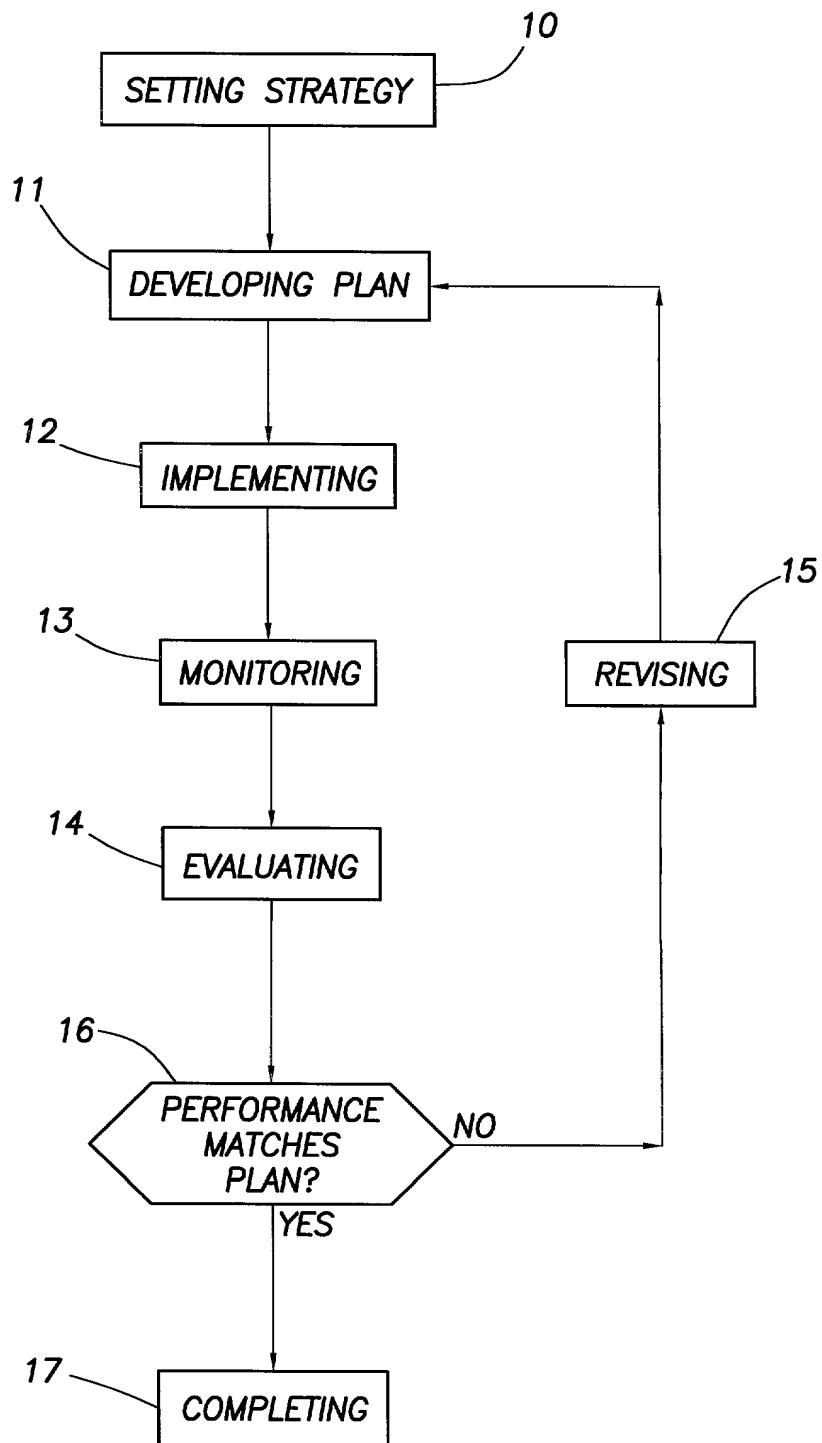


FIG. 1
(PRIOR ART)

FIG.2
(PRIOR ART)

2/24

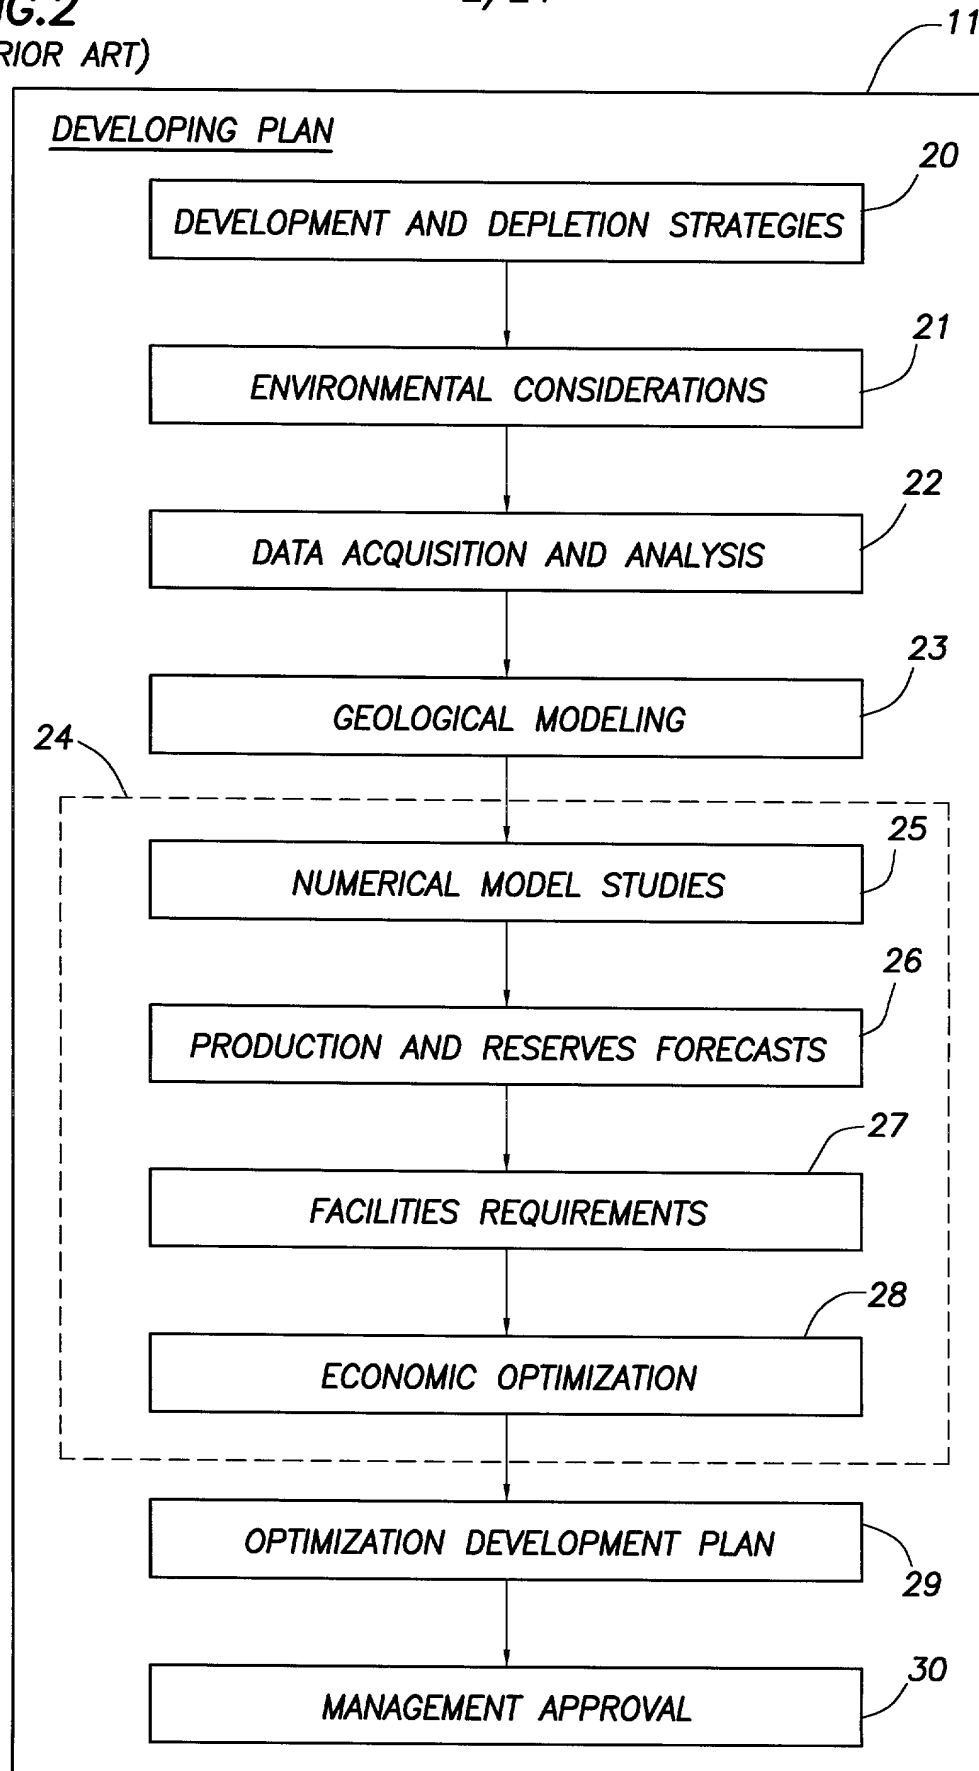

+

3/24


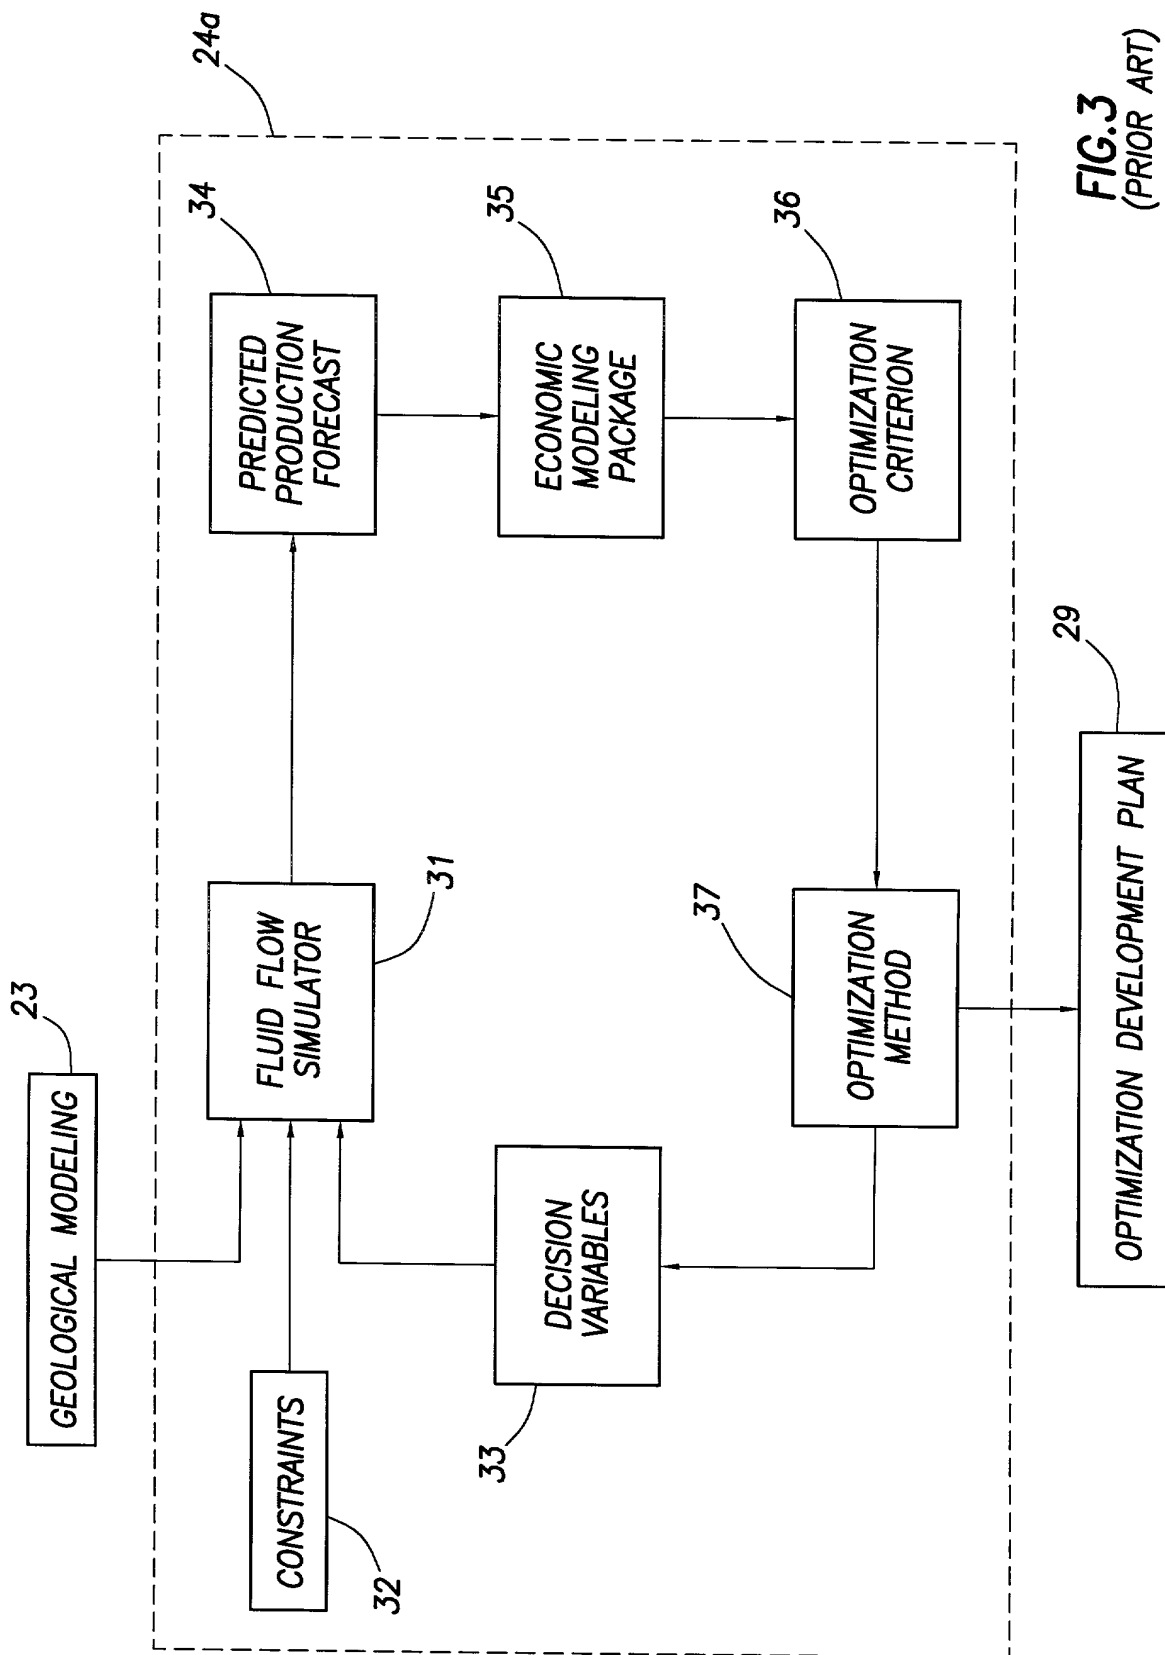


FIG. 3
(PRIOR ART)


+

+

4/24

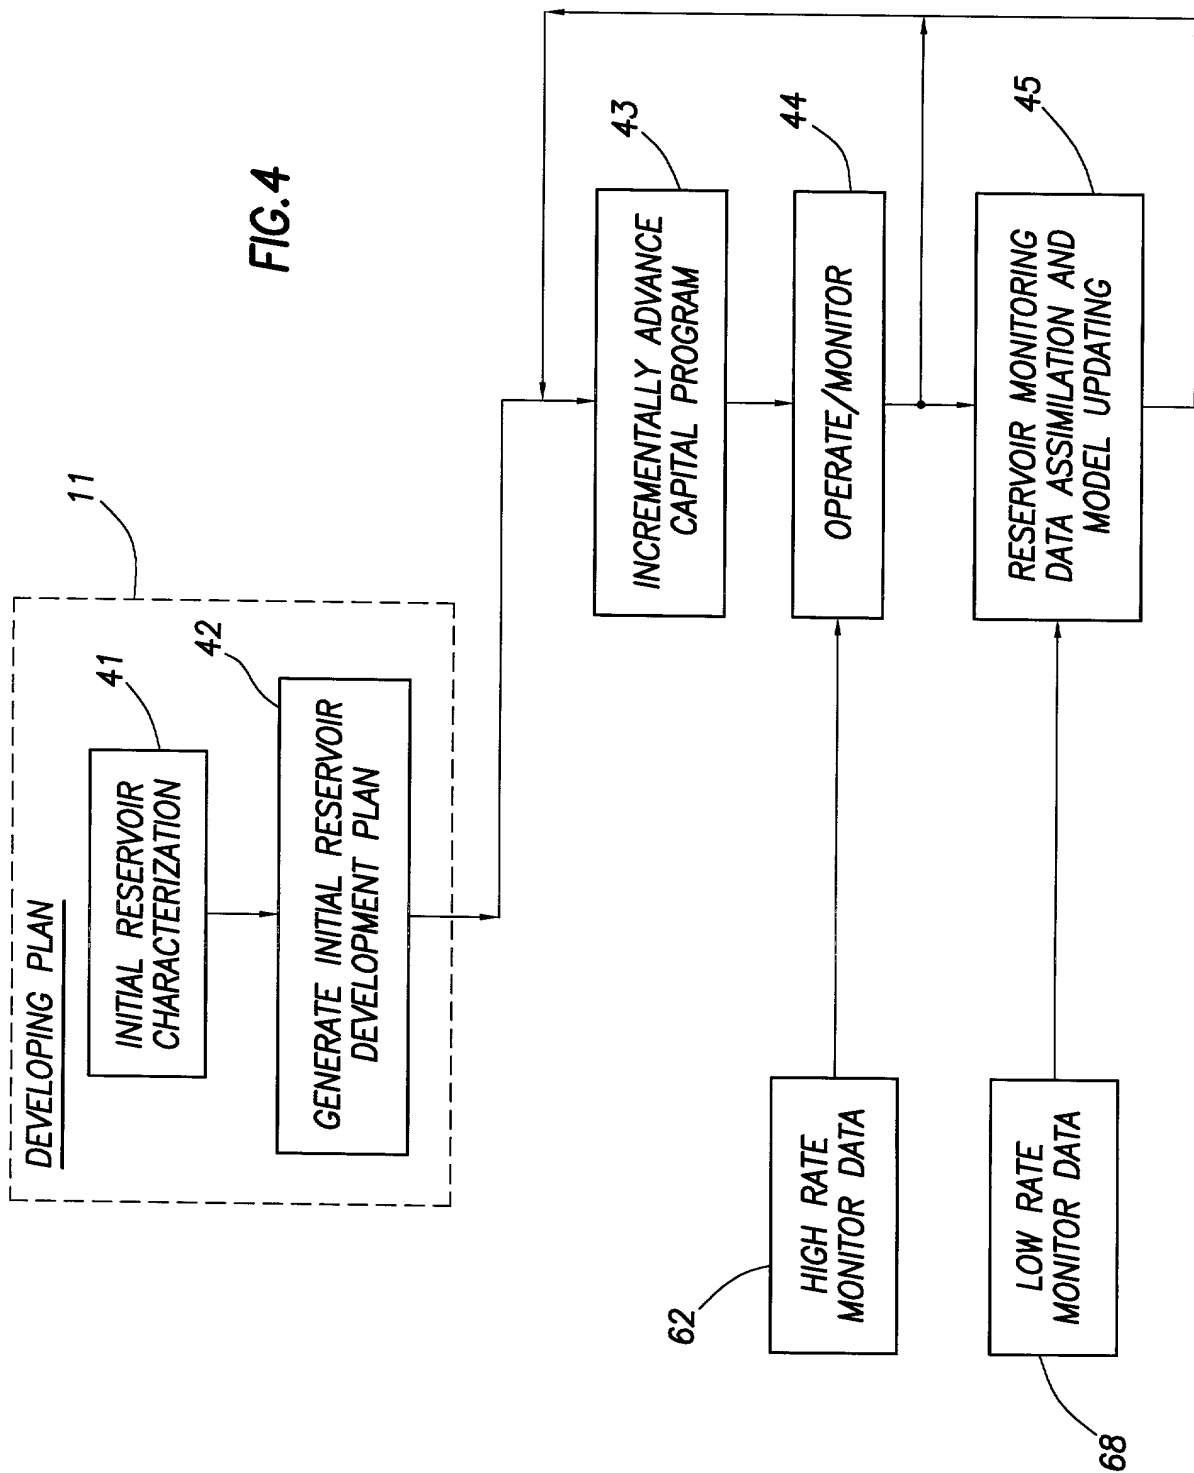

+

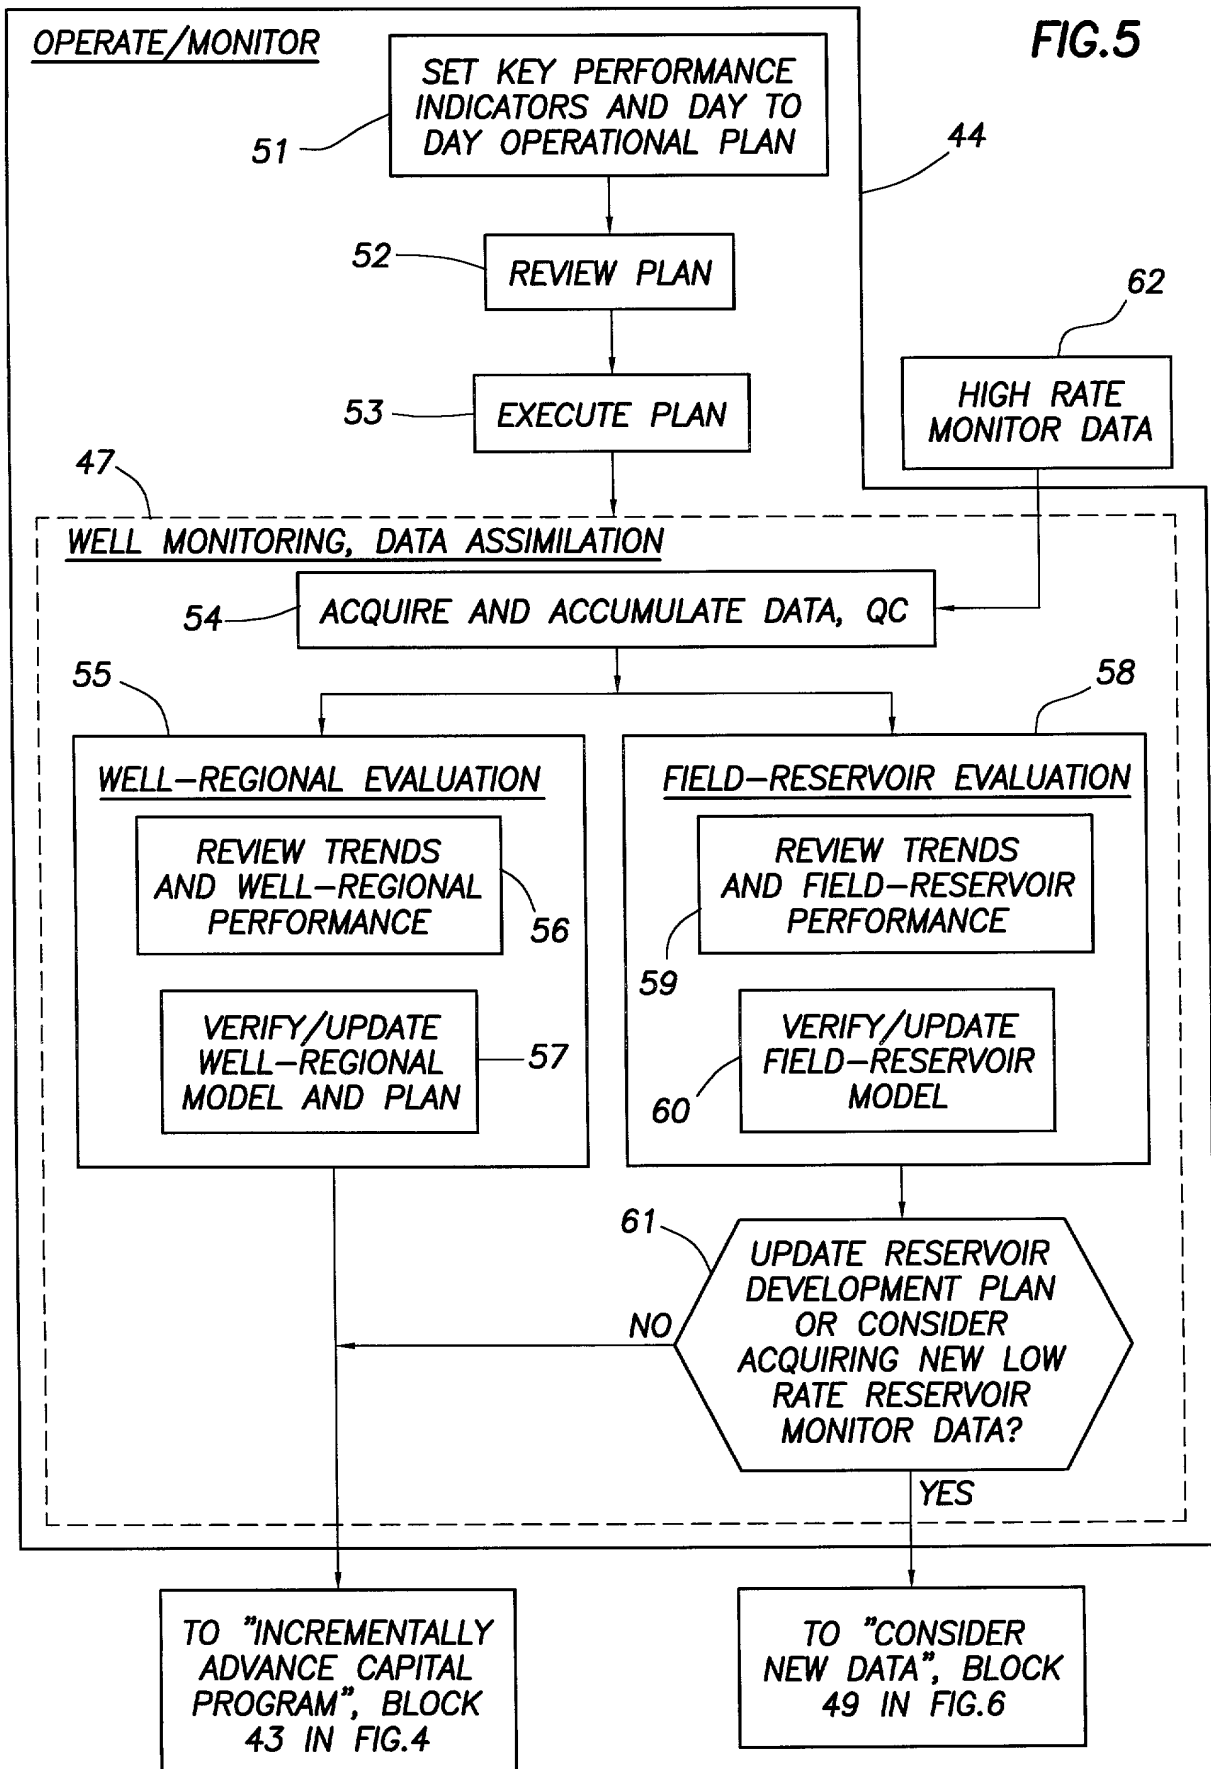

RESERVOIR MONITORING, DATA
ASSIMILATION AND MODEL UPDATING


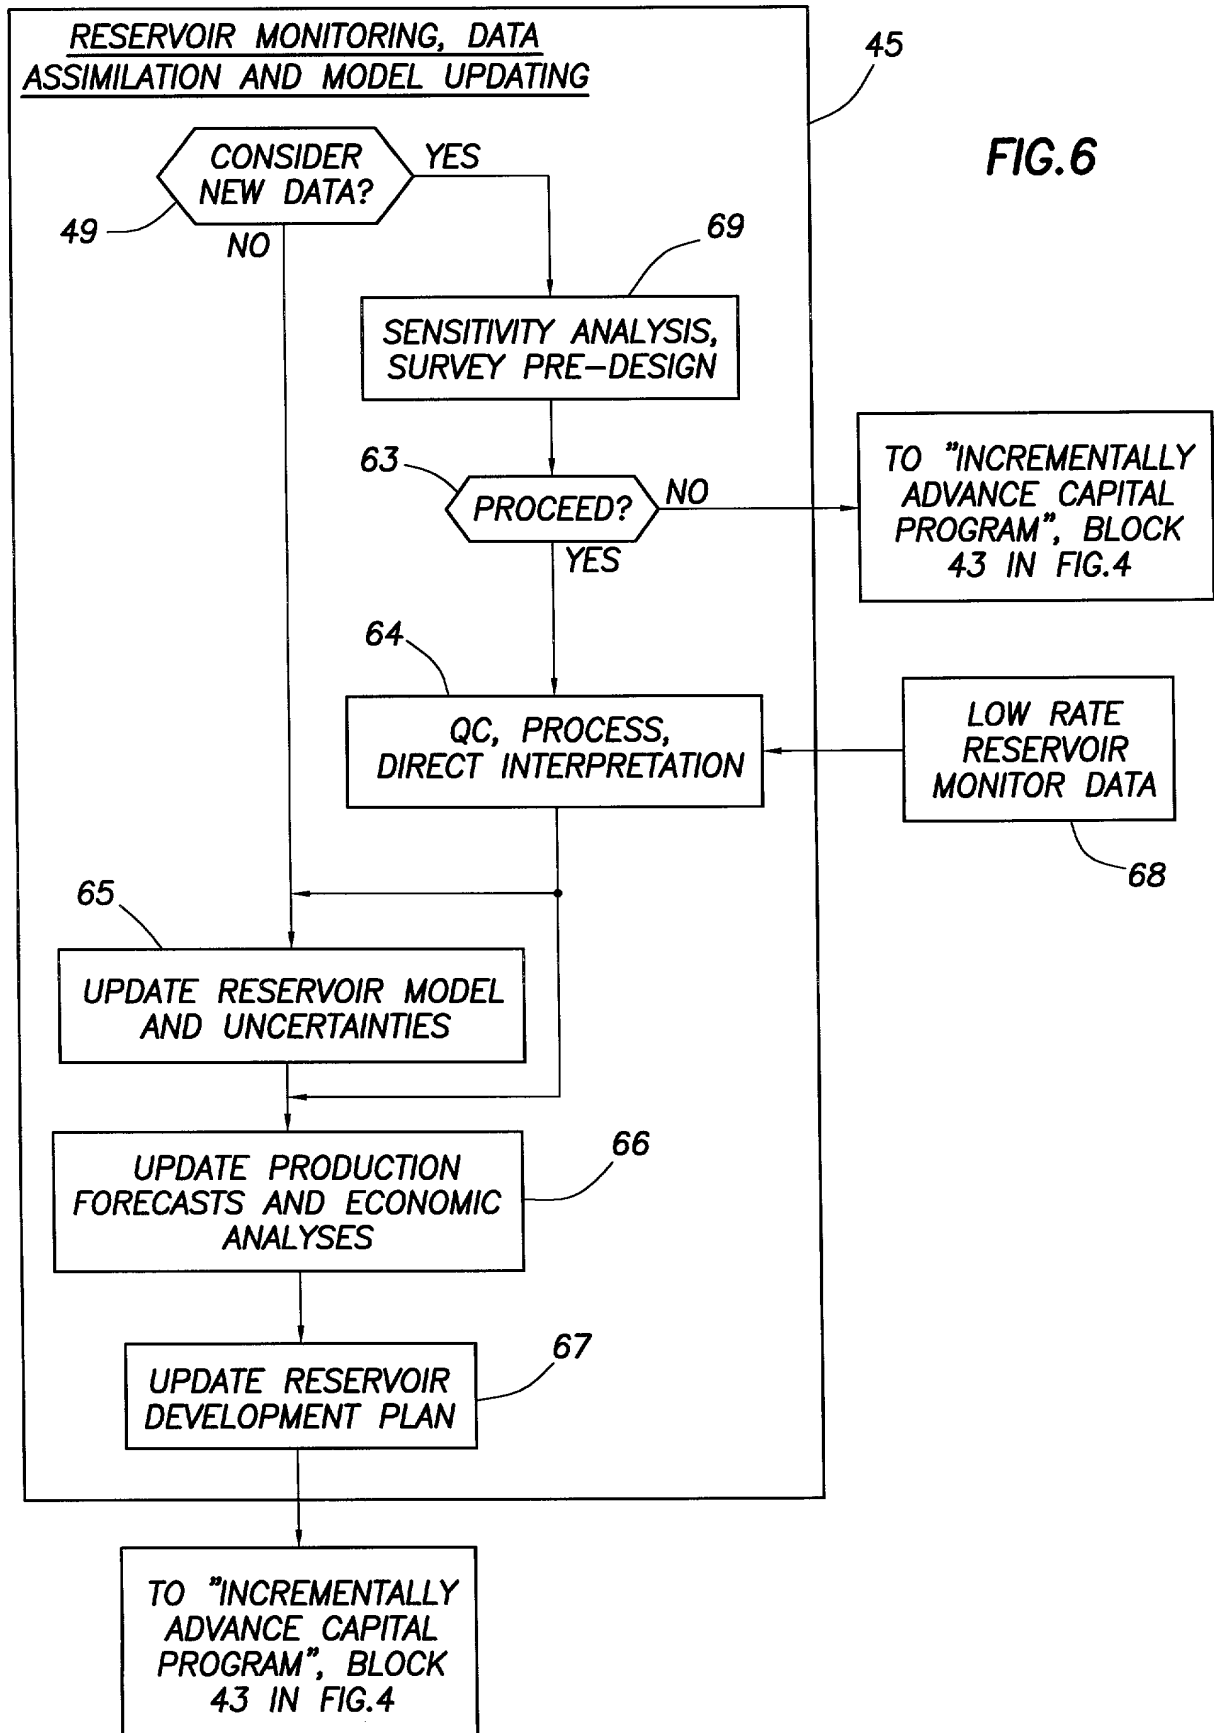





FIG.8

8/24

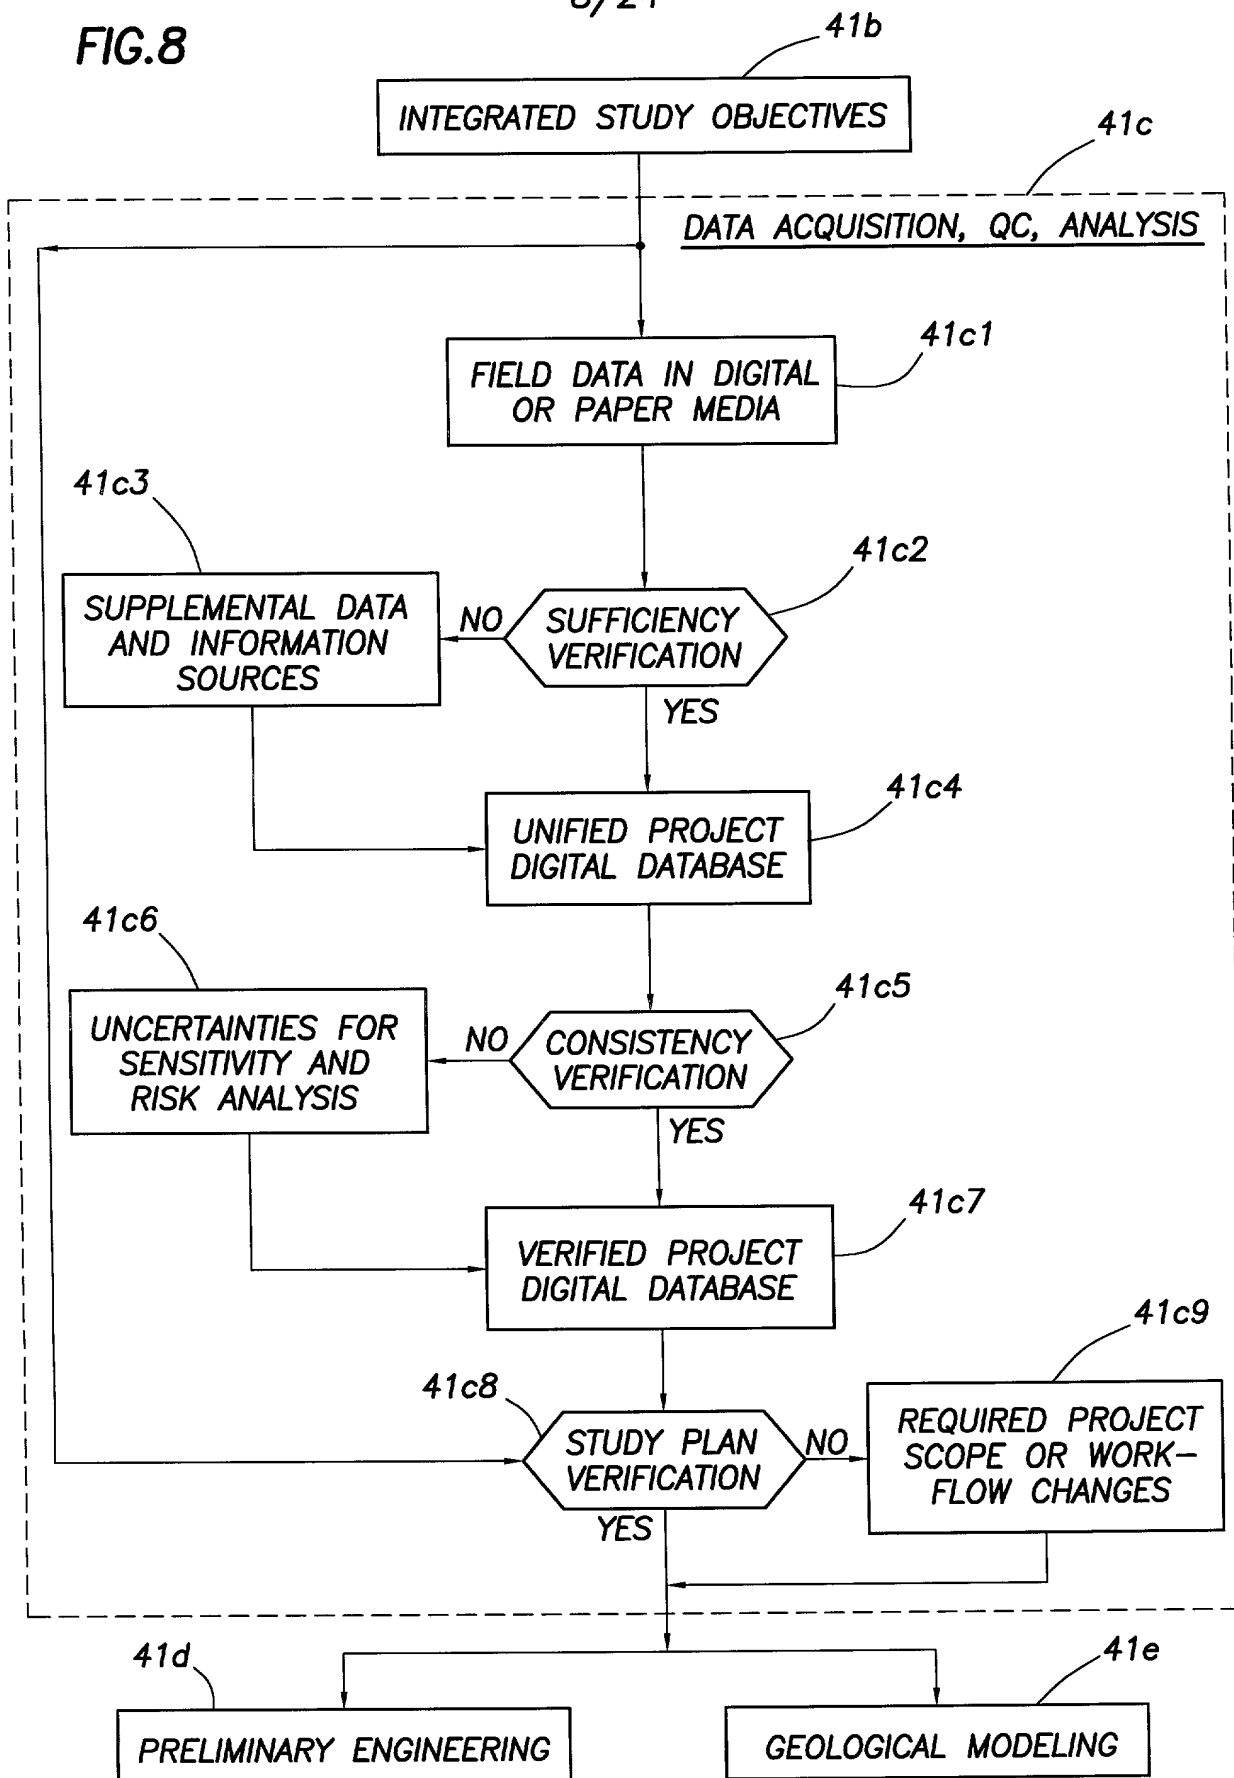

+

FIG.9A

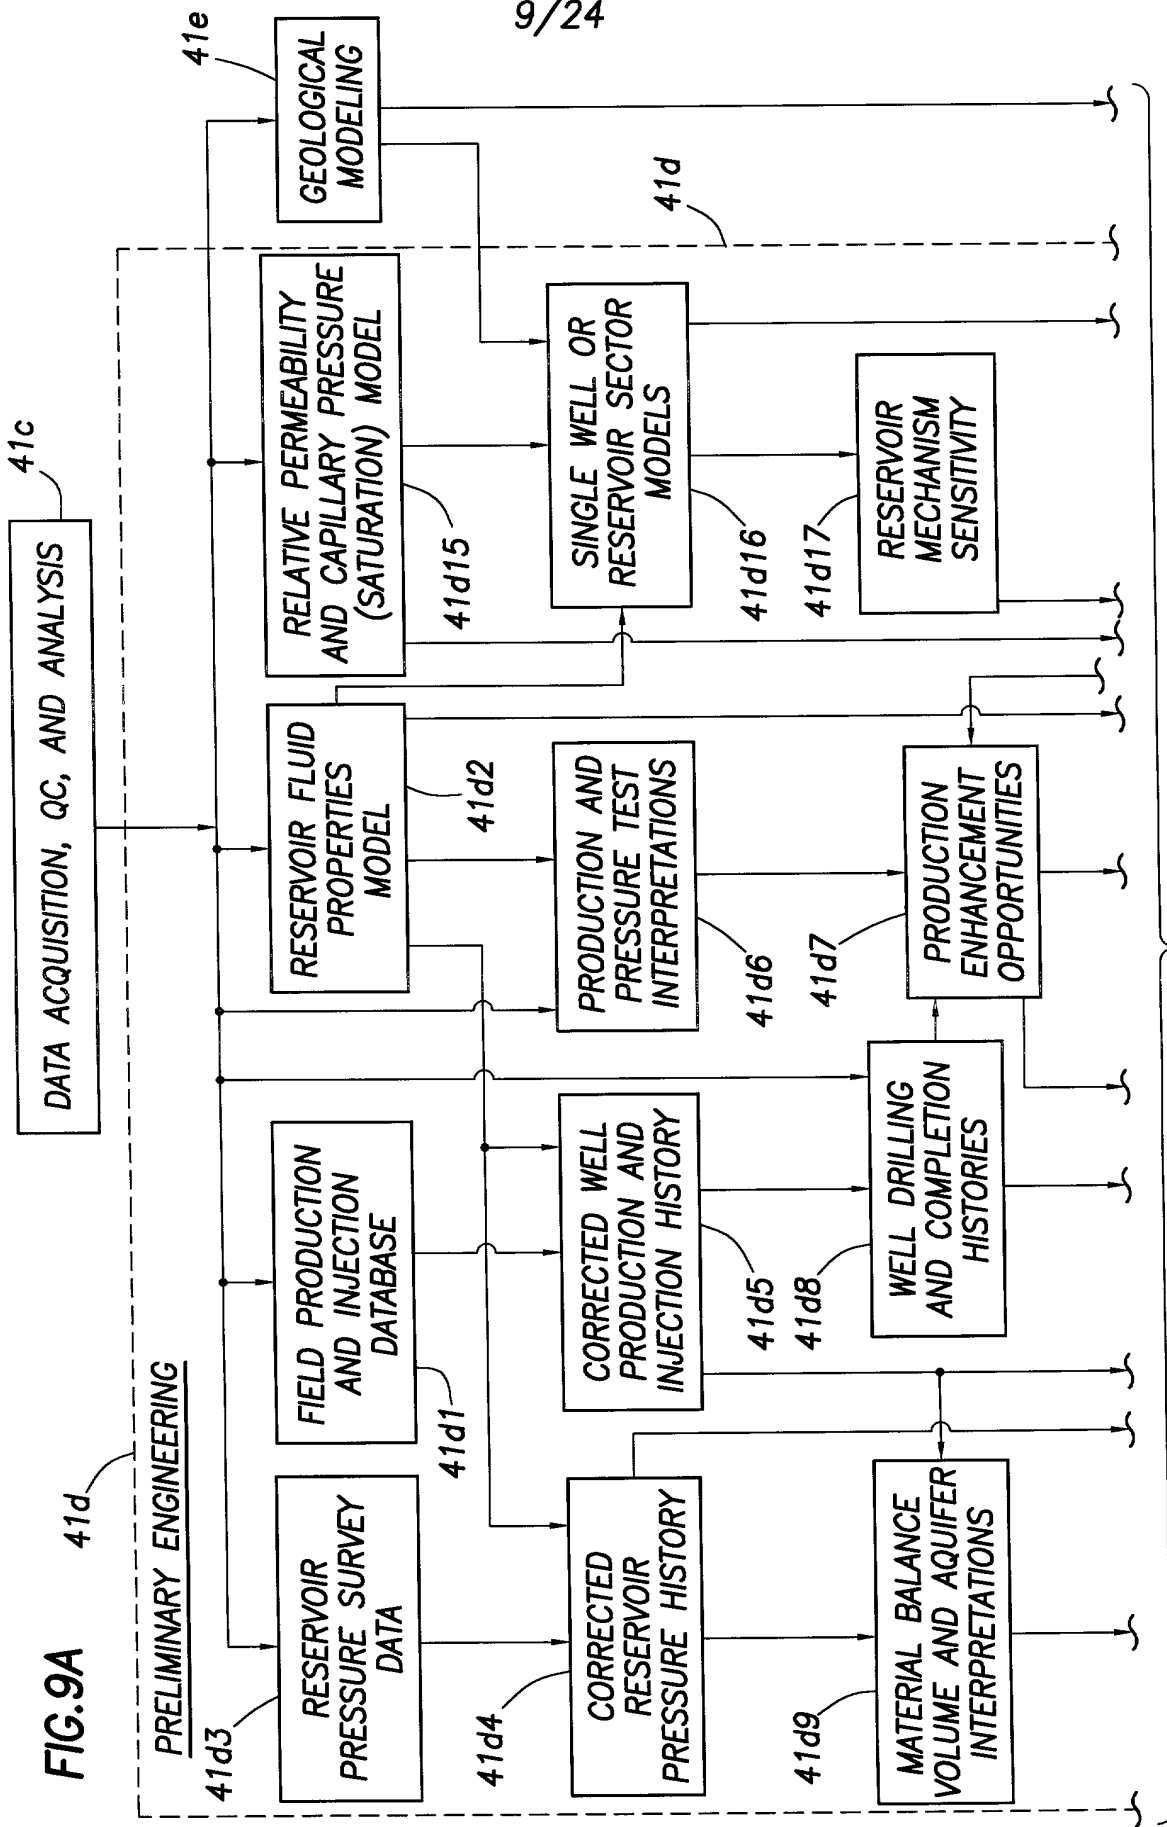


TO FIG.9B

+

+


10/24

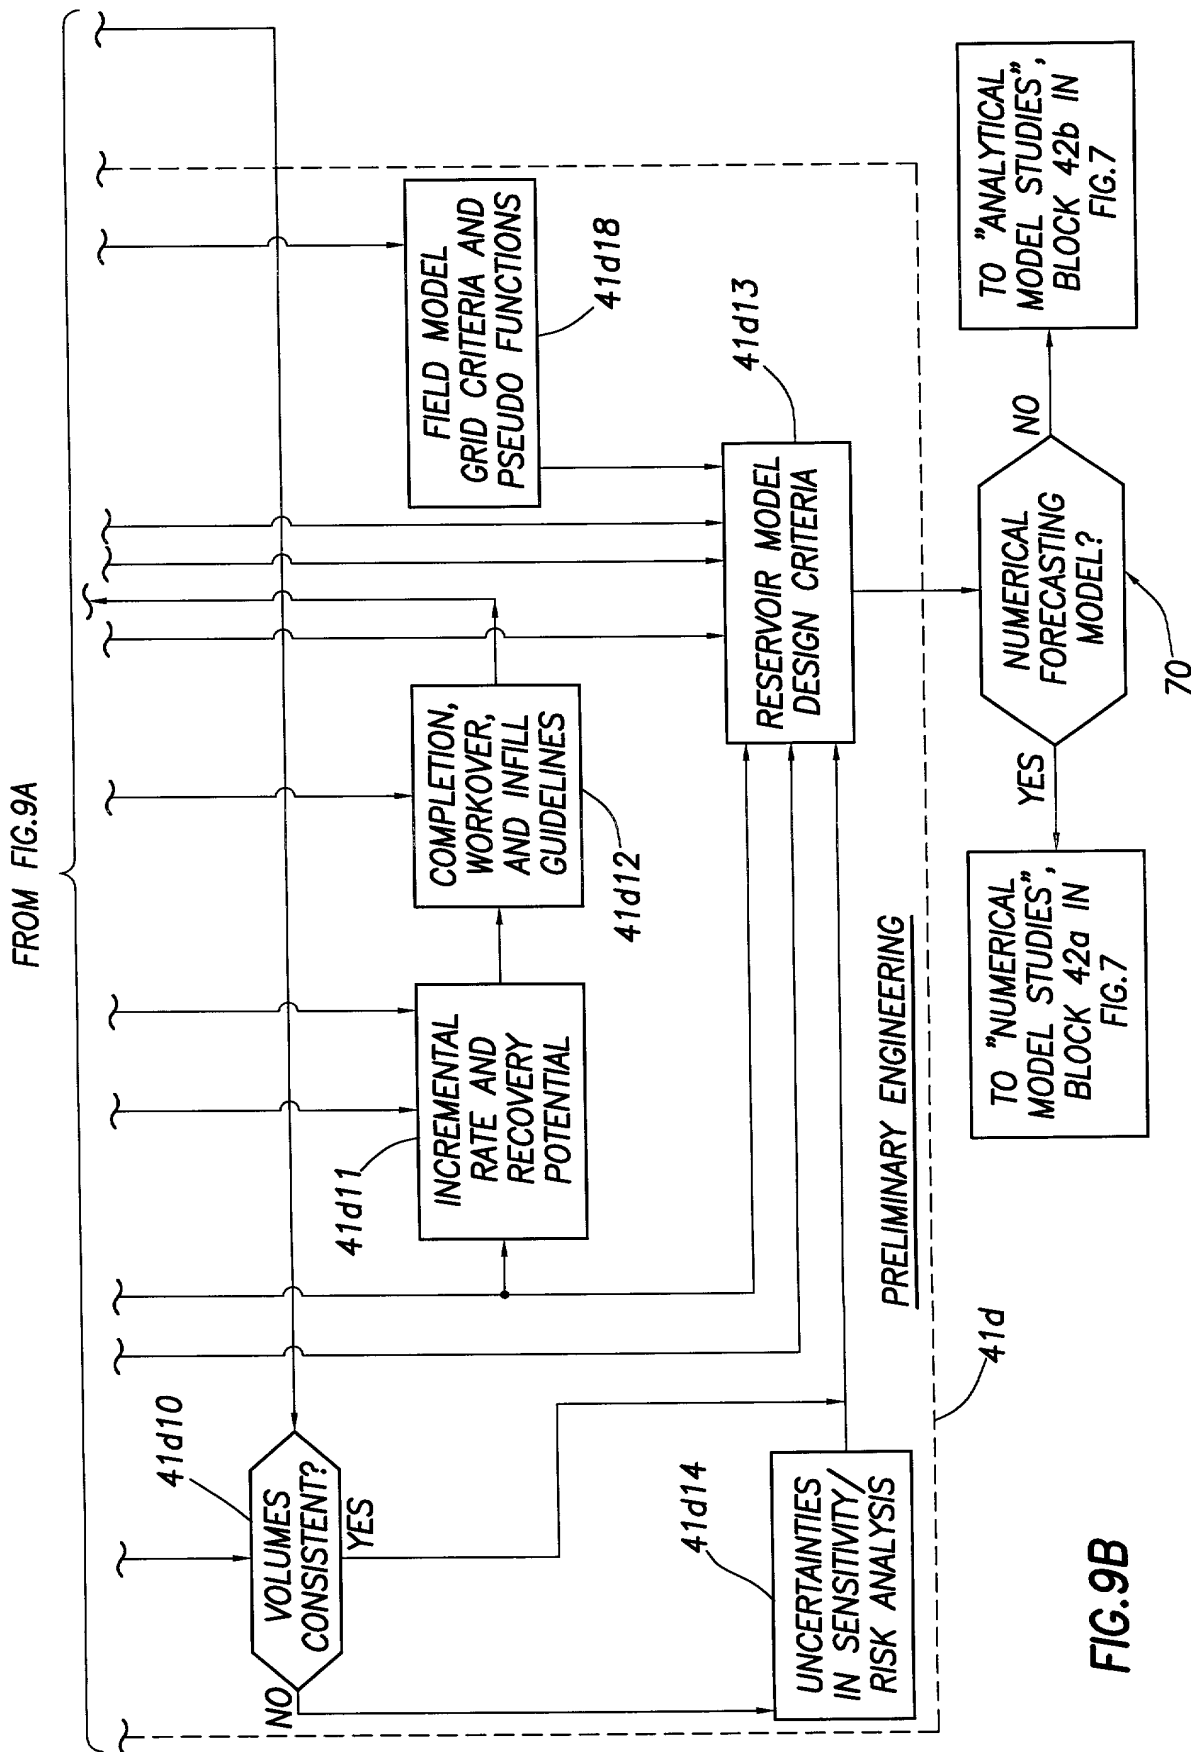

+

+

FIG. 10A

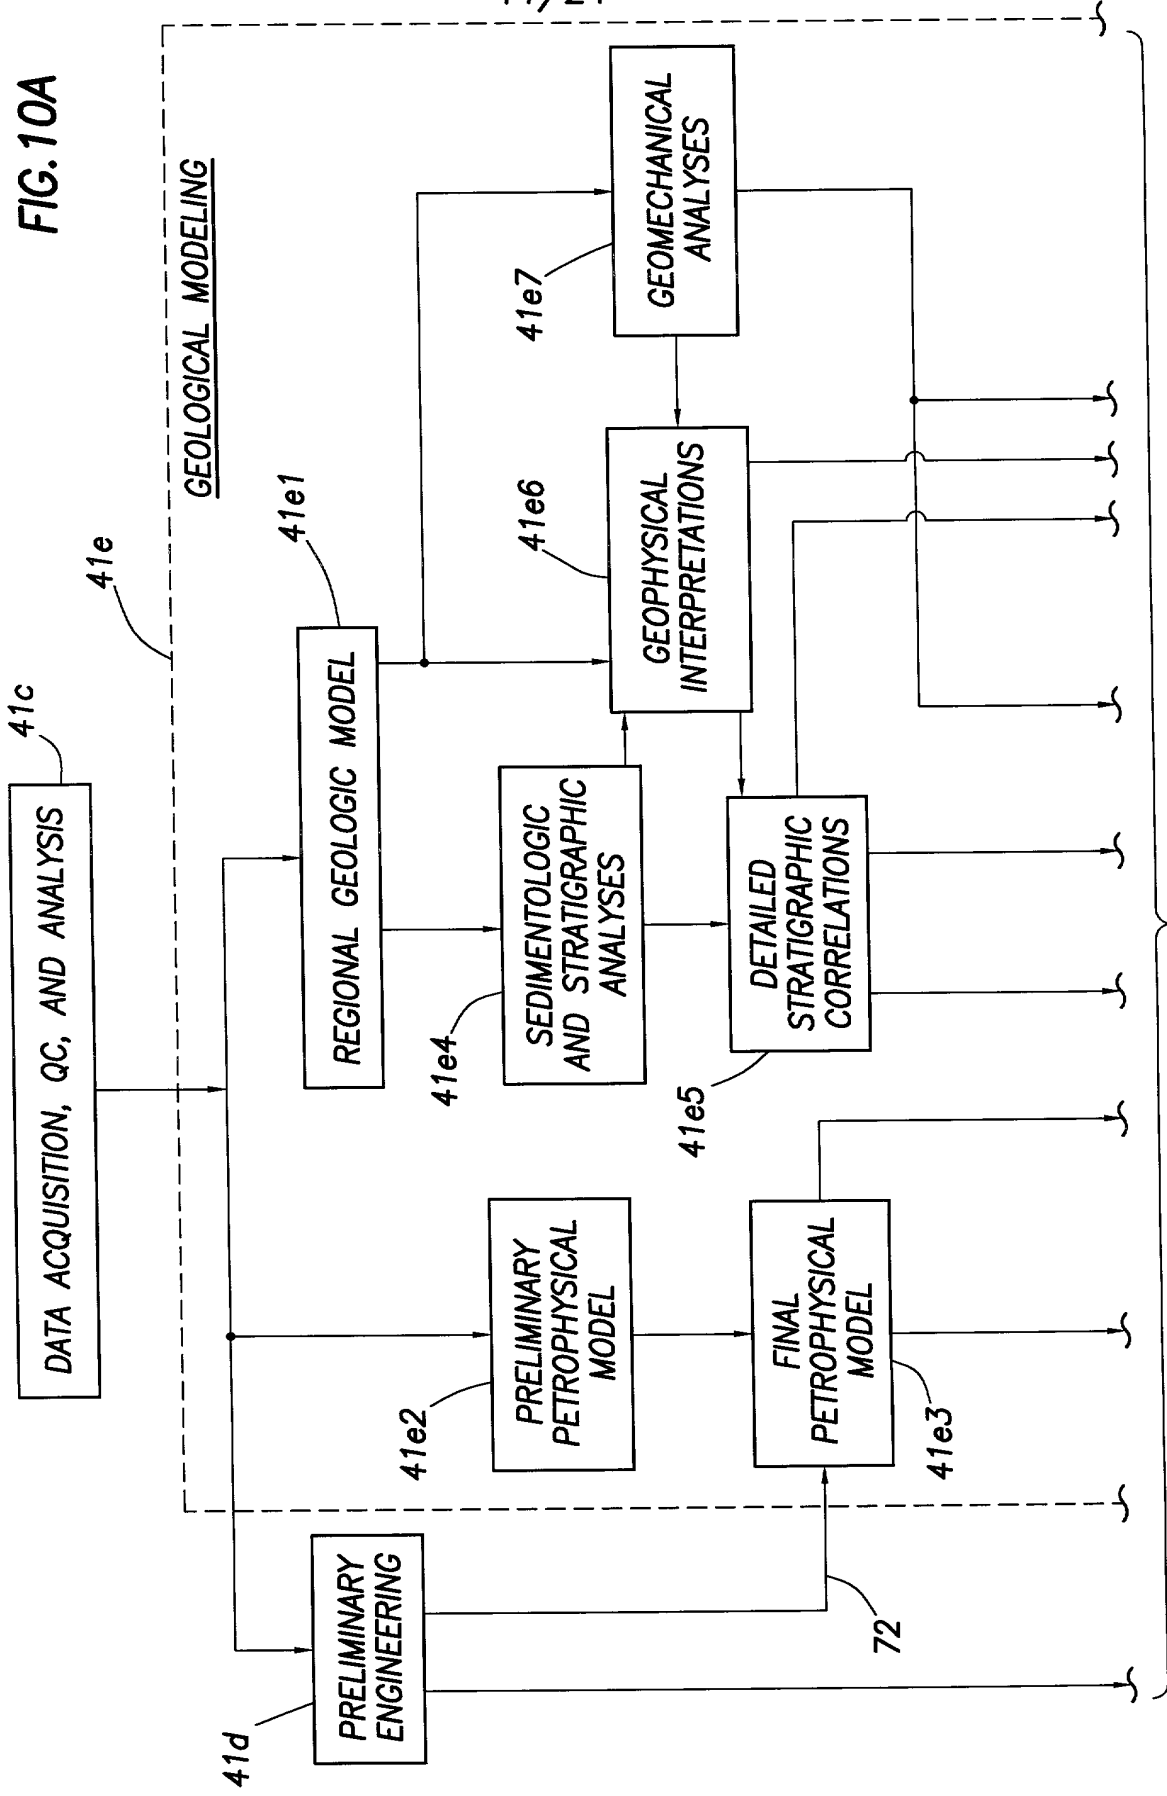

11/24

+

+


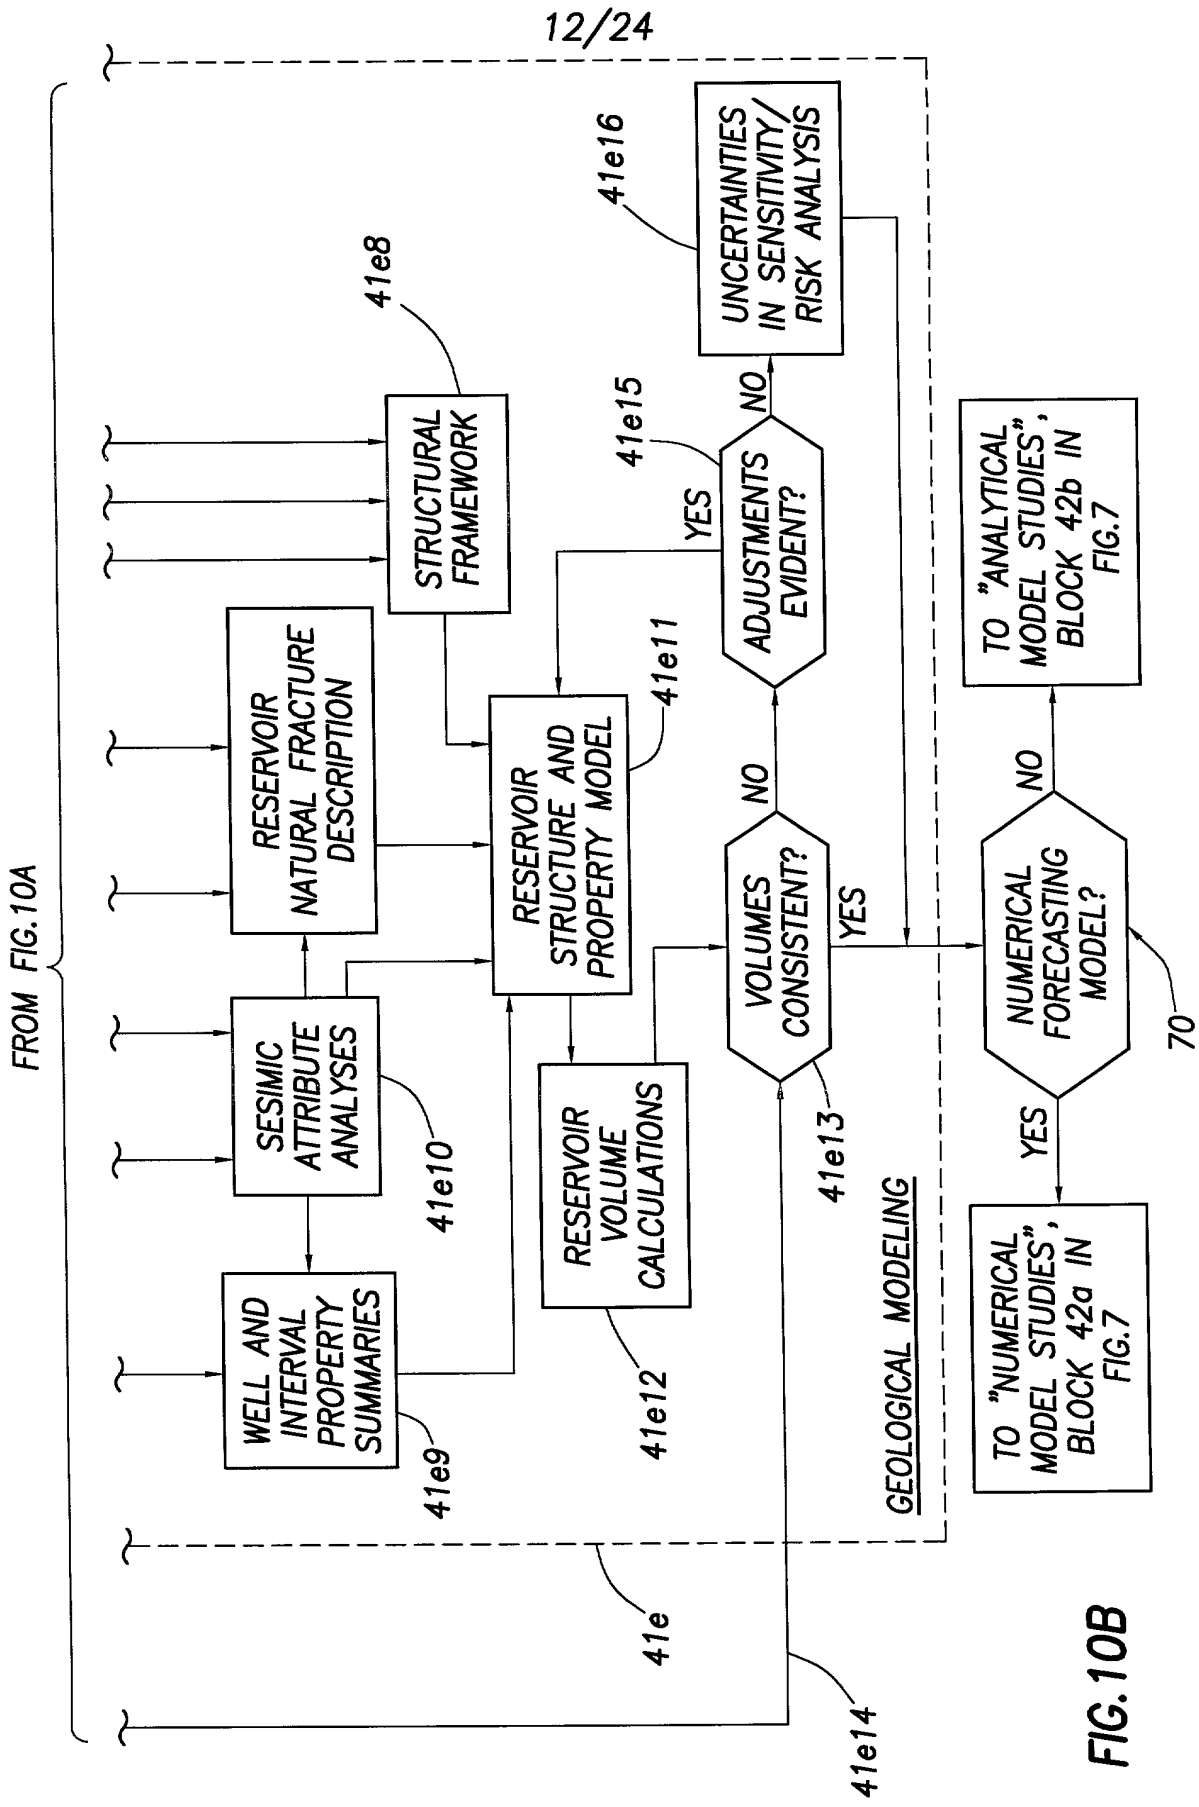


FIG. 10B

+

+

FIG. 11A

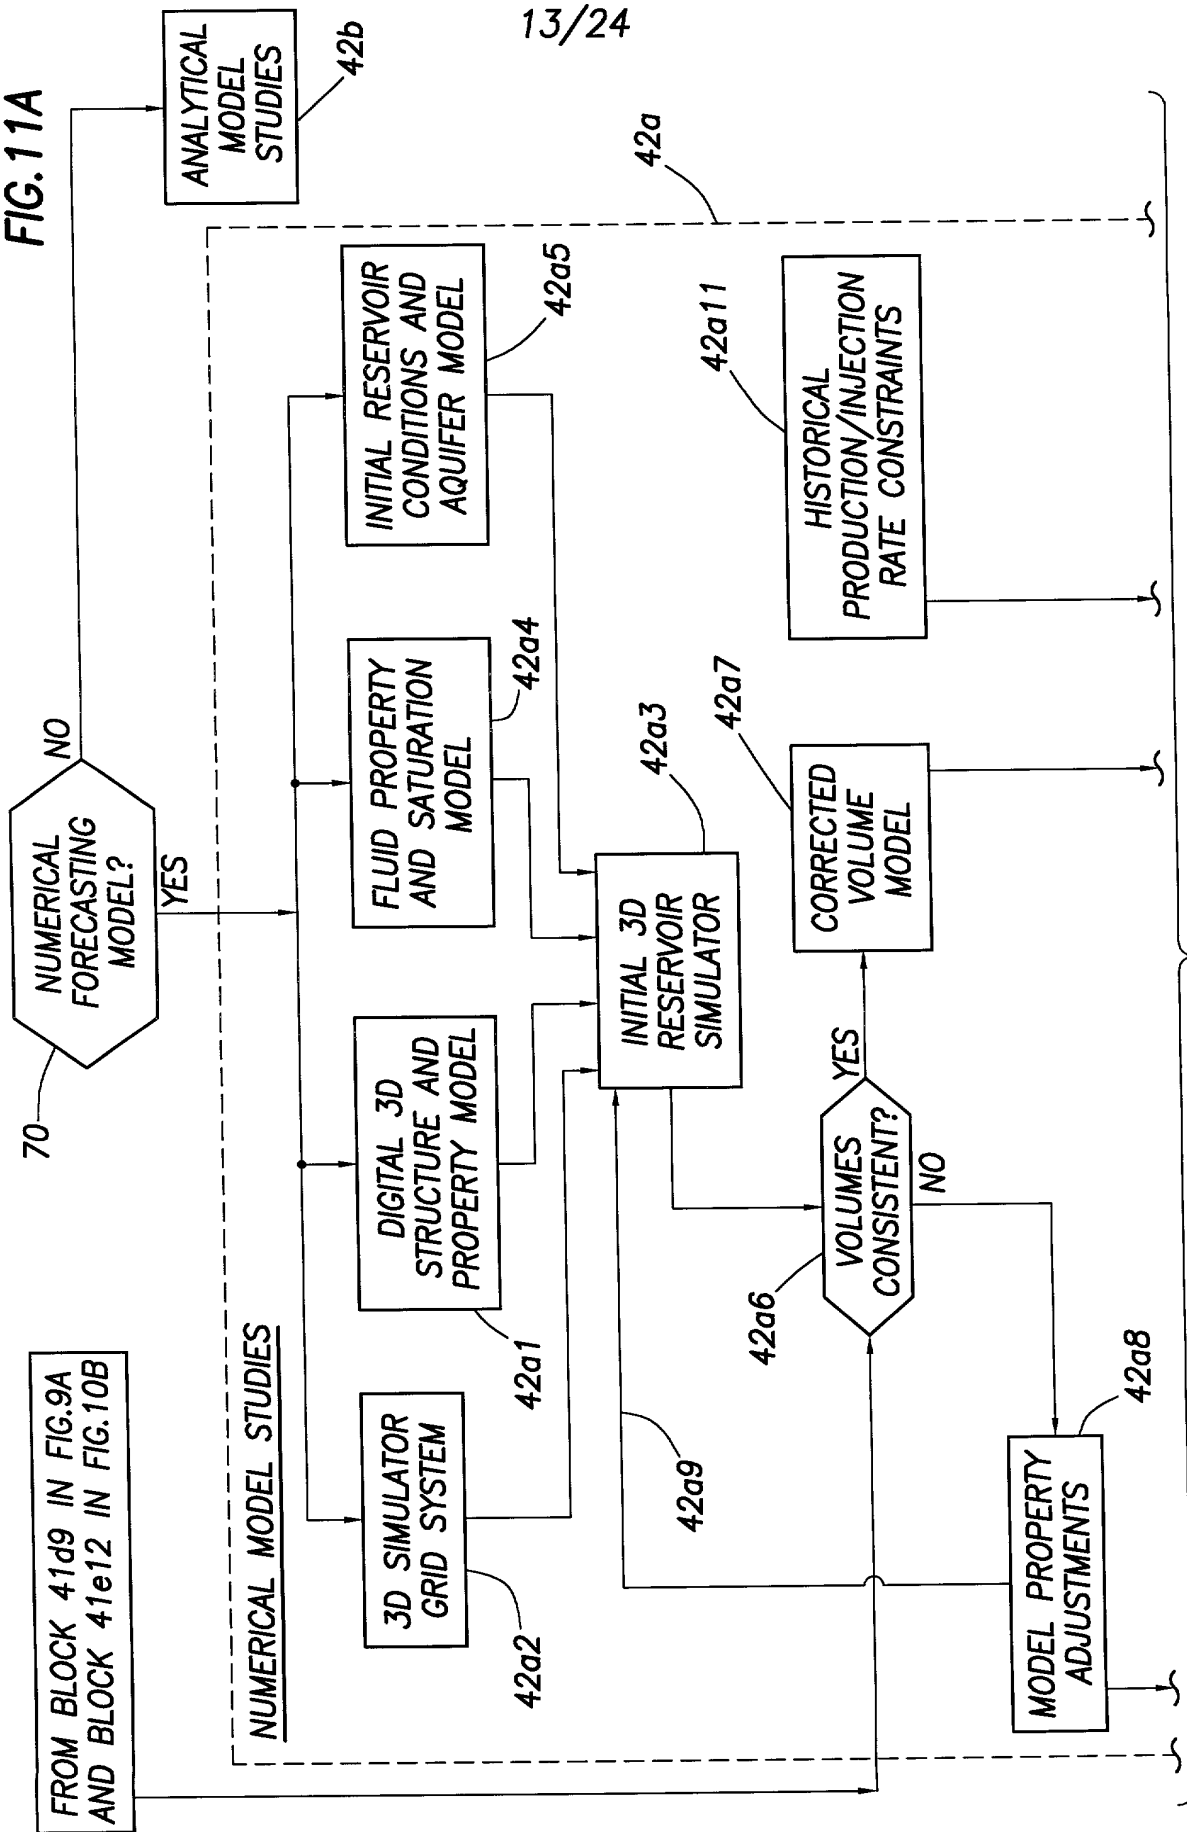

TO FIG. 11B

+

+


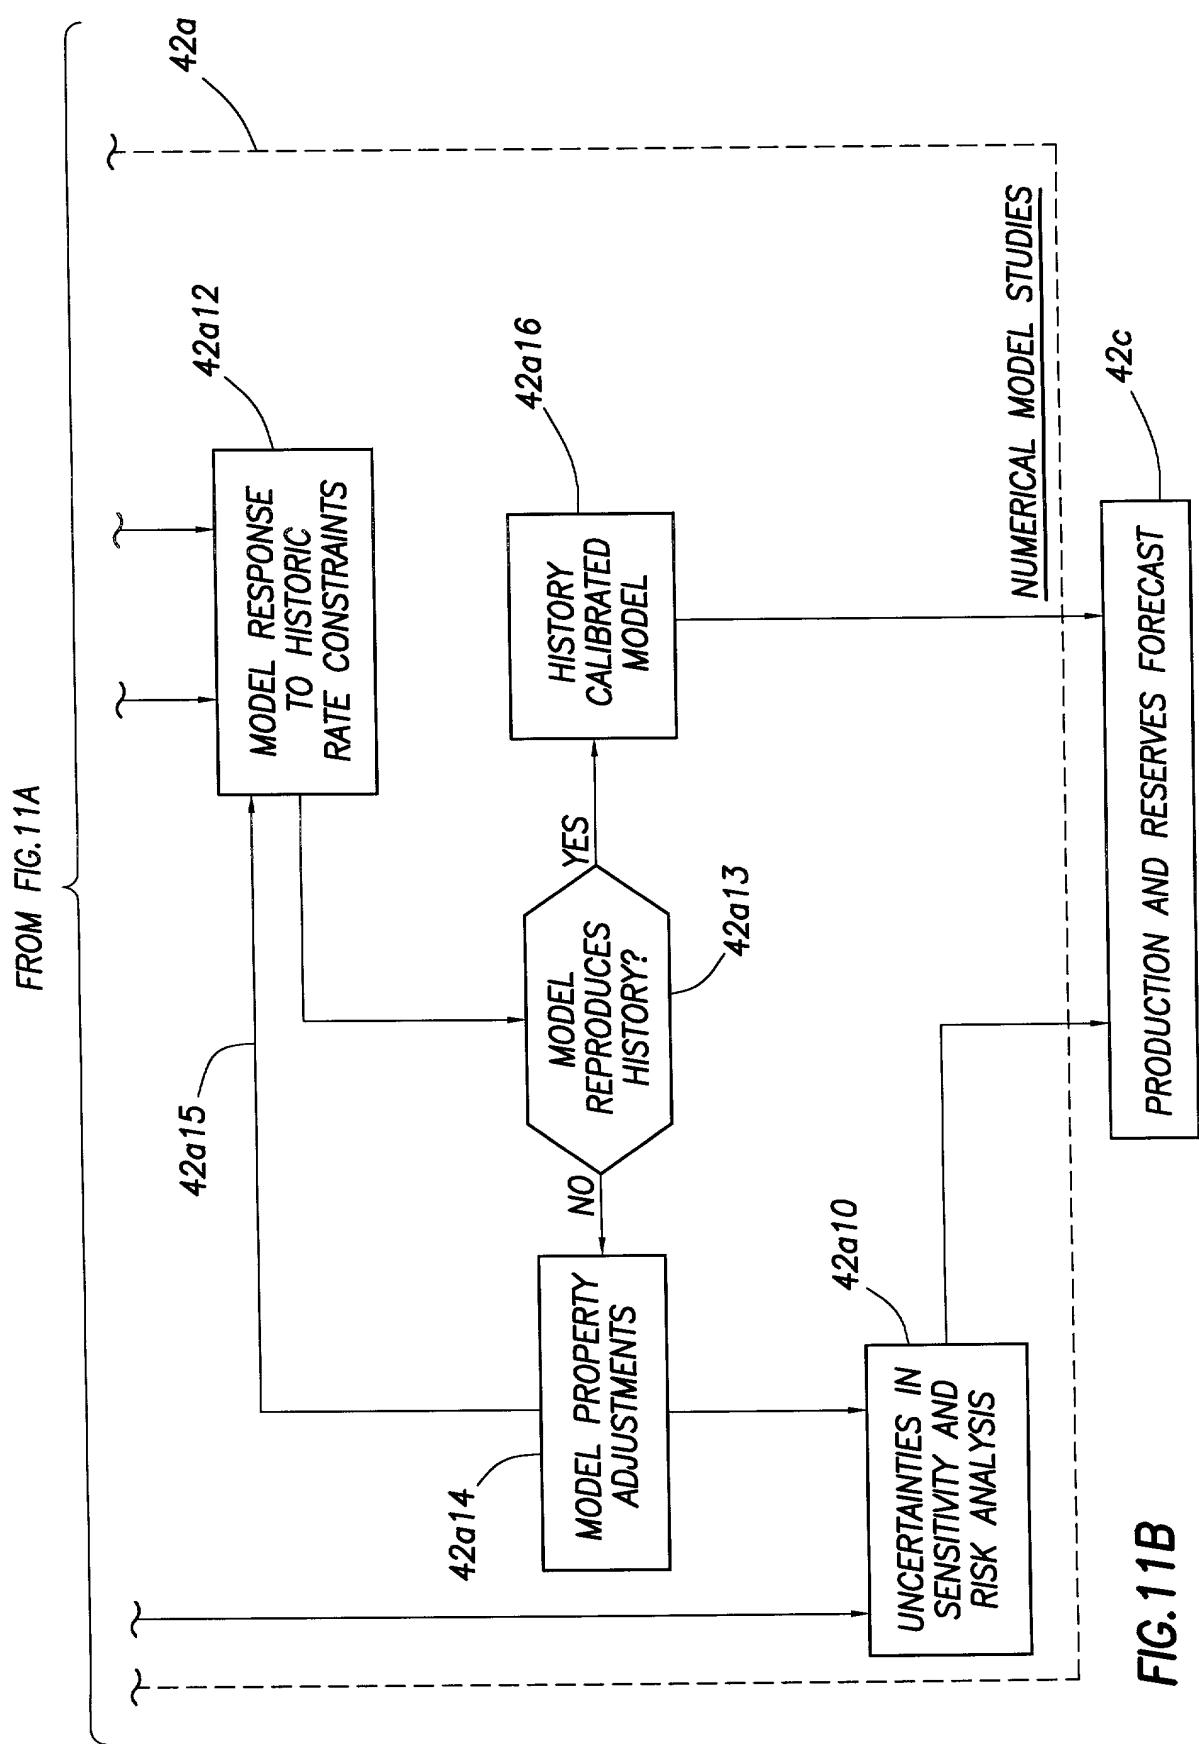


FIG.11B

+

FIG. 12A

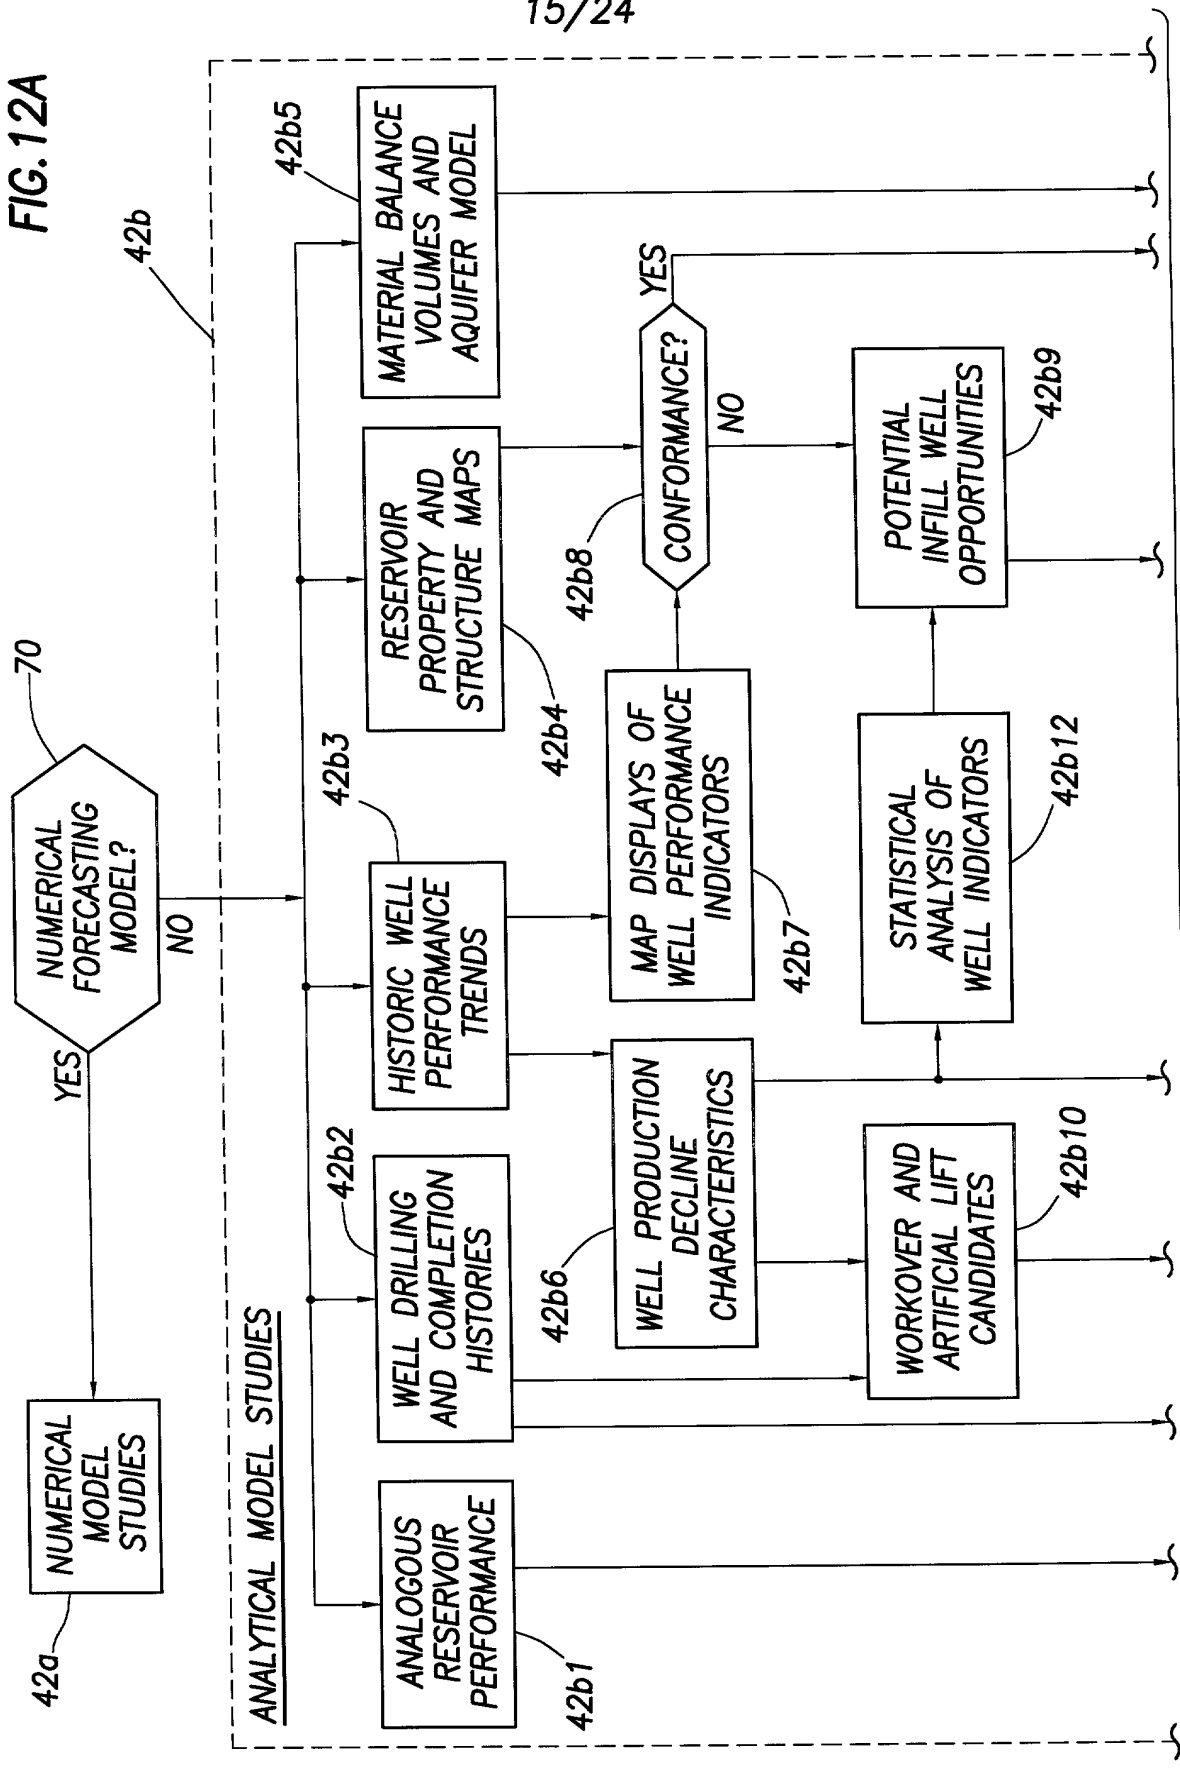

+

FROM FIG.12A

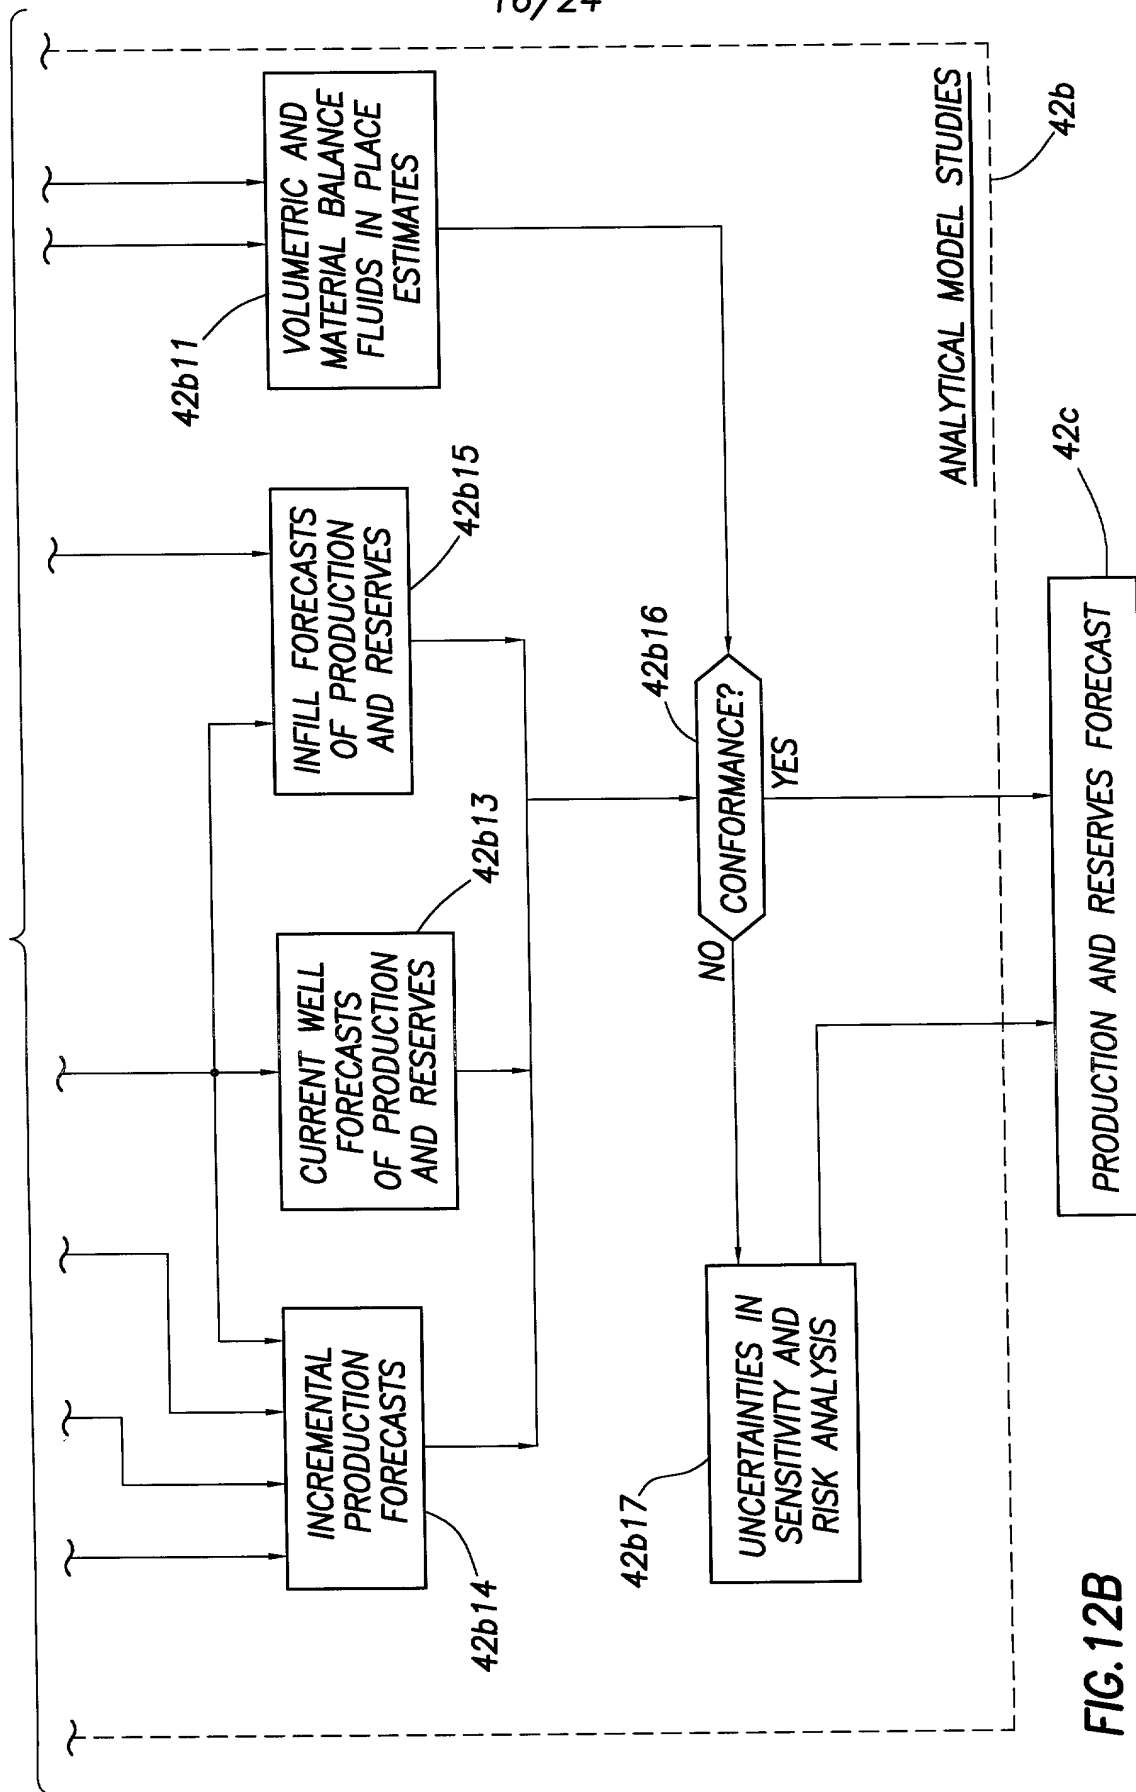


FIG.12B

+

+


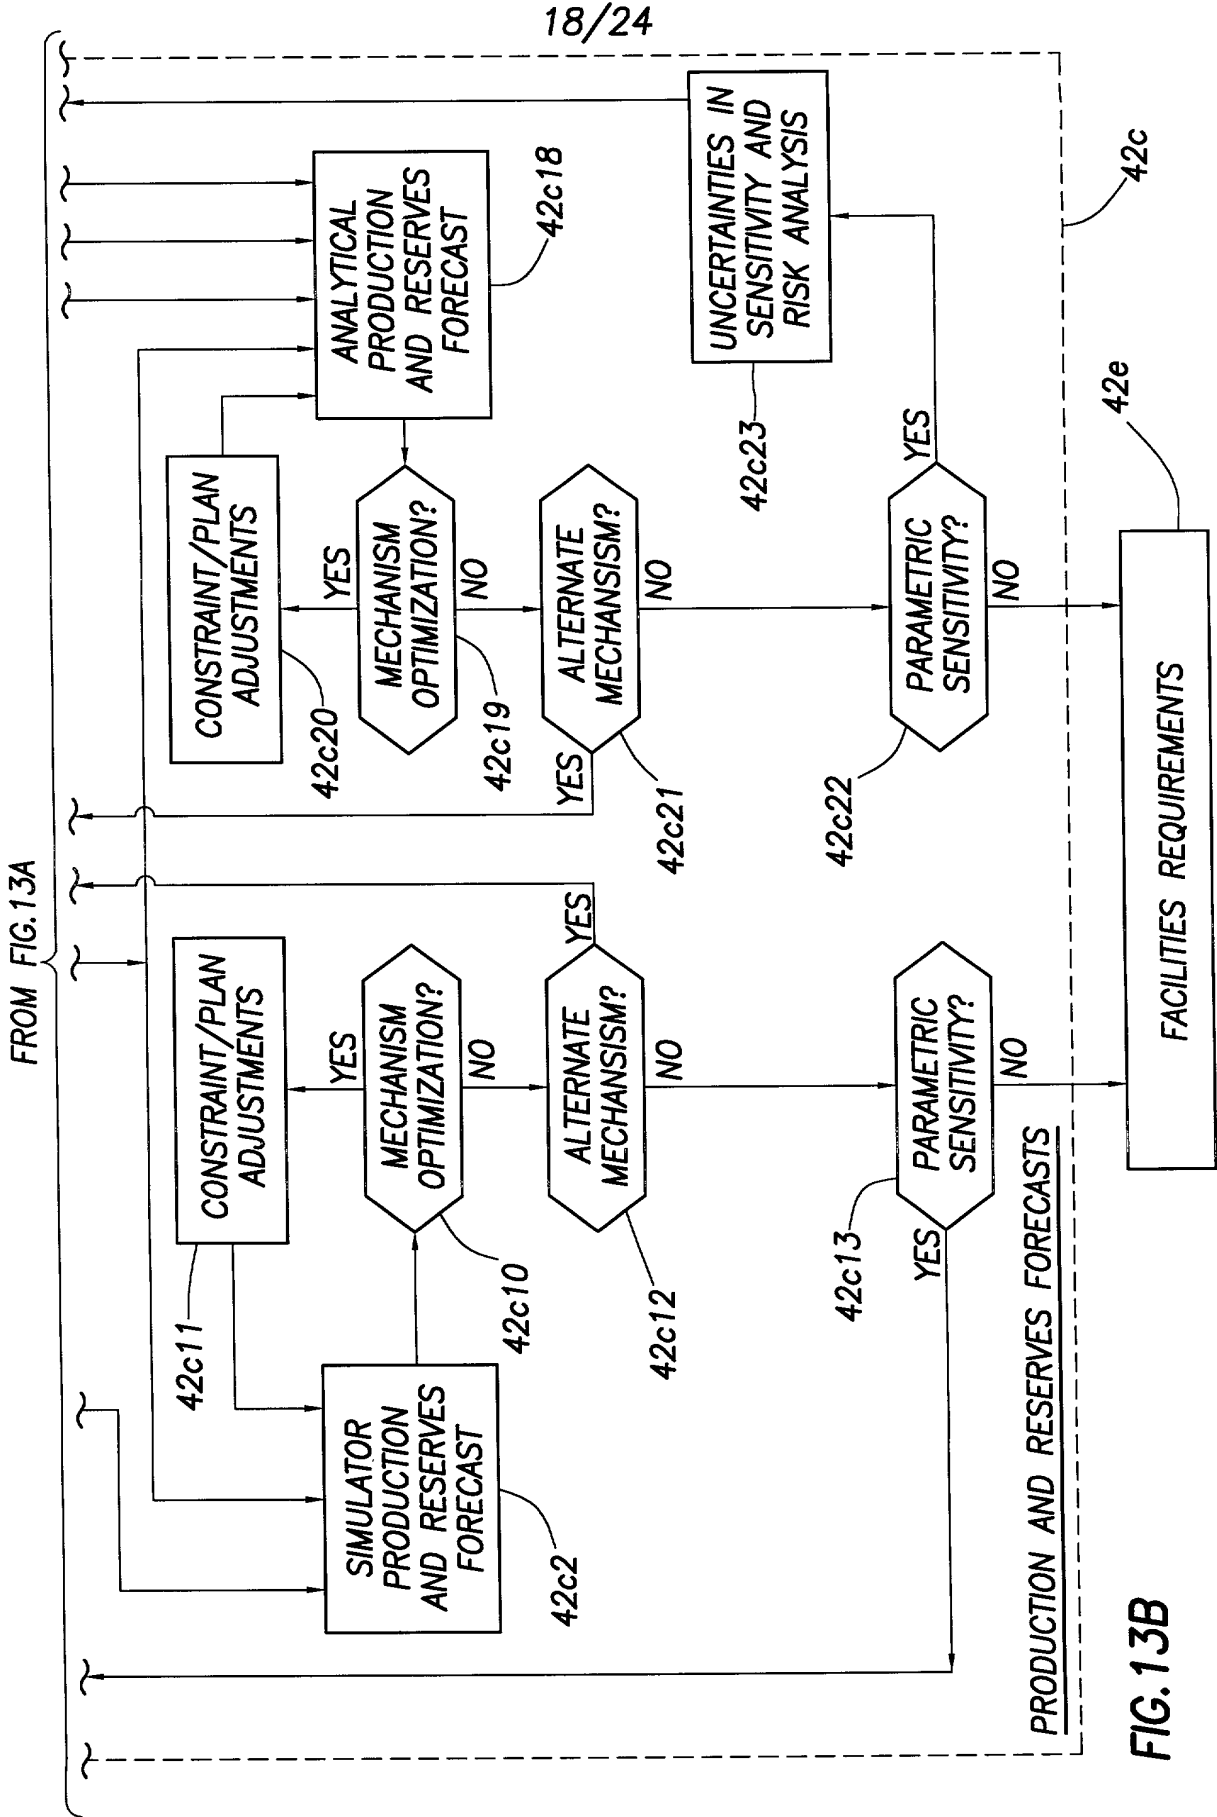


FIG. 13B

+


+

FIG. 14A

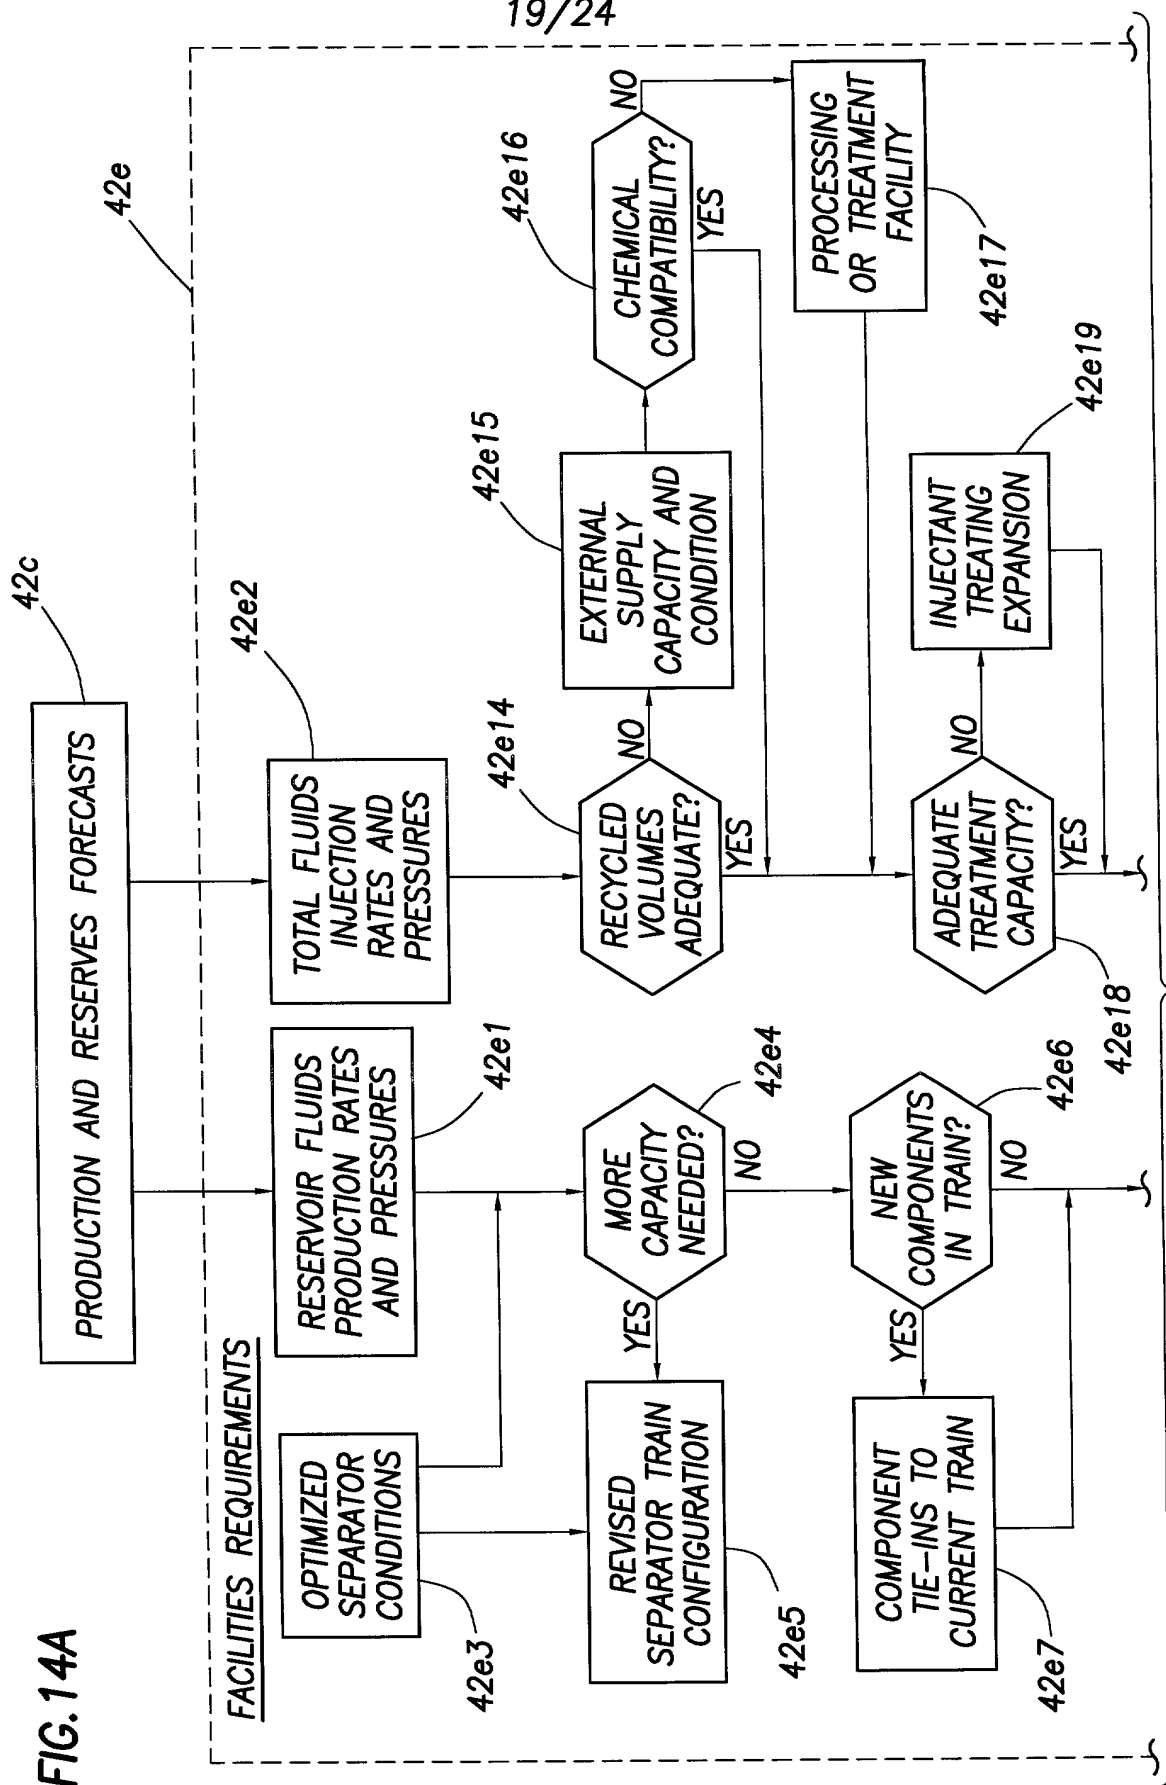

+


+

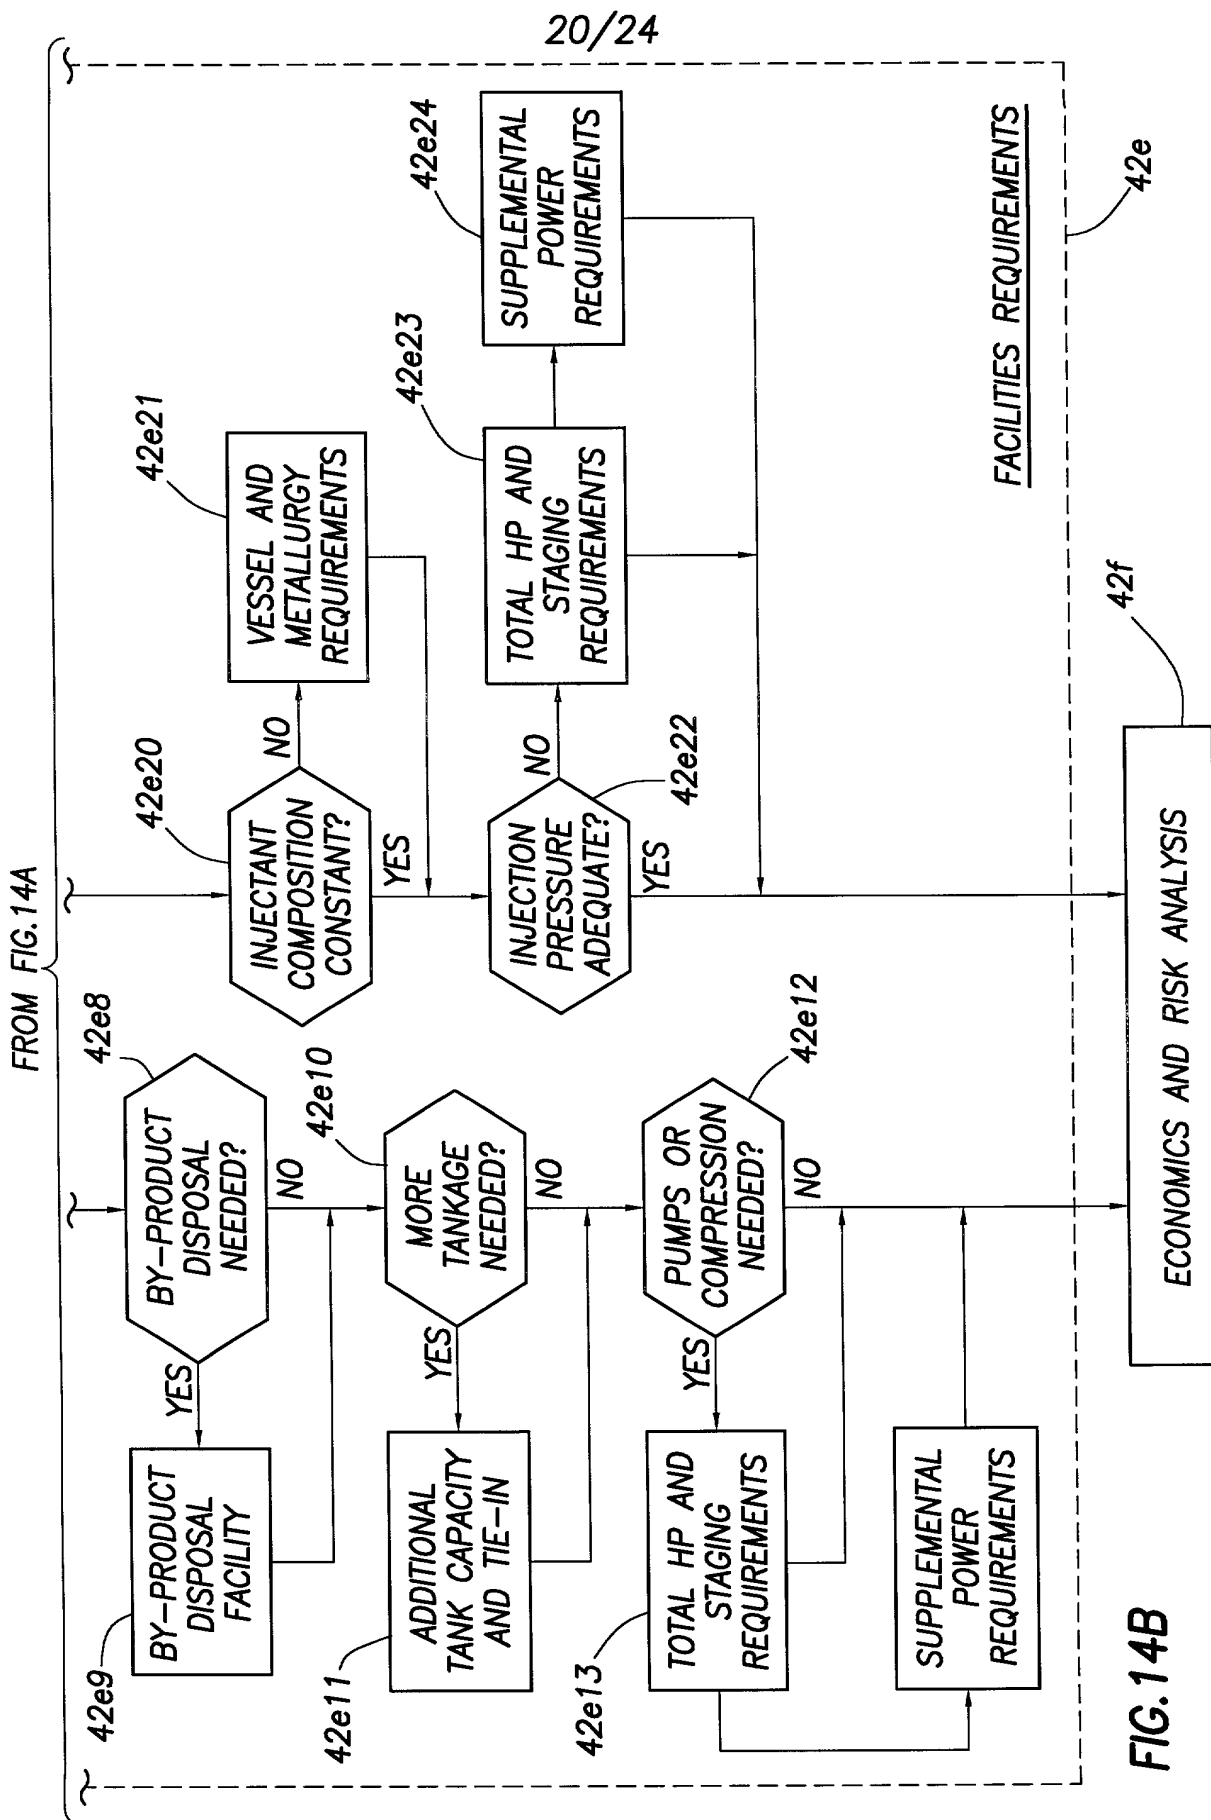

+

+

FIG. 15A

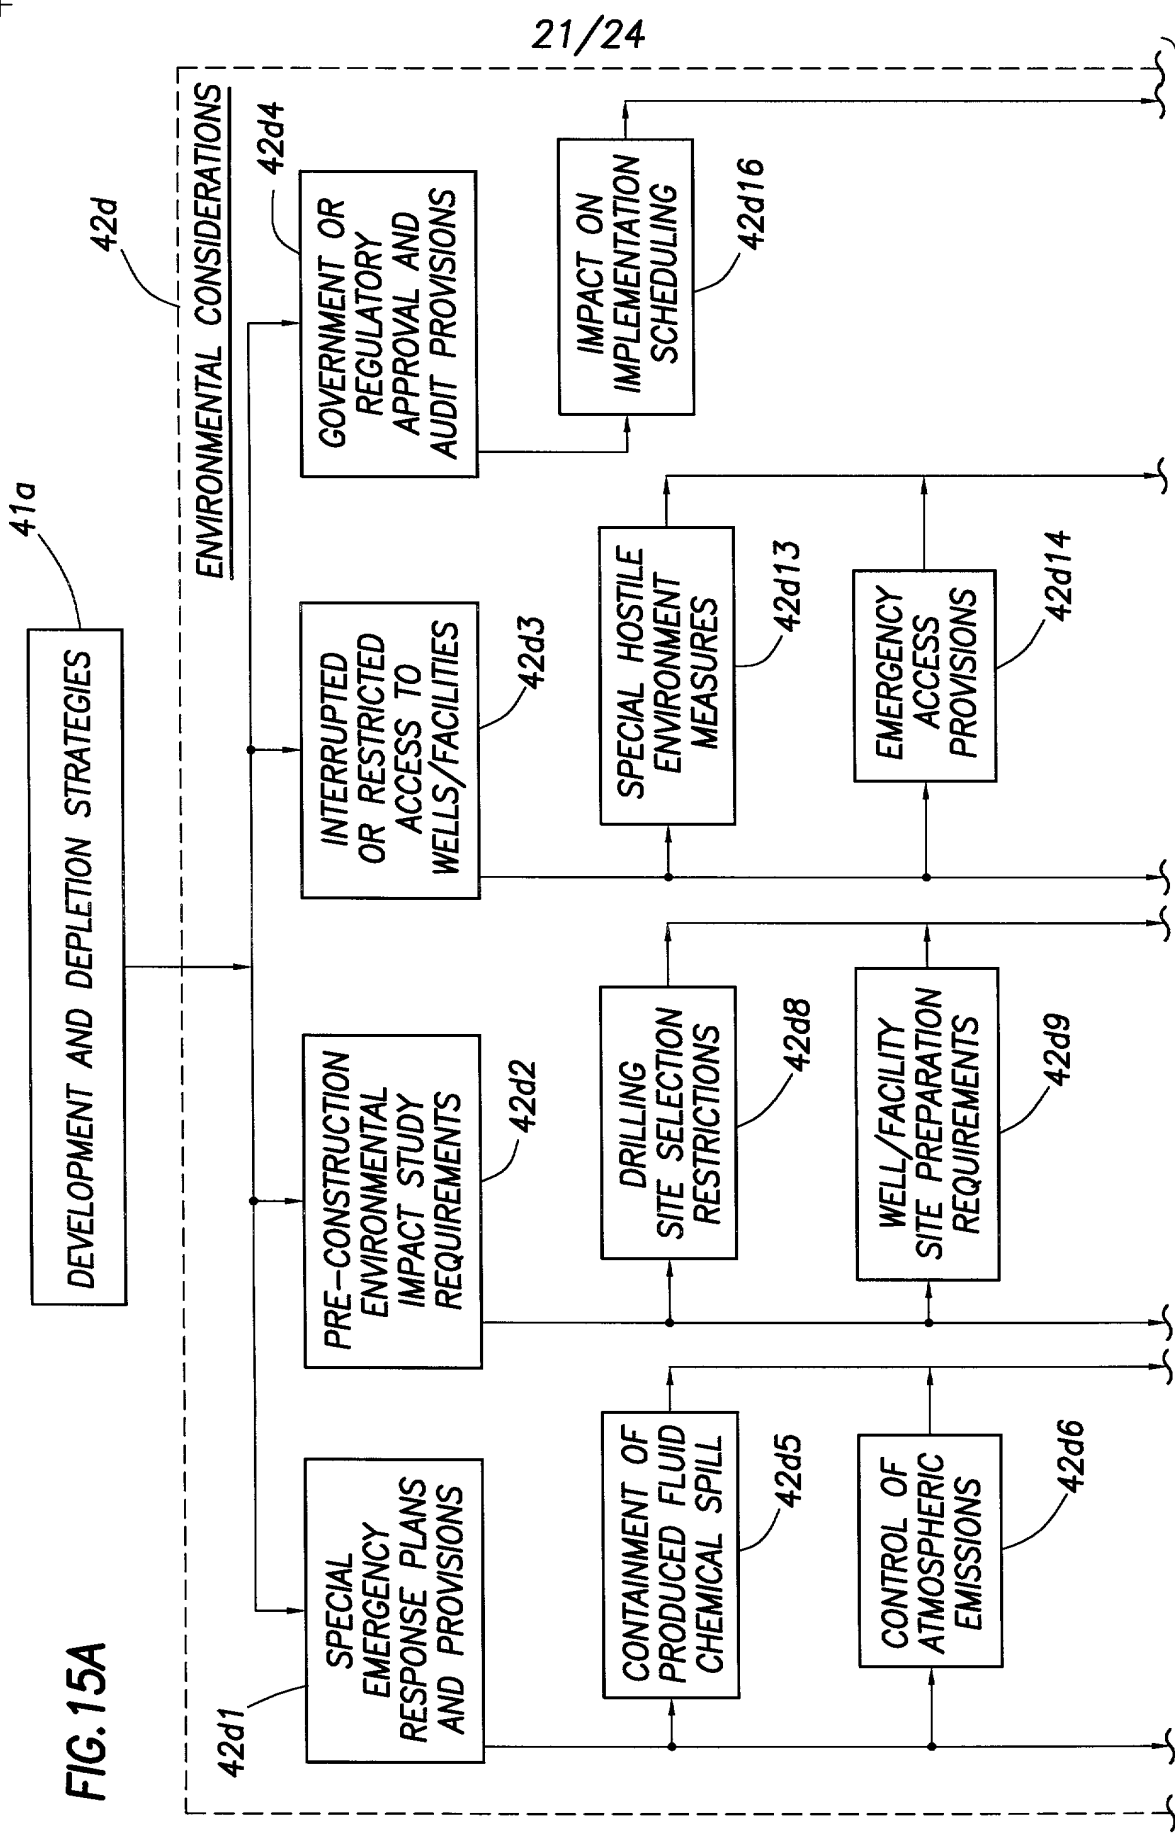

+

DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

INTEGRATED RESERVOIR OPTIMIZATION

the specification of which is attached hereto unless the following box is checked:

☐ was filed on _____ as United States Application Number or PCT International Application Number _____ and was amended on (if applicable) _____

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)		Priority Claimed
_____ (Number) (Country)	/ / D/ M / YR FILED	<input type="checkbox"/> YES <input type="checkbox"/> NO
_____ (Number) (Country)	/ / D/ M / YR FILED	<input type="checkbox"/> YES <input type="checkbox"/> NO

I hereby claim the benefit under Title 35, United States Code, section 119(e) of any United States provisional application(s) listed below

60/183,836

02/22/2000

(Application Number)

(Filing Date)

(Application Number)

(Filing Date)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became the filing date of the prior application and the national or PCT international filing date of this application:

(Application Number) (Filing Date) (status -- patented, pending abandoned)

(Application Number) (Filing Date) (status -- patented, pending abandoned)

I hereby appoint the following attorney(s) and/or agents(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

John H. Bouchard, #29,286 and John J. Ryberg, #31,134 and Dale Gaudier #28,213

I hereby request that all correspondence, notices, official letters and other communication be directed to: GeoQuest, a division of Schlumberger Technology Corporation, ATTN: J. H. Bouchard, Patent Counsel, 5599 San Felipe, Suite 1700, Houston, Texas 77056-2722 and that all telephone calls be directed to: John H. Bouchard, at (713) 513-2515, c/o GeoQuest, 5599 San Felipe, Suite 1700, Houston, Texas 77056-2722

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of First inventor (given name, family name) OMER M. GURPINAR

First Inventor's Signature



Date

8/21/2000

Residence: 452 Monroe Street, Denver, Colorado 80206

Citizenship: Canada

P.O. Address: 452 Monroe Street, Denver, Colorado 80206

[XXX] Additional inventors are being named on separately numbered sheets attached hereto.

Full name of Second inventor (given name, family name) **DAVID J. ROSSI**

Second Inventor's Signature _____ Date _____

Residence: 22506 Bridgehaven Drive, Katy, Texas 77494 **Citizenship:** U.S.A.

P.O. Address: 22506 Bridgehaven Drive, Katy, Texas 77494

Full name of Third inventor (given name, family name) **VIDYA B. VERMA**

Third Inventor's Signature _____ Date _____

Residence: 4618 Jamaica Drive, Sugar Land, Texas 77479 **Citizenship:** U.S.A.

P.O. Address: 4618 Jamaica Drive, Sugar Land, Texas 77479

Full name of Fourth inventor (given name, family name) **PHILIP W. PANTELLA**

Fourth Inventor's Signature _____ Date _____

Residence: 9031 33rd Ave N.W. Calgary, Alberta, Canada T3B 1M2 **Citizenship:** Canada

P.O. Address: 9031 33rd Ave N.W. Calgary, Alberta, Canada T3B 1M2

DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

INTEGRATED RESERVOIR OPTIMIZATION

the specification of which is attached hereto unless the following box is checked:

☐ was filed on _____ as United States Application Number or PCT International Application Number _____ and was amended on (if applicable) _____

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)	Priority Claimed
_____ (Number) (Country)	/ / D/ M / YR FILED <input type="checkbox"/> YES <input type="checkbox"/> NO
_____ (Number) (Country)	/ / D/ M / YR FILED <input type="checkbox"/> YES <input type="checkbox"/> NO

I hereby claim the benefit under Title 35, United States Code, section 119(e) of any United States provisional application(s) listed below

60/183,836 _____ (Application Number)	02/22/2000 _____ (Filing Date)
_____ (Application Number)	_____ (Filing Date)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became the filing date of the prior application and the national or PCT international filing date of this application:

_____ (Application Number)	_____ (Filing Date)	_____ (status -- patented, pending abandoned)
_____ (Application Number)	_____ (Filing Date)	_____ (status -- patented, pending abandoned)

I hereby appoint the following attorney(s) and/or agents(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

John H. Bouchard, #29,286 and John J. Ryberg, #31,134 and Dale Gaudier #28,213

I hereby request that all correspondence, notices, official letters and other communication be directed to: GeoQuest, a division of Schlumberger Technology Corporation, ATTN: J. H. Bouchard, Patent Counsel, 5599 San Felipe, Suite 1700, Houston, Texas 77056-2722 and that all telephone calls be directed to: John H. Bouchard, at (713) 513-2515, c/o GeoQuest, 5599 San Felipe, Suite 1700, Houston, Texas 77056-2722

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of First inventor (given name, family name) **OMER M. GURPINAR**

First Inventor's Signature _____ Date _____

Residence: 452 Monroe Street, Denver, Colorado 80206 **Citizenship:** Canada

P.O. Address: 452 Monroe Street, Denver, Colorado 80206

[XXX] Additional inventors are being named on separately numbered sheets attached hereto.

Full name of Second inventor (given name, family name) **DAVID J. ROSSI**

Second Inventor's Signature David J Rossi Date 14 August 2000

Residence: 22506 Bridgehaven Drive, Katy, Texas 77494 **Citizenship:** U.S.A.

P.O. Address: 22506 Bridgehaven Drive, Katy, Texas 77494

Full name of Third inventor (given name, family name) **VIDYA B. VERMA**

Third Inventor's Signature _____ Date _____

Residence: 4618 Jamaica Drive, Sugar Land, Texas 77479 **Citizenship:** U.S.A.

P.O. Address: 4618 Jamaica Drive, Sugar Land, Texas 77479

Full name of Fourth inventor (given name, family name) **PHILIP W. PANTELLA**

Fourth Inventor's Signature _____ Date _____

Residence: 9031 33rd Ave N.W. Calgary, Alberta, Canada T3B 1M2 **Citizenship:** Canada

P.O. Address: 9031 33rd Ave N.W. Calgary, Alberta, Canada T3B 1M2

[illegible]

My residence, post office address and citizenship are as stated below next to my name.

INTEGRATED RESERVOIR OPTIMIZATION

[] was filed on _____ as United States Application Number or PCT International Application Number _____ and was amended on (if applicable) _____

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having filing date before that of the application on which priority is claimed:

Priority Claimed

/ /
D/ M / YR FILED

☐ YES ☐ NO

/ /
D/M/YR FILED

☐ YES ☐ NO

I hereby claim the benefit under Title 35, United States Code, section 119(e) of any United States provisional application(s) listed below

02/22/2000

(Filing Date)

(Filing Date)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became the filing date of the prior application and the national or PCT international filing date of this application:

_____ (Application Number)	_____ (Filing Date)	_____ (status -- patented, pending abandoned)
-------------------------------	------------------------	--

_____ (Application Number)	_____ (Filing Date)	_____ (status -- patented, pending abandoned)
-------------------------------	------------------------	--

I hereby appoint the following attorney(s) and/or agents(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

John H. Bouchard, #29,286 and John J. Ryberg, #31,134 and Dale Gaudier #28,213

I hereby request that all correspondence, notices, official letters and other communication be directed to: GeoQuest, a division of Schlumberger Technology Corporation, ATTN: J. H. Bouchard, Patent Counsel, 5599 San Felipe, Suite 1700, Houston, Texas 77056-2722 and that all telephone calls be directed to: John H. Bouchard, at (713) 513-2515, c/o GeoQuest, 5599 San Felipe, Suite 1700, Houston, Texas 77056-2722

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of First inventor (given name, family name) **OMER M. GURPINAR**

First Inventor's Signature _____ Date _____

Residence: 452 Monroe Street, Denver, Colorado 80206 **Citizenship:** Canada

P.O. Address: 452 Monroe Street, Denver, Colorado 80206

[XXX] Additional inventors are being named on separately numbered sheets attached hereto.

Full name of Second inventor (given name, family name) **DAVID J. ROSSI**

Second Inventor's Signature _____ Date _____

Residence: 22506 Bridgehaven Drive, Katy, Texas 77494 **Citizenship:** U.S.A.

P.O. Address: 22506 Bridgehaven Drive, Katy, Texas 77494

Full name of Third inventor (given name, family name) **VIDYA B. VERMA**

Third Inventor's Signature  Date August 11, 2008

Residence: 4618 Jamaica Drive, Sugar Land, Texas 77479 **Citizenship:** U.S.A.

P.O. Address: 4618 Jamaica Drive, Sugar Land, Texas 77479

Full name of Fourth inventor (given name, family name) **PHILIP W. PANTELLA**

Fourth Inventor's Signature _____ Date _____

Residence: 9031 33rd Ave N.W. Calgary, Alberta, Canada T3B 1M2 **Citizenship:** Canada

P.O. Address: 9031 33rd Ave N.W. Calgary, Alberta, Canada T3B 1M2

DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

INTEGRATED RESERVOIR OPTIMIZATION

the specification of which is attached hereto unless the following box is checked:

☐ was filed on _____ as United States Application Number or PCT International Application Number _____ and was amended on (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)		Priority Claimed
_____	/ /	<input type="checkbox"/> YES <input type="checkbox"/> NO
(Number) (Country)	D/ M / YR FILED	

_____	/ /	<input type="checkbox"/> YES <input type="checkbox"/> NO
(Number) (Country)	D/ M / YR FILED	

I hereby claim the benefit under Title 35, United States Code, section 119(e) of any United States provisional application(s) listed below

60/183,836

02/22/2000

(Application Number)

(Filing Date)

(Application Number)

(Filing Date)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became the filing date of the prior application and the national or PCT international filing date of this application:

_____	_____	_____
(Application Number)	(Filing Date)	(status -- patented, pending abandoned)

_____	_____	_____
(Application Number)	(Filing Date)	(status -- patented, pending abandoned)

I hereby appoint the following attorney(s) and/or agents(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

John H. Bouchard, #29,286 and John J. Ryberg, #31,134 and Dale Gaudier #28,213

I hereby request that all correspondence, notices, official letters and other communication be directed to: GeoQuest, a division of Schlumberger Technology Corporation, ATTN: J. H. Bouchard, Patent Counsel, 5599 San Felipe, Suite 1700, Houston, Texas 77056-2722 and that all telephone calls be directed to: John H. Bouchard, at (713) 513-2515, c/o GeoQuest, 5599 San Felipe, Suite 1700, Houston, Texas 77056-2722

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of First inventor (given name, family name) **OMER M. GURPINAR**

First Inventor's Signature _____ Date _____

Residence: 452 Monroe Street, Denver, Colorado 80206 **Citizenship:** Canada

P.O. Address: 452 Monroe Street, Denver, Colorado 80206

[XXX] Additional inventors are being named on separately numbered sheets attached hereto.

Lactation performance	
Parameter	Unit
1.1	kg
1.2	kg
1.3	kg
1.4	kg
1.5	kg
1.6	kg
1.7	kg
1.8	kg
1.9	kg
2.0	kg
2.1	kg
2.2	kg
2.3	kg
2.4	kg
2.5	kg
2.6	kg
2.7	kg
2.8	kg
2.9	kg
3.0	kg
3.1	kg
3.2	kg
3.3	kg
3.4	kg
3.5	kg
3.6	kg
3.7	kg
3.8	kg
3.9	kg
4.0	kg
4.1	kg
4.2	kg
4.3	kg
4.4	kg
4.5	kg
4.6	kg
4.7	kg
4.8	kg
4.9	kg
5.0	kg
5.1	kg
5.2	kg
5.3	kg
5.4	kg
5.5	kg
5.6	kg
5.7	kg
5.8	kg
5.9	kg
6.0	kg
6.1	kg
6.2	kg
6.3	kg
6.4	kg
6.5	kg
6.6	kg
6.7	kg
6.8	kg
6.9	kg
7.0	kg
7.1	kg
7.2	kg
7.3	kg
7.4	kg
7.5	kg
7.6	kg
7.7	kg
7.8	kg
7.9	kg
8.0	kg
8.1	kg
8.2	kg
8.3	kg
8.4	kg
8.5	kg
8.6	kg
8.7	kg
8.8	kg
8.9	kg
9.0	kg
9.1	kg
9.2	kg
9.3	kg
9.4	kg
9.5	kg
9.6	kg
9.7	kg
9.8	kg
9.9	kg
10.0	kg
10.1	kg
10.2	kg
10.3	kg
10.4	kg
10.5	kg
10.6	kg
10.7	kg
10.8	kg
10.9	kg
11.0	kg
11.1	kg
11.2	kg
11.3	kg
11.4	kg
11.5	kg
11.6	kg
11.7	kg
11.8	kg
11.9	kg
12.0	kg
12.1	kg
12.2	kg
12.3	kg
12.4	kg
12.5	kg
12.6	kg
12.7	kg
12.8	kg
12.9	kg
13.0	kg
13.1	kg
13.2	kg
13.3	kg
13.4	kg
13.5	kg
13.6	kg
13.7	kg
13.8	kg
13.9	kg
14.0	kg
14.1	kg
14.2	kg
14.3	kg
14.4	kg
14.5	kg
14.6	kg
14.7	kg
14.8	kg
14.9	kg
15.0	kg
15.1	kg
15.2	kg
15.3	kg
15.4	kg
15.5	kg
15.6	kg
15.7	kg
15.8	kg
15.9	kg
16.0	kg
16.1	kg
16.2	kg
16.3	kg
16.4	kg
16.5	kg
16.6	kg
16.7	kg
16.8	kg
16.9	kg
17.0	kg
17.1	kg
17.2	kg
17.3	kg
17.4	kg
17.5	kg
17.6	kg
17.7	kg
17.8	kg
17.9	kg
18.0	kg
18.1	kg
18.2	kg

Residence: 22506 Bridgehaven Drive, Katy, Texas 77494 **Citizenship:** U.S.A.

Full name of Third inventor (given name, family name) **VIDYA B. VERMA**

Residence: 4618 Jamaica Drive, Sugar Land, Texas 77479 **Citizenship:** U.S.A.

Full name of Fourth inventor (given name, family name) **PHILIP W. PANTELLA**

Residence: 9031 33rd Ave N.W. Calgary, Alberta, Canada T3B 1M2 **Citizenship:** Canada

P.O. Address: 9031 33rd Ave N.W. Calgary, Alberta, Canada T3B 1M2